AUK 1001/0204/04

AEG Built-in Brochure

Colour Reproduction: We take great care in the photography of products illustrated in this brochure. Due to variables in the photographic and printing processes, colours may vary from the actual product.
Marketing Policy: The policy of AEG Domestic Appliances is one of continued improvement. We therefore reserve the right to alter or amend specifications/dimensions without notice. All specifications/dimensions including installation dimensions should be checked with the appropriate instruction booklet before use or installation. If in doubt, contact your local AEG stockist who regularly receives up to date product information from our Marketing Department.

AEG Domestic Appliances is a division of Electrolux plc.
Registered in England No. 2331516.
Registered office, 101 Oakley Road, Luton LU4 9QQ

AEG Domestic Appliances
55-77 High Street, Slough
Berkshire SL1 1DZ
Telephone: (08705) 350350
www.aeg.co.uk

AEG Domestic Appliances
Long Mile Road
Dublin 12
Tel: 00353 1 4090750
www.aeg.co.uk
Registered in Ireland No. 9118.
Registered office:
Long Mile Road, Dublin 12.

PERFEKT IN FORM UND FUNKTION AEG

built-in range

OVENS | MICROWAVES | HOBS | HOODS | COFFEE MACHINES | DISHWASHING | LAUNDRY | COOLING

function

FORM

PERFEKT IN FORM UND FUNKTION AEG

introduction

Advanced engineering from Germany ensures all AEG appliances deliver outstanding performance, durability and efficiency. And with design developed in the early 20th Century by the renowned German 'Bauhaus' designer, Peter Behrens, the AEG design foundations and values were established.

Unique to AEG, Alutec® is a designer finish applied to several appliances across the range. A lighter alternative to stainless steel, this unique treated aluminium complements any type of kitchen furniture whilst being highly scratch resistant, easy to clean and fingermark proof.

FORM DESIGN EXCELLENCE

function cooking perfection

CONTENTS

Introduction to AEG
2 – 3

Ovens
4 – 15

Microwaves
16 – 19

Hobs
20 – 39

Hoods
40 – 49

Coffee Machines
50 – 53

Dishwashing
54 – 61

Laundry
62 – 65

Cooling
66 – 76

Technical Specifications
77 – 90

Installation Diagrams
91 – 101

After-Sales Support
103

Internationaler Designpreis Baden-Württemberg 1998 Auszeichnung

reddot design award
winner 2004

Design Award Winner 2004

Considered to be the 'Father of Functional Form', Peter Behrens' influence still lives on today with 'Form' being a key element of AEG's success.

Raymond Blanc

AEG's success is something that is recognised by the famous chef Raymond Blanc who uses AEG appliances not only to equip his famous cookery school at Le Manoir aux Quat' Saisons, but also his own home.

ovens

Telescopic shelf runners enable baking trays and wire shelves to be pulled out fully for safe and easy access to the food.

FORM AWARD WINNING DESIGN

AEG ovens have high performance design built in, receiving several design awards including the prestigious IF Design Award 2004.

Design Award Winner 2004

function rewarding results

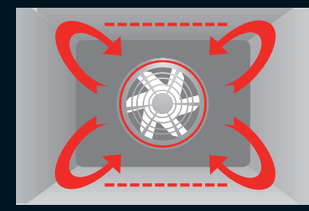

Ventitherm® Precision is the ultimate in true fan cooking. It does not require pre-heating, which saves energy and its precise temperature control delivers even cooking throughout.

With a range of Single, Double and Double Undercounter ovens in a variety of colours, AEG offers an array of truly unique technology from a Multifunction Oven with Fully Integrated Steam Functions to a Double Oven with Menu Guided Digital Cooking.

Oven Functions

Pyroluxe® cleaning

PYROLYTIC AUTO CLEANING SYSTEM Cleans the oven by burning off the most stubborn cooking residues, leaving only ash to simply wipe away with a damp cloth when the oven has cooled. Once the Pyroluxe® setting is selected, the temperature rises to 500°C, locking the oven door at 300°C for safety. And with the quadruple glazed door reducing surface temperatures, the AEG Pyroluxe® oven door is safe to touch even at 500°C. Pyroluxe® keeps your oven hygienically clean without using chemicals and costs less than most household oven cleaners. Light Cleaning and Intensive Cleaning options available.

Steam cooking

VIGOROUS STEAM The steam generator works with a fixed temperature at 96°C. Ideal for vegetables, rice, fish and reheating meals.

INTERVAL STEAM Alternates steam and hot air, 25% steam and 75% hot air. Ideal for roasting, baking and complete meal cooking.

VENTITHERM® PRECISION The fan gently circulates hot air throughout the oven to give an even temperature. The ring element, top and bottom elements are electronically controlled to give the optimum temperature throughout the oven cavity, resulting in perfect cooking and energy efficiency.

Ventitherm® Precision's electronic controls also allow a greater range of cooking temperatures from 30°C to 300°C.

OVEN FUNCTIONS This symbol represents the number of oven functions.

VENTITHERM® The fan gently circulates hot air throughout the oven to give an even temperature. Ventitherm® offers a range of benefits; does not require preheating, prevents transfer of flavours, keeps the oven cleaner and in turn, saves energy.

DUAL CIRCUIT VARIABLE GRILL Uses the inner and outer part of the grill element, to provide full width even grilling, ideal for 6 slices of toast.

ECONOMY GRILL Uses the inner part of the grill element, ideal for smaller portions such as 4 slices of toast. And by only using one element it saves energy.

FAST GRILL Heats up in less than 3 seconds. 20 x faster than a conventional grill, reduces grilling time by up to 50% with a 60% improvement in energy efficiency, compared to a standard grill element.

FAN CONTROLLED DEFROSTING Suitable for delicate items such as cream cakes, this light defrost circulates room temperature air around the food slowly, defrosting it in less than ½ the time.

ROTITHERM ROASTING The fan circulates hot air from the top element for the perfect authentic spit roast effect for meat, poultry and roasting potatoes, offering the benefits of rotisserie without the mess.

CONVENTIONAL COOKING Heat from the top and bottom elements provide traditional cooking for the professional cook. Ideal for baking bread and cakes.

PIZZA SETTING The fan circulates hot air from the top and bottom elements for a crisp pizza base yet perfectly melted cheese on top.

SPEEDCOOK Prevents the need to preheat the oven for all types of food - ideal for cooking convenience foods. These foods can be cooked in the exact cooking time that is specified on the packet.

HOT AIR FAN BAKING The fan circulates hot air, which is generated by the bottom element and ring element for perfect results when batch baking.

TEMPERATURE PROBE The electronic meat probe takes the guesswork out of cooking and provides perfect cooking results every time.

KEEP WARM Heat from the top and bottom elements are used to maintain a temperature of 80°C, ideal for keeping food warm until ready to serve.

BASE HEAT FINISHING Heat from the bottom element only, ideal for reheating pies and pastries, keeps the pastry crisp.

TOP HEAT BROWNING Heat from the top element only, ideal for browning lasagne or shepherd's pie.

CLEANING FEATURES

HEAT ACTIVATED CATALYTIC CLEANING A catalytic coating to the top and sides of the oven absorb the grease from cooking and with regular heating to 220°C the grease residue is burned away.

DIAMOND GLAZED ENAMEL INTERIOR A smooth enamel interior for ease of cleaning.

FULL GLASS INNER DOOR WITH REMOVABLE PANES All AEG single and double ovens have full glass inner doors. Single and double in-column ovens have removable panes for easy cleaning.*

FOLD DOWN GRILL Folds down to enable oven roof to be cleaned easily.

OVEN FEATURES

LCD FULLY ELECTRONIC DISPLAY Menu Guided Digital Cooking with LCD Display.
1. Scrolls through the oven functions indicating functions available to select.
2. Displays the recommended cooking temperature.
3. Indicates when the desired temperature is achieved.
4. Measures how long the oven has been on.
5. Removes the guess work from cooking and gives precise control for ease of use.

LED DIGITAL DISPLAY Menu Guided Temperature Control with LED Display.
1. Displays the recommended cooking temperature.
2. Indicates when the desired temperature is achieved.

24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
1. Displays the time.
2. Counts down how long the food has been in the oven with an audible signal.
3. The oven can be programmed to switch on and begin cooking and then switch off after a set duration. Giving you full control over your cooking.

CONTROLS A range of digital touch, digital push button, digital rotary, retractable rotary, standard rotary controls.

OVEN ILLUMINATION A selection of Halogen, 50W, 40W or 25W lighting is available in all AEG ovens, depending on individual model.

COOKING ACCESSORIES

MEAT PAN Full width deep meat pan suitable for roasting.

GRILL PAN AND HANDLE* AEG Ovens come with a grill pan & handle*.

PIZZA STONE For cooking perfectly authentic stone baked pizzas.

BAKING SHELF Full width shallow shelf suitable for baking.

TELESCOPIC SHELF RUNNERS Additional accessory which enables baking shelves and wire shelves to be pulled out fully. They glide out effortlessly with a smooth rolling action.

SAFETY FEATURES

ISOFRONT® & ISOFRONT® PLUS Double/triple/quadruple glazed door. Multi-layered glass panes, with heat reflective coating, to keep the heat in the oven.

AUTO SAFETY SWITCH OFF The oven automatically switches off when it is left on for too long (time and temperature dependant).

CHILD LOCK Oven controls can be locked to prevent misuse.

Energy rating All Electric Ovens must now declare their energy rating. All AEG ovens are either A or B rated. For Electric Double Ovens, both main and top oven are rated for their energy consumption.

*Excludes B81394 & CB89201.

AEG ovens

engineered for cooking not cleaning

VENTITHERM® Precision Digital Multifunction Oven with PYROLUXE® total auto cleaning system and interactive digital cooking display

COMPETENCE B88714

13

OVEN FUNCTIONS

- LIGHT PYROLUXE® CLEANING
- INTENSIVE PYROLUXE® CLEANING
- VENTITHERM® PRECISION
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- SPEEDCOOK
- HOT AIR FAN BAKING
- TEMPERATURE PROBE
- KEEP WARM

OVEN FEATURES

- LCD FULLY ELECTRONIC DISPLAY WITH MENU GUIDED DIGITAL COOKING
- 24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
- PUSH BUTTON DIGITAL CONTROLS
- 20W HALOGEN & 40W INTERIOR LIGHTS

OVEN ACCESSORIES

- FULL WIDTH MEAT PAN
- GRILL PAN AND HANDLE
- TELESCOPIC SHELF RUNNERS (OPTIONAL: CBAZ21)

CLEANING FEATURES

- DIAMOND GLAZED ENAMEL INTERIOR FOR PYROLUXE® CLEANING
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES

- ISOFRONT® PLUS QUADRUPLE GLAZED DOOR
- AUTO SAFETY SWITCH OFF & CHILD SAFETY LOCK
- SNAP IN ENAMEL SHELF SUPPORTS FOR 3 AUTO-STOP ANTI-TIP CHROME SHELVES

ENERGY RATING A

STAINLESS STEEL B88714m
ALUTEC® B88714a (SHOWN)

PERFEKT IN FORM UND FUNKTION AEG

World's only Multifunction Single Oven with Fully Integrated Steam Functions

COMPETENCE CB89201

11

OVEN FUNCTIONS
- VIGOROUS STEAM
- INTERVAL STEAM
- VENTITHERM®
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- TEMPERATURE PROBE
- KEEP WARM

OVEN FEATURES
- LCD FULLY ELECTRONIC DISPLAY WITH MENU GUIDED COOKING
- 24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
- DIGITAL TOUCH CONTROLS
- 50W INTERIOR LIGHT

OVEN ACCESSORIES
- FULL WIDTH MEAT PAN
- GRILL SHELF
- TELESCOPIC SHELF RUNNERS (OPTIONAL: BAZ3STEAM)

CLEANING FEATURES
- DIAMOND-GLAZED ENAMEL INTERIOR
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES
- ISOFRONT® PLUS TRIPLE GLAZED DOOR
- SNAP IN SHELF SUPPORTS FOR AUTO-STOP ANTI-TIP CHROME SHELVES
- AUTO SAFETY SWITCH OFF & CHILD SAFETY LOCK

ENERGY RATING A

STAINLESS STEEL CB89201m
ALUTEC® CB89201a (SHOWN ABOVE)

90cm Multifunction Single Oven with 11 Functions

COMPETENCE B81394

11

OVEN FUNCTIONS
- VENTITHERM®
- DUAL CIRCUIT VARIABLE GRILL - FOLD DOWN
- ECONOMY GRILL
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- SPEEDCOOK
- BASE HEAT FINISHING
- TOP HEAT BROWNING
- TEMPERATURE PROBE

OVEN FEATURES
- LED DIGITAL DISPLAY
- 24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
- ILLUMINATED RETRACTABLE CONTROL KNOBS
- 20W HALOGEN INTERIOR LIGHTS

OVEN ACCESSORIES
- FULL WIDTH MEAT OR GRILL PAN
- PIZZA STONE
- 2 BAKING SHELVES

CLEANING FEATURES
- DIAMOND-GLAZED ENAMEL INTERIOR
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES
- ISOFRONT® PLUS TRIPLE GLAZED DOOR
- SNAP IN SHELF SUPPORTS FOR AUTO-STOP ANTI-TIP SHELVES

ENERGY RATING B

STAINLESS STEEL B81394m (SHOWN ABOVE)

VENTITHERM® Precision Digital Multifunction Oven with PYROLUXE® Total Auto Cleaning System

COMPETENCE B57414

9

OVEN FUNCTIONS
- LIGHT PYROLUXE® CLEANING
- INTENSIVE PYROLUXE® CLEANING
- VENTITHERM® PRECISION
- DUAL CIRCUIT VARIABLE GRILL
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- SPEEDCOOK

OVEN FEATURES
- LED DIGITAL DISPLAY
- 24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
- RETRACTABLE CONTROL KNOBS WITH DIGITAL TEMPERATURE REGULATION
- 40W INTERIOR LIGHT

OVEN ACCESSORIES
- FULL WIDTH MEAT PAN
- GRILL PAN AND HANDLE
- TELESCOPIC SHELF RUNNERS (OPTIONAL: CBAZ21)

CLEANING FEATURES
- DIAMOND GLAZED ENAMEL INTERIOR FOR PYROLUXE® CLEANING
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES
- ISOFRONT® PLUS QUADRUPLE GLAZED DOOR
- SNAP IN ENAMEL SHELF SUPPORTS FOR 3 AUTO-STOP ANTI-TIP CHROME SHELVES
- AUTO SAFETY SWITCH OFF & CHILD SAFETY LOCK

ENERGY RATING A

WHITE B57414w
BLACK B57414b (SHOWN ABOVE)
ALUTEC® B57414a
STAINLESS STEEL B57414m

Single Multifunction Oven with 8 Functions

COMPETENCE B41014

8

OVEN FUNCTIONS
- VENTITHERM®
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- BASE HEAT FINISHING

OVEN FEATURES
- LED DIGITAL DISPLAY
- 24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
- RETRACTABLE CONTROL KNOBS
- 40W INTERIOR LIGHT

OVEN ACCESSORIES
- FULL WIDTH MEAT PAN
- GRILL PAN AND HANDLE
- TELESCOPIC SHELF RUNNERS (OPTIONAL: CBAZ21)

CLEANING FEATURES
- HEAT ACTIVATED CATALYTIC CLEANING
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES
- ISOFRONT® PLUS TRIPLE GLAZED DOOR
- SNAP IN SHELF SUPPORTS FOR 2 AUTO-STOP ANTI-TIP CHROME SHELVES

ENERGY RATING A

STAINLESS STEEL B41014m (SHOWN ABOVE)
WHITE B41014w
BLACK B41014b
ALUTEC® B41014a

AEG

single ovens

Single Multifunction Oven
with 5 Functions

COMPETENCE B31014

5

OVEN FUNCTIONS

- VENTITHERM®
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING

OVEN FEATURES

- LED DIGITAL DISPLAY
- 24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
- RETRACTABLE CONTROL KNOBS
- 40W INTERIOR LIGHT

OVEN ACCESSORIES

- GRILL PAN AND HANDLE
- TELESCOPIC SHELF RUNNERS (OPTIONAL: CBAZ21)

CLEANING FEATURES

- HEAT ACTIVATED CATALYTIC CLEANING
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES

- ISOFRONT® PLUS TRIPLE GLAZED DOOR
- SNAP IN SHELF SUPPORTS FOR 2 AUTO-STOP ANTI-TIP CHROME SHELVES

ENERGY RATING A

STAINLESS STEEL **B31014m** (SHOWN ABOVE)
WHITE B31014w
BLACK B31014b
DARK BROWN B31014d

Single VENTITHERM® Oven
with 4 Functions

COMPETENCE B21004

4

OVEN FUNCTIONS

- VENTITHERM®
- DUAL CIRCUIT VARIABLE GRILL – FOLD DOWN
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING

OVEN FEATURES

- LED DIGITAL DISPLAY
- 24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
- ROTARY CONTROLS
- 25W INTERIOR LIGHT

OVEN ACCESSORIES

- GRILL PAN AND HANDLE
- TELESCOPIC SHELF RUNNERS (OPTIONAL: CBAZ21)

CLEANING FEATURES

- DIAMOND GLAZED ENAMEL INTERIOR
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES

- ISOFRONT® PLUS TRIPLE GLAZED DOOR
- SNAP IN SHELF SUPPORTS FOR 2 AUTO-STOP ANTI-TIP CHROME SHELVES

ENERGY RATING A

STAINLESS STEEL B21004m
WHITE B21004w
BLACK B21004b (SHOWN ABOVE)

Single VENTITHERM® Oven
with 3 Functions

COMPETENCE B11804

3

OVEN FUNCTIONS

- VENTITHERM®
- DUAL CIRCUIT VARIABLE GRILL – FOLD DOWN
- FAN CONTROLLED DEFROSTING

OVEN FEATURES

- LED DIGITAL DISPLAY
- 24 HOUR ELECTRONIC CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE TIMER
- ROTARY CONTROLS
- 25W INTERIOR LIGHT

OVEN ACCESSORIES

- GRILL PAN AND HANDLE
- TELESCOPIC SHELF RUNNERS (OPTIONAL: CBAZ21)

CLEANING FEATURES

- DIAMOND GLAZED ENAMEL INTERIOR
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES

- ISOFRONT® DOUBLE GLAZED DOOR
- SNAP IN SHELF SUPPORTS FOR 2 AUTO-STOP ANTI-TIP CHROME SHELVES

ENERGY RATING A

STAINLESS STEEL **B11804m** (SHOWN ABOVE)
WHITE B11804w
BLACK B11804b

double under-counter ovens

VENTITHERM® Multifunction
Double Under-counter Oven with
8 Main & 7 Top Oven Functions

COMPETENCE U71014

8

MAIN OVEN FUNCTIONS

- VENTITHERM®
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- SPEEDCOOK
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL

ENERGY RATING B

OVEN FEATURES

- 24 HOUR LED CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE OVEN TIMER
- ILLUMINATED RETRACTABLE CONTROL KNOBS
- 20W HALOGEN & 25W INTERIOR LIGHT

OVEN ACCESSORIES

- FULL WIDTH GRILL PAN IN TOP OVEN

CLEANING FEATURES

- HEAT ACTIVATED CATALYTIC CLEANING

SAFETY FEATURES

- ISOFRONT® DOUBLE GLAZED DOOR
- 4 AUTO-STOP ANTI-TIP CHROME SHELVES

STAINLESS STEEL **U71014m** (SHOWN ABOVE)
ALUTEC® U71014a

7

TOP OVEN FUNCTIONS

- FAN ASSISTED COOKING
- CONVENTIONAL COOKING
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- DUAL CIRCUIT GRILL
- ECONOMY GRILL
- TOP HEAT BROWNING

ENERGY RATING A

VENTITHERM® Double Under-counter Oven
with 2 Main & 3 Top Oven Functions

COMPETENCE U31004

2

MAIN OVEN FUNCTIONS

- VENTITHERM®
- FAN CONTROLLED DEFROSTING

ENERGY RATING B

OVEN FEATURES

- 24 HOUR LED CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE OVEN TIMER
- ROTARY CONTROL KNOBS
- 25W INTERIOR LIGHT TO BOTH OVENS

OVEN ACCESSORIES

- FULL WIDTH GRILL PAN IN TOP OVEN

CLEANING FEATURES

- HEAT ACTIVATED CATALYTIC CLEANING

SAFETY FEATURES

- ISOFRONT® DOUBLE GLAZED DOOR
- 3 AUTO-STOP ANTI-TIP CHROME SHELVES

WHITE **U31004w** (SHOWN ABOVE)
BLACK U31004b
DARK BROWN U31004d
STAINLESS STEEL U31004m

3

TOP OVEN FUNCTIONS

- CONVENTIONAL COOKING
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL

ENERGY RATING A

AEG

AEG double ovens

2 ovens, one control

COMPETENCE D88004

11 | 6

MAIN OVEN FUNCTIONS
- VENTITHERM® PRECISION
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- SPEEDCOOK
- FULL WIDTH VARIABLE GRILL
- ECONOMY GRILL
- HOT AIR BAKING
- BASE HEAT FINISHING AND REHEATING
- KEEP WARM
- ENERGY RATING A

TOP OVEN FUNCTIONS
- CONVENTIONAL COOKING
- DUAL CIRCUIT VARIABLE GRILL
- SPEEDCOOK
- ECONOMY GRILL
- BASE HEAT FINISHING AND REHEATING
- KEEP WARM
- ENERGY RATING B

OVEN FEATURES
- LCD FULLY ELECTRONIC DISPLAY WITH MENU GUIDED DIGITAL COOKING
- 24 HOUR LCD CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE DIGITAL OVEN TIMER
- PUSH BUTTON DIGITAL CONTROLS
- 20w HALOGEN & 25w INTERIOR LIGHT

OVEN ACCESSORIES
- FULL WIDTH MEAT PAN / GRILL PAN WITH HANDLES
- TELESCOPIC SHELF RUNNERS (OPTIONAL: BAZD03)

CLEANING FEATURES
- HEAT ACTIVATED CATALYTIC CLEANING
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES
- ISOFRONT® DOUBLE GLAZED DOORS
- SNAP IN SHELF SUPPORTS FOR 4 AUTO-STOP ANTI-TIP CHROME SHELVES
- AUTO SAFETY SWITCH OFF & CHILD SAFETY LOCK

STAINLESS STEEL D88004m (SHOWN ABOVE)
ALUTEC® D88004a

VENTITHERM® Precision Digital Multifunction Double Oven with interactive digital cooking display

Digital Multifunction Double Oven with 7 Main & 3 Top Oven Functions

COMPETENCE D57014

7 | » | 3

MAIN OVEN FUNCTIONS
- VENTITHERM® PRECISION
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- SPEEDCOOK
- FULL WIDTH VARIABLE GRILL
- ENERGY RATING A

TOP OVEN FUNCTIONS
- CONVENTIONAL COOKING
- DUAL VARIABLE FAST GRILL
- SINGLE VARIABLE FAST GRILL
- ENERGY RATING A

OVEN FEATURES
- 24 HOUR LED CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE DIGITAL OVEN TIMER
- RETRACTABLE CONTROLS WITH DIGITAL TEMPERATURE REGULATION
- 25w INTERIOR LIGHT TO BOTH OVENS

OVEN ACCESSORIES
- FULL WIDTH MEAT PAN / GRILL PAN WITH HANDLES
- TELESCOPIC SHELF RUNNERS (OPTIONAL: BAZD03)

CLEANING FEATURES
- HEAT ACTIVATED CATALYTIC CLEANING
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES
- ISOFRONT® DOUBLE GLAZED DOORS
- SNAP IN SHELF SUPPORTS FOR 4 AUTO-STOP ANTI-TIP CHROME SHELVES
- AUTO SAFETY SWITCH OFF & CHILD SAFETY LOCK TO MAIN OVEN

STAINLESS STEEL D57014m (SHOWN ABOVE)
ALUTEC® D57014a

VENTITHERM® Multifunction Double Oven with 8 Main & 3 Top Oven Functions

COMPETENCE D41014

8

MAIN OVEN FUNCTIONS
- VENTITHERM®
- FAN CONTROLLED DEFROSTING
- ROTITHERM ROASTING
- CONVENTIONAL COOKING
- PIZZA SETTING
- SPEEDCOOK
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL
- ENERGY RATING B

3

TOP OVEN FUNCTIONS
- CONVENTIONAL COOKING
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL
- ENERGY RATING B

OVEN FEATURES
- 24 HOUR LED CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE OVEN TIMER
- RETRACTABLE CONTROLS
- 25w INTERIOR LIGHT TO BOTH OVENS

OVEN ACCESSORIES
- FULL WIDTH MEAT PAN / GRILL PAN WITH HANDLES
- TELESCOPIC SHELF RUNNERS (OPTIONAL: BAZD03)

CLEANING FEATURES
- DIAMOND-GLAZED ENAMEL INTERIOR AND DROP DOWN GRILLS
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES
- ISOFRONT® DOUBLE GLAZED DOORS
- SNAP IN SHELF SUPPORTS FOR 3 AUTO-STOP ANTI-TIP CHROME SHELVES

STAINLESS STEEL D41014m
ALUTEC® D41014a
WHITE D41014w (SHOWN ABOVE)
BLACK D41014b

VENTITHERM® Double Oven with 2 Main & 3 Top Oven Functions

COMPETENCE D21004

2

MAIN OVEN FUNCTIONS
- VENTITHERM®
- FAN CONTROLLED DEFROSTING
- ENERGY RATING A

3

TOP OVEN FUNCTIONS
- CONVENTIONAL COOKING
- DUAL CIRCUIT VARIABLE GRILL
- ECONOMY GRILL
- ENERGY RATING B

OVEN FEATURES
- 24 HOUR LED CLOCK, MINUTE MINDER AND FULLY PROGRAMMABLE OVEN TIMER
- ROTARY CONTROLS
- 25w INTERIOR LIGHT TO BOTH OVENS

OVEN ACCESSORIES
- FULL WIDTH MEAT PAN / GRILL PAN WITH HANDLES
- TELESCOPIC SHELF RUNNERS (OPTIONAL: BAZD03)

CLEANING FEATURES
- DIAMOND-GLAZED ENAMEL INTERIOR AND DROP DOWN GRILL
- FULL GLASS INNER DOOR WITH PANORAMIC VIEWING WINDOW

SAFETY FEATURES
- ISOFRONT® DOUBLE GLAZED DOORS
- SNAP IN SHELF SUPPORTS FOR 3 AUTO-STOP ANTI-TIP CHROME SHELVES

STAINLESS STEEL D21004m (SHOWN ABOVE)
WHITE D21004w
BLACK D21004b
DARK BROWN D21004d

AEG

90cm Mixed Fuel Range Cooker
with Gas Hob

COMPETENCE C41029Gm (90cm)

8

MAIN OVEN FUNCTIONS

- VENTITHERM®
- ROTISSERIE
- CONVENTIONAL COOKING
- ROTITHERM ROASTING
- BASE HEAT FINISHING
- TOP HEAT BROWNING
- FAN CONTROLLED DEFROSTING
- DUAL CIRCUIT VARIABLE GRILL

ENERGY RATING B

6

GAS HOB PERFORMANCE

- 6 BURNERS:
- 1 OVAL
- 1 RAPID
- 1 SEMI-RAPID
- 2 SIMMER
- 1 WOK BURNER WITH STAND
- CAST IRON PAN SUPPORTS

COOKER FEATURES

- DOUBLE GLAZED
- AUTO-STOP ANTI-TIP CHROME SHELVES
- DIAMOND GLAZED ENAMEL INTERIOR
- INTERIOR LIGHT
- 24 HOUR LED CLOCK WITH MINUTE MINDER & FULLY PROGRAMMABLE OVEN TIMER
- ROTARY CONTROLS

90cm Electric Range Cooker
with Ceramic Hob

COMPETENCE C41029Vm (90cm)

8

MAIN OVEN FUNCTIONS

- VENTITHERM®
- ROTISSERIE
- CONVENTIONAL COOKING
- ROTITHERM ROASTING
- BASE HEAT FINISHING
- TOP HEAT BROWNING
- FAN CONTROLLED DEFROSTING
- DUAL CIRCUIT VARIABLE GRILL

ENERGY RATING B

5

CERAMIC HOB PERFORMANCE

- 5 ZONES:
- 1 MULTI-PURPOSE HILIGHT ZONE
- 1 TRIPLE HILIGHT ZONE
- 2 SINGLE ZONES
- 1 DUAL ZONE

COOKER FEATURES

- DOUBLE GLAZED
- AUTO-STOP ANTI-TIP CHROME SHELVES
- DIAMOND GLAZED ENAMEL INTERIOR
- INTERIOR LIGHT
- 24 HOUR LED CLOCK WITH MINUTE MINDER & FULLY PROGRAMMABLE DIGITAL OVEN TIMER
- ROTARY CONTROLS

100cm Double Oven Mixed Fuel
Range Cooker with Gas Hob and
Cast Iron Griddle

COMPETENCE C41022Gm (100cm)

7

MAIN OVEN FUNCTIONS

- VENTITHERM®
- CONVENTIONAL COOKING
- ROTITHERM ROASTING
- BASE HEAT FINISHING
- TOP HEAT BROWNING
- FAN CONTROLLED DEFROSTING
- DUAL CIRCUIT VARIABLE GRILL

ENERGY RATING B

5

SIDE OVEN FUNCTIONS

- CONVENTIONAL COOKING
- BASE HEAT FINISHING
- TOP HEAT BROWNING
- ROTISSERIE
- GRILL

ENERGY RATING B

4

GAS HOB PERFORMANCE

- 4 BURNERS:
- 1 RAPID
- 1 SEMI-RAPID
- 1 SIMMER
- 1 WOK BURNER WITH STAND
- CAST IRON GRIDDLE WITH CERAMIC BASE
- CAST IRON PAN SUPPORTS

COOKER FEATURES

- DOUBLE GLAZED
- AUTO-STOP ANTI-TIP CHROME SHELVES
- DIAMOND GLAZED ENAMEL INTERIOR
- INTERIOR LIGHT
- 24 HOUR LED CLOCK WITH MINUTE MINDER & FULLY PROGRAMMABLE DIGITAL TIMER
- ROTARY CONTROLS

100cm Electric Double Oven Range Cooker
with Ceramic Hob

COMPETENCE C41022Vm (100cm)

7

MAIN OVEN FUNCTIONS

- VENTITHERM®
- CONVENTIONAL COOKING
- ROTITHERM ROASTING
- BASE HEAT FINISHING
- TOP HEAT BROWNING
- FAN CONTROLLED DEFROSTING
- DUAL CIRCUIT VARIABLE GRILL

ENERGY RATING B

5

SIDE OVEN FUNCTIONS

- CONVENTIONAL COOKING
- BASE HEAT FINISHING
- TOP HEAT BROWNING
- ROTISSERIE
- GRILL

ENERGY RATING B

5

CERAMIC HOB PERFORMANCE

- 5 ZONES:
- 1 MULTI-PURPOSE HILIGHT ZONE
- 1 TRIPLE HILIGHT ZONE
- 2 SINGLE ZONES
- 1 DUAL ZONE

COOKER FEATURES

- DOUBLE GLAZED
- AUTO-STOP ANTI-TIP CHROME SHELVES
- DIAMOND GLAZED ENAMEL INTERIOR
- INTERIOR LIGHT
- 24 HOUR LED CLOCK WITH MINUTE MINDER & FULLY PROGRAMMABLE DIGITAL TIMER
- ROTARY CONTROLS

AEG

Microwave Functions

Fan cooking & Microwave

Combination microwave – Fan cooking with Microwave, for golden brown food cooked in about half the time.

Fan cooking

Hot air is circulated around the oven using a ring element and the fan, giving all the benefits of fan cooking.

GRILL & MICROWAVE Combination microwave - traditional grilling with microwave.

QUARTZ GRILL Faster heat up time than with a radiant grill and has a smooth surface for easy cleaning.

GRILL Ideal for grilling smaller items of food.

MICROWAVE Microwave energy creates friction with the moisture content of the food, which creates heat and cooks food quickly and conveniently.

MICROWAVE POWER LEVELS of 750W or 900W are available within the AEG range. Grill power may vary (if applicable).

AEG MICROWAVE OVENS are available in 3 sizes to suit all households; 30 litres, 24 litres and 17 litres.

RANGE OF MICROWAVE functions available from basic microwave functionality through to Combi Microwaves with Fan Ovens.

MICROWAVE FEATURES

24 HOUR CLOCK WITH AUTO TIMER Easy to set clock with a digital display and programmable timer.

ROTARY CONTROLS FOR LED DISPLAY Turn knob to select the power level, cooking time and also for selecting weight when using auto programmes.

CHILD LOCK On the combi oven for safety and peace of mind.

QUICK START CONTROL Starts on full power at the press of a button. Each operation gives 30 seconds of cooking (or 1 minute on the combi). Can be pressed up to 5 times continuously for convenience.

AUDIBLE COOKING END SIGNAL Indicates when the food is ready.

BRIGHT OVEN LIGHT Easy to see inside.

FOLD DOWN GRILL Folds down to enable oven roof to be easily cleaned.

INTEGRATED TURNTABLE WITH ON/OFF SWITCH Enables the user to cook foods that are in a larger dish without touching the side of the microwave.

FAST PROGRAMMING On the combi, fast setting of time and delay start option.

3 AUTO COOK PROGRAMMES Fast programming for microwave cooking, select the food type and weight and the oven does the rest.

3 AUTO COOK AND GRILL PROGRAMMES Fast programming for microwave with grill cooking, select the food type and weight and the oven does the rest.

4 AUTO WEIGHT DEFROST PROGRAMMES Provides ease of use with defrosting, just select the food type and weight and the oven does the rest.

CRUNCH FUNCTION Ideal for crispy pizzas.

MICROWAVE ACCESSORIES

For convenience, the interior of the combi microwave is furnished as a fan oven with shelf supports, oven/grill shelf and ceramic roasting tray.

Grill models include a special grill rack. The MCD3534E with crunch function also includes a pizza dish.

INSTALLATION

AEG combi microwave oven is fully built-in with side carrying handles for convenience and easy installation.

Solo and duo microwave ovens can be built-in to your kitchen furniture with an optional colour matched kit. There is also a special kit for suspending the compact microwave beneath a wall cupboard.

AEG microwaves

more than just a quick means of cooking & defrosting food

Fully built-in COMBI microwave oven

MICROMAT CC663E

900W | 5 | 30Ltr

MICROWAVE FUNCTIONS

- 900W MICROWAVE WITH 6 POWER LEVELS
- POWERFUL 1500W FOLD DOWN GRILL
- COMBI MICROWAVE & GRILL COOKING
- FAN COOKING WITH TEMPERATURES FROM 50°C TO 250°C
- COMBI MICROWAVE & FAN COOKING

MICROWAVE FEATURES

- 24 HOUR DIGITAL CLOCK WITH AUTO TIMER AND DELAY START OPTION
- ROTARY CONTROL FOR LED DISPLAY
- CHILD LOCK
- QUICK START CONTROL
- AUDIBLE 'COOKING END' SIGNAL
- BRIGHT OVEN LIGHT
- INTEGRATED TURNTABLE WITH SWITCH OFF FACILITY
- FAST SETTING OF TIME AND DELAY START OPTION
- 4 AUTO WEIGHT DEFROSTING PROGRAMMES

MICROWAVE ACCESSORIES

- OVEN FURNISHED WITH SHELF SUPPORTS, OVEN SHELF & GLASS ROASTING TRAY
- FULLY BUILT-IN WITH SIDE CARRYING HANDLES, NO KIT REQUIRED

COLOURS		
	MCC663EM	STAINLESS STEEL
	MCC663EA	ALUTEC®
	MCC663EB	BLACK
	MCC663EW	WHITE

PERFEKT IN FORM UND FUNKTION

AEG

microwave
ovens with grill

Family size DUO Microwave Oven with Grill

MICROMAT CD3534E

900W | 3 | 24Ltr

MICROWAVE FUNCTIONS
- 900W MICROWAVE WITH 9 POWER LEVELS
- POWERFUL 1200W QUARTZ GRILL WITH 3 GRILL SETTINGS
- COMBI MICROWAVE & GRILL COOKING

MICROWAVE FEATURES
- 24 HOUR DIGITAL CLOCK WITH AUTO TIMER
- ROTARY CONTROLS FOR LED DISPLAY
- QUICK START CONTROL
- AUDIBLE 'COOKING END' SIGNAL
- BRIGHT OVEN LIGHT
- INTEGRATED TURNTABLE WITH SWITCH OFF FACILITY
- 3 AUTO WEIGHT COOKING PROGRAMMES
- 3 AUTO WEIGHT COMBI MICROWAVE AND GRILL PROGRAMMES
- 4 AUTO WEIGHT DEFROSTING PROGRAMMES
- CRUNCH FUNCTION FOR PIZZAS, FLANS ETC.

MICROWAVE ACCESSORIES
- SUPPLIED WITH PIZZA DISH AND HIGH GRILL RACK

INSTALLATION
- 60CM WIDE COLOUR MATCHED BUILT-IN KIT BF246X

COLOURS MCD3534EM STAINLESS STEL

Compact DUO Microwave Oven and Grill

MICROMAT CD343EU

750W | 3 | 17Ltr

MICROWAVE FUNCTIONS
- 750W MICROWAVE WITH 9 POWER LEVELS
- 1100W GRILL WITH 3 GRILL SETTINGS
- COMBI MICROWAVE & GRILL COOKING

MICROWAVE FEATURES
- 24 HOUR DIGITAL CLOCK WITH AUTO TIMER
- ROTARY CONTROLS FOR LED DISPLAY
- QUICK START CONTROL
- AUDIBLE 'COOKING END' SIGNAL
- BRIGHT OVEN LIGHT
- INTEGRATED TURNTABLE WITH SWITCH OFF FACILITY
- 3 AUTO WEIGHT COOKING PROGRAMMES
- 3 AUTO WEIGHT COMBI MICROWAVE AND GRILL PROGRAMMES
- 4 AUTO WEIGHT DEFROSTING PROGRAMMES

MICROWAVE ACCESSORIES
- GRILL RACK

INSTALLATION
- 50CM WIDE COLOUR MATCHED BUILT-IN KIT BF175X
- 60CM WIDE COLOUR MATCHED BUILT-IN KIT BF176X
- BUILT-UNDER KIT (BLACK) FOR SUSPENDING UNDER WALL CUPBOARDS UMS17B

COLOURS MCD343EUM STAINLESS STEEL

microwave
ovens

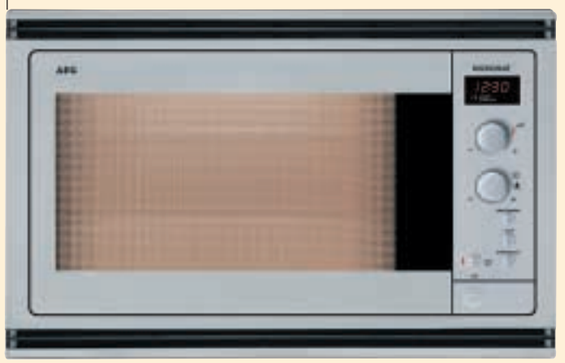

Family size SOLO Microwave Oven

MICROMAT C153E

900W | 1 | 24Ltr

MICROWAVE FUNCTIONS
- 900W MICROWAVE WITH 9 POWER LEVELS

MICROWAVE FEATURES
- 24 HOUR DIGITAL CLOCK WITH AUTO TIMER
- ROTARY CONTROLS FOR LED DISPLAY
- QUICK START CONTROL
- AUDIBLE 'COOKING END' SIGNAL
- BRIGHT OVEN LIGHT
- INTEGRATED TURNTABLE WITH SWITCH OFF FACILITY
- 3 AUTO WEIGHT COOKING PROGRAMMES
- 4 AUTO WEIGHT DEFROSTING PROGRAMMES

INSTALLATION
- 60CM WIDE COLOUR MATCHED BUILT-IN KIT BF246X/B/W/D

COLOURS MC153EM STAINLESS STEEL
MC1543EB BLACK
MC153EW WHITE
MC153ED DARK BROWN

Compact SOLO Microwave Oven

MICROMAT C143EU

750W | 1 | 17Ltr

MICROWAVE FUNCTIONS
- 750W MICROWAVE WITH 9 POWER LEVELS

MICROWAVE FEATURES
- 24 HOUR DIGITAL CLOCK WITH AUTO TIMER
- ROTARY CONTROLS FOR LED DISPLAY
- QUICK START CONTROL
- AUDIBLE 'COOKING END' SIGNAL
- BRIGHT OVEN LIGHT
- INTEGRATED TURNTABLE WITH SWITCH OFF FACILITY
- 3 AUTO WEIGHT COOKING PROGRAMMES
- 4 AUTO WEIGHT DEFROSTING PROGRAMMES

INSTALLATION
- 50CM WIDE COLOUR MATCHED BUILT-IN KIT BF175X/A
- 60CM WIDE COLOUR MATCHED BUILT-IN KIT BF176X/A
- BUILT-UNDER KIT (BLACK) FOR SUSPENDING UNDER WALL CUPBOARDS UMS17B

COLOURS MC143EUX STAINLESS STEEL
MC143EUA ALUTEC®

AEG

hobs

Front-Line Future

Front-Line Future Hobs have minimalist styling and a unique, designer appearance. Entirely modular with co-ordinated design, the range offers the flexibility and functionality to suit any kitchen.

FORM DESIGN SIMPLICITY

Gas hobs are perfectly formed with strong cast iron pan supports and beautifully simple rotary controls. AEG also offer Gas on Glass hobs, which are stylish and easy to clean.
With bevelled edges and smooth touch controls giving a sleek finish, AEG's ceramic and induction hobs will enhance the appearance of any kitchen.

FUNCTION responsive control

Gas hobs give instant heat, economy and controllability. In addition, AEG's special burner design produces a clean and perfect flame, giving total cooking flexibility and precise results.
Induction hobs offer fast and responsive cooking; the pan becomes hot yet the hob's smooth ceramic surface remains safe to touch. Energy is saved as only the exact amount needed for cooking is used, and cleaning is easy because nothing can bake on.

Front-Line Future

Gas, electric or induction? With AEG **Front-Line Future**, you can have it all. Touch controls, timers, safety and modular minimalist design are all elementary functions of any AEG Front-Line Future hob. See pages 32-38 for more details.

Electric Hob Features

Touch Controls with LED Display

Electronic touch controls ensure that all heat is precisely controlled.

BOOSTER For intense rapid heat up.

HIGHLY INTELLIGENT CONTROLS WITH LED DISPLAY Stop+go, Timer per Zone, Child Safety Lock and Control Lock.

STOP+GO This is pressed to pause during cooking. It takes the selected zone down to a minimum. It is restored back to the original setting when pressed again. This can also be used as a handy keep warm setting.

TIMER PER ZONE Up to 99 minutes may be selected for each cooking area. The hob will automatically turn off and an acoustic signal will sound, ensuring cooking perfection every time.

CHILD SAFETY LOCK Two controls can be pressed together to lock the hob in the off position to prevent children from accidently turning the hob on.

CONTROL LOCK This is used when the hob is on to prevent any alteration or activation of the hob's setting and can also be used to lock the hob in the off position for extra safety.

AUTO SAFETY SWITCH OFF Hob will automatically switch off if left on for excessive time periods.

RESIDUAL HEAT INDICATORS Safety - visually indicates that residual heat is left within the hob.

POT RECOGNITION INDICATORS The cooking zone will not operate when incorrect cookware is used or when no pan is on the hob and the controls are accidentally activated.

Electric Hob Performance

INDUCTION ZONE Works by creating a magnetic field between the hob components and the steel core of the saucepan. Quicker than gas, more controllable, easy to clean and very safe, AEG Induction hobs are perfect in form and function.

HILIGHT ZONE Ceramic cooking areas with a fine ribbon element under the glass to heat up in less than 5 seconds.

DUAL ZONE A cooking area with 2 zones. The inner zone can be activated individually when using smaller pans.

TRIPLE ZONE A ceramic cooking area comprising of three different sizes, which can be activated to match the size of saucepan being used.

MULTI-PURPOSE ZONE An elongated oval zone, which can be used as a single zone with just the round section activated, or extended to accommodate casserole dishes or fish kettles.

RED-DOT ZONES Red dots on sealed plate hobs represent fast and more powerful cooking zones.

AUTOMAX Following selection of a power level and cooking time, pressing automax brings the zone up to maximum and then following a preset time returns to the selected power level for the remainder of the cooking time.

Gas Hob Features

GAS ON GLASS Gas burners mounted on ceramic glass, stylish and easy to clean.

ENAMEL COATED PAN SUPPORTS Pan supports with an easy clean enamel coating.[1] Pan supports are removeable and dishwasher proof.

CAST IRON PAN SUPPORTS Professional appearance and a sturdy design. Cast Iron Pan supports can be removed and placed in a dishwasher for easy cleaning. Cast iron pan supports have non-slip silicon feet for even greater stability.[1]

REMOVABLE WOK SUPPORT Removable cast iron wok support perfect for stir fry,[1] can be placed in the dishwasher for easy cleaning.

LED DISPLAY An electronic display indicating the level of power that is in use.

SAFETY THERMOCOUPLES If the flame inadvertently goes out, the gas is shut off from the source, ensuring perfect safety.

AUTOMATIC INTEGRATED IGNITION All AEG gas hobs have integrated ignitions. The gas hob is lit automatically when the control knob is pushed and turned, in a single handed operation.

FRONT CONTROLS Burner controls are situated at the front of the hob for ease of reach, ideal for left or right handed cooks.

70cm HOBS All AEG 70cm Hobs can be fitted into a 60cm cut out and can be used with an AEG 60cm cooker hood*.

LPG KIT A kit which converts the hob for use with LPG (bottled gas).

Gas Hob Performance

BURNERS in different sizes - rapid, semi-rapid, simmer. AEG's special burner design produces a clean and perfect flame - for total cooking flexibility and precise results.

RAPID BURNER Large 3kW burner for more heat, ideal to heat larger pans.

SEMI-RAPID BURNER Medium 2kW burners idea for everyday food cooking.

SIMMER BURNER Smaller 1kW burners to ensure perfect simmering or best coverage on smaller pans.

TRIPLE CROWN BURNER Three individual circles of flame incorporated into one 4kW burner for maximum heat. Perfect for wok cooking.

INDUCTION HOB

LED DISPLAY ON GAS HOB

TRIPLE CROWN BURNER

WIDTH OF HOB

NUMBER OF BURNERS

NUMBER OF COOKING ZONES

[1] Pan supports are removable and dishwasher proof.

**Refer to instruction manual prior to installation*

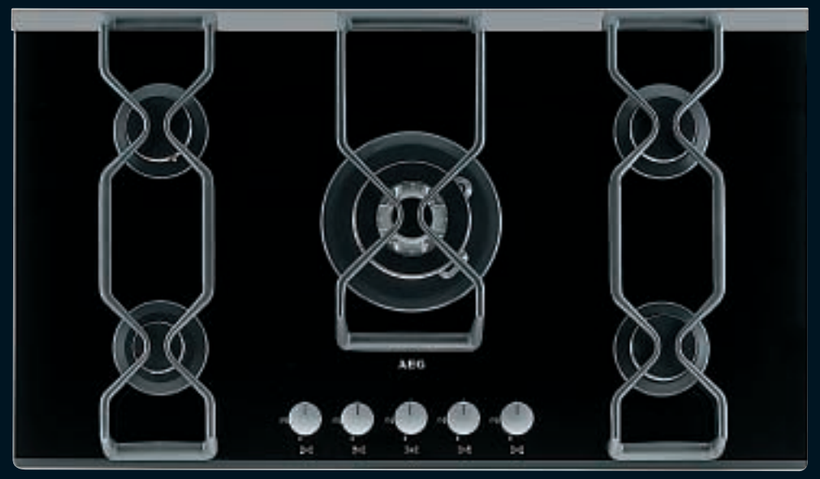

90cm Gas on Glass Hob with LED Display

COMPETENCE 99852G

90cm | 5

HOB FEATURES
3 CAST IRON PAN SUPPORTS
REMOVABLE WOK SUPPORT
LED DISPLAY
SAFETY GAS CUT OFF USING THERMOCOUPLES
AUTOMATIC INTEGRATED IGNITION
FRONT CONTROLS
HOB PERFORMANCE
5 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
1 TRIPLE CROWN 4KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED

STAINLESS STEEL REAR TRIM WITH BEVELLED FRONT EDGE 99852gm, ALUTEC® REAR TRIM WITH BEVELLED FRONT EDGE 99852ga

function on form

gas on glass

70cm Gas on Glass Hob with LED Display

COMPETENCE 79852G

70cm | 5

HOB FEATURES
3 CAST IRON PAN SUPPORTS
REMOVABLE WOK SUPPORT
LED DISPLAY
SAFETY GAS CUT OFF USING THERMOCOUPLES
AUTOMATIC INTEGRATED IGNITION
FRONT CONTROLS
HOB PERFORMANCE
5 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
1 TRIPLE CROWN 4KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED

STAINLESS STEEL REAR TRIM WITH BEVELLED FRONT EDGE 79852gm, ALUTEC® REAR TRIM WITH BEVELLED FRONT EDGE 79852ga

PERFEKT IN FORM UND FUNKTION

AEG

function on form
gas on glass

70cm Gas on Glass Hob

COMPETENCE 95752G

70cm | 5

HOB FEATURES
3 CAST IRON PAN SUPPORTS
SAFETY GAS CUT OFF USING THERMOCOUPLES
AUTOMATIC INTEGRATED IGNITION
FRONT CONTROLS
HOB PERFORMANCE
5 BURNERS:
1 RAPID 3KW BURNER
3 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED
STAINLESS STEEL FRAME 95752Gbm

60cm Gas on Glass Hob

COMPETENCE 69802G

60cm | 4

HOB FEATURES
2 CAST IRON PAN SUPPORTS
LED DISPLAY
SAFETY GAS CUT OFF USING THERMOCOUPLES
AUTOMATIC INTEGRATED IGNITION
SIDE CONTROLS
HOB PERFORMANCE
4 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED
STAINLESS STEEL REAR TRIM WITH BEVELLED FRONT EDGE 69802Gm ALUTEC® REAR TRIM WITH BEVELLED FRONT EDGE 69802Ga

super deluxe
gas hobs

90cm Gas Hob

COMPETENCE 34942G

90cm | 5

HOB FEATURES
3 CAST IRON PAN SUPPORTS
REMOVABLE WOK SUPPORT
AUTOMATIC INTEGRATED IGNITION
SIDE CONTROLS ON CAST IRON CONTROL PANEL
HOB PERFORMANCE
5 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
1 TRIPLE CROWN 4KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED
STAINLESS STEEL 34942Gm

70cm Gas Hob

COMPETENCE 35772G

70cm | 5

HOB FEATURES
3 CAST IRON PAN SUPPORTS
REMOVABLE WOK SUPPORT
AUTOMATIC INTEGRATED IGNITION
FRONT CONTROLS ON CAST IRON CONTROL PANEL
HOB PERFORMANCE
5 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
1 TRIPLE CROWN 4KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED
STAINLESS STEEL 35772Gm

AEG

deluxe
gas hobs

60cm Gas Hob

COMPETENCE 34602G

60cm | 4

HOB FEATURES
2 CAST IRON PAN SUPPORTS
AUTOMATIC INTEGRATED IGNITION
SIDE CONTROLS ON CAST IRON CONTROL PANEL
HOB PERFORMANCE
4 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED

STAINLESS STEEL 34602Gm
WHITE 34602Gw
BLACK 34602Gb

60cm Gas Hob

COMPETENCE 21602G

60cm | 4

HOB FEATURES
2 ENAMEL COATED PAN SUPPORTS
AUTOMATIC INTEGRATED IGNITION
SIDE CONTROLS
HOB PERFORMANCE
4 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED

STAINLESS STEEL 21602Gm
WHITE 21602Gw
DARK BROWN 21602Gd
BLACK 21602Gb

AEG induction hobs
faster and even more responsive than gas

60cm 4 Zone Induction Hob

COMPETENCE 68001KFN

60cm | 4

HOB FEATURES
TOUCH CONTROLS
4 BOOSTERS
STOP+GO WITH KEEP WARM SETTING
16 STAGE DIGITAL POWER LEVEL DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES
CHILD SAFETY LOCK
CONTROL LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
4 POT RECOGNITION INDICATORS
HOB PERFORMANCE
4 ZONES:
1 LARGE 2.2KW INDUCTION ZONE WITH 0.8KW BOOSTER
2 MEDIUM 1.8KW INDUCTION ZONES WITH 0.8KW BOOSTERS
1 SMALL 1.4KW INDUCTION ZONE WITH 0.8KW BOOSTER

BEVELLED EDGE 68001KFn

PERFEKT IN FORM UND FUNKTION

AEG

induction hob
with hilight zones

60cm 2 Zone Induction Hob with multi-purpose and HILIGHT zones

COMPETENCE 67600KFn

60cm | 4

HOB FEATURES
TOUCH CONTROLS
1 BOOSTER
9 STAGE DIGITAL POWER LEVEL DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES
CHILD SAFETY LOCK
CONTROL LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
2 POT RECOGNITION INDICATORS
HOB PERFORMANCE
4 ZONES:
1 LARGE 2.2KW INDUCTION ZONE
1 SMALL 1.4KW INDUCTION ZONE
1 MULTI-PURPOSE HILIGHT ZONE
1 SMALL HILIGHT ZONE
BEVELLED EDGE 67600KFn

ceramic hobs
with hilight zones

Unique Polygon Ceramic Hob with multi-purpose and triple zones

COMPETENCE 96901KFEn

103cm | 5

HOB FEATURES
TOUCH CONTROLS
AUTOMATIC BOOSTER
STOP+GO WITH KEEP WARM SETTING
9 STAGE DIGITAL POWER LEVEL DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES
CHILD SAFETY LOCK
CONTROL LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
5 ZONES:
3 SINGLE HILIGHT ZONES IN 2 SIZES
1 CENTRAL TRIPLE HILIGHT ZONE
1 MULTI-PURPOSE HILIGHT ZONE
BEVELLED EDGE 96901KFEn

77cm Ceramic Hob with multi-purpose and HILIGHT zones

COMPETENCE 76301KFn

77cm | 4

HOB FEATURES
TOUCH CONTROLS
AUTOMATIC BOOSTER
STOP+GO WITH KEEP WARM SETTING
15 STAGE DIGITAL POWER LEVEL DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
4 ZONES:
2 SINGLE HILIGHT ZONES
1 TRIPLE HILIGHT ZONE
1 MULTI-PURPOSE HILIGHT ZONE
BEVELLED EDGE 76301KFn

72cm hob with left and right touch controls

COMPETENCE 79301KFn

72cm | 4

HOB FEATURES
TOUCH CONTROLS
AUTOMATIC BOOSTER
STOP+GO WITH KEEP WARM SETTING
15 STAGE DIGITAL POWER LEVEL DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
4 ZONES:
2 SINGLE HILIGHT ZONES IN 2 SIZES
1 TRIPLE HILIGHT ZONE
1 MULTI-PURPOSE HILIGHT ZONE
BEVELLED EDGE 79301KFn

AEG

ceramic hobs
with hilight zones

60cm Ceramic Hob
with multi-purpose and
HILIGHT zones

COMPETENCE 66300KFAN

60cm | 4

HOB FEATURES
TOUCH CONTROLS
AUTOMATIC BOOSTER
STOP+GO WITH KEEP WARM SETTING
15 STAGE DIGITAL POWER DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
4 ZONES:
2 SINGLE HILIGHT ZONES
1 TRIPLE HILIGHT ZONE
1 MULTI-PURPOSE HILIGHT ZONE
BEVELLED EDGE & ALUTEC® TRIM 66300KFan

60cm Ceramic Hob
with double and triple
HILIGHT zones

COMPETENCE 66201KFN

60cm | 4

HOB FEATURES
TOUCH CONTROLS
AUTOMATIC BOOSTER
STOP+GO WITH KEEP WARM SETTING
15 STAGE DIGITAL POWER DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
4 ZONES:
2 SINGLE HILIGHT ZONES
1 TRIPLE HILIGHT ZONE
1 DUAL HILIGHT ZONE
BEVELLED EDGE 66201KFn

60cm Ceramic Hob
with simple touch controls

COMPETENCE 6410KFN

60cm | 4

HOB FEATURES
TOUCH CONTROLS
7 STAGE DIGITAL POWER DISPLAYS
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
4 ZONES:
3 SINGLE HILIGHT ZONES
1 DUAL HILIGHT ZONE
BEVELLED EDGE 6410KFn

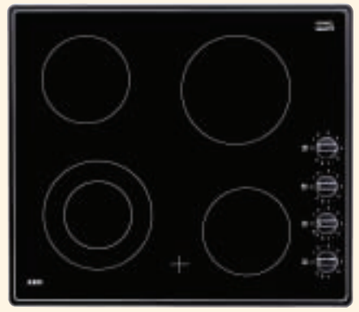

60cm Ceramic Hob
with side controls

COMPETENCE C6010K

60cm | 4

HOB FEATURES
ROTARY SIDE CONTROLS
10 STAGE VARIABLE POWER LEVEL
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
4 ZONES:
3 SINGLE HILIGHT ZONES IN 2 SIZES
1 DUAL HILIGHT ZONE
NEUTRAL BLACK FRAME C6010Kbn, STAINLESS STEEL FRAME C6010Kmn

sealed plate hob

60cm Sealed Plate Hob

COMPETENCE 111K

60cm | 4

HOB FEATURES
60CM SEALED PLATE HOB WITH SIDE CONTROLS
ROTARY SIDE CONTROLS
4 'RED DOT' FAST PLATES
RECESSED SPILLAGE WELL
HOB-ON WARNING
STAINLESS STEEL 111Km, White 111Kw, DARK BROWN 111Kd

AEG

Front-Line classic in Stainless Steel

A flexible modular cooking system which allows you to customise your kitchen to your individual needs for cooking perfection.

Front-Line Classic
60cm gas on glass hob

COMPETENCE 6562G

60cm | 4

HOB FEATURES
- 2 CAST IRON PAN SUPPORTS
- SAFETY GAS CUT OFF USING THERMOCOUPLES
- AUTOMATIC INTEGRATED IGNITION
- EASY TO REACH FRONT CONTROLS

HOB PERFORMANCE
- 4 BURNERS:
- 1 RAPID 3KW BURNER
- 2 SEMI RAPID 1.9KW BURNERS
- 1 SIMMER 1KW BURNER
- LPG (BOTTLED GAS) CONVERSION KIT OPTIONAL

STAINLESS STEEL C6562GM
(replaces C6561GM)

Front-Line Classic
30cm gas on glass hob

COMPETENCE 6531DG

30cm | 2

HOB FEATURES
- 1 CAST IRON PAN SUPPORT
- SAFETY GAS CUT OFF USING THERMOCOUPLES
- AUTOMATIC INTEGRATED IGNITION
- EASY TO REACH FRONT CONTROLS

HOB PERFORMANCE
- 2 BURNERS:
- 1 RAPID 3KW BURNER
- 1 SEMI RAPID 1.9KW BURNER
- LPG (BOTTLED GAS) CONVERSION KIT OPTIONAL

STAINLESS STEEL C6531DGM
(replaces C6530DGM)

Front-Line Classic 30cm
stainless steel wok burner

COMPETENCE 3531WK

30cm | 1

HOB FEATURES
- 1 CAST IRON WOK PAN SUPPORT
- SAFETY GAS CUT OFF USING THERMOCOUPLE
- AUTOMATIC INTEGRATED IGNITION
- EASY TO REACH FRONT CONTROL

HOB PERFORMANCE
- 1 BURNER:
- 1 TRIPLE CROWN 4KW BURNER

STAINLESS STEEL C3531WKM
(replaces C353WKM)

Front-Line Classic 14.5cm
down draught extractor

COMPETENCE 115DD

14.5cm | 370m³/h

FEATURES
- REMOVES GREASE AND ODOURS DIRECTLY FROM THE COOKING AREA
- EASY TO REACH FRONT CONTROLS
- FULLY RETRACTS TO WORKTOP LEVEL WHEN NOT IN USE
- 2 HEIGHTS OF OPERATION
- 2 SPEEDS OF OPERATION
- 3 AIR INLET OPTIONS
- ALUMINIUM GREASE FILTER IS DISHWASHER SAFE

STAINLESS STEEL C115DDM

Front-Line Classic
60cm ceramic hob

COMPETENCE 6310K

60cm | 4

HOB FEATURES
- ROTARY CONTROLS
- AUTOMATIC BOOSTER
- CHILD SAFETY SWITCH OFF
- AUTO SAFETY SWITCH OFF
- RESIDUAL HEAT INDICATORS

HOB PERFORMANCE
- 4 ZONES:
- 2 SINGLE HILIGHT ZONES, 1 EXTRA LARGE
- 1 DUAL HILIGHT ZONE

STAINLESS STEEL C6310KM

Front-Line Classic
30cm ceramic hob

COMPETENCE 6310DK

30cm | 2

HOB FEATURES
- ROTARY CONTROLS
- AUTOMATIC BOOSTER
- CHILD SAFETY SWITCH OFF
- AUTO SAFETY SWITCH OFF
- RESIDUAL HEAT INDICATORS

HOB PERFORMANCE
- 2 ZONES:
- 1 SINGLE HILIGHT ZONE
- 1 DUAL HILIGHT ZONE

STAINLESS STEEL C6310DKM

Front-Line Classic
30cm ceramic grill

COMPETENCE 231GR

30cm | 1

HOB FEATURES
- ROTARY CONTROL

HOB PERFORMANCE
- 1 ZONE:
- 1.5KW HEATING ZONE PERFECT FOR GRILLING LEAN MEAT FISH AND VEGETABLES. ALSO SUITABLE FOR OVAL COOKING DISHES

STAINLESS STEEL C231GRM

Front-Line Classic
30cm combi grill/fryer

COMPETENCE 130FG

30cm | 2

HOB FEATURES
- ROTARY CONTROLS
- REMOVABLE GRILL AND LAVA STONES FOR FRYING OPTION
- BUILT-IN DRAINAGE TAP FOR CONVENIENCE AND EASE OF USE
- LAVA STONES AND TRAY ARE DISHWASHABLE FOR EASY CLEANING
- TEMPERATURE INDICATOR LED

HOB PERFORMANCE
- 2 ZONES:
- TEMPERATURE CONTROLLED GRIDDLE WITH 2KW HEATING ELEMENT
- 3.5 LITRES DEEP FAT FRYER WITH LID

STAINLESS STEEL C130FGM

Stainless steel heat guard and rotary controls are fully removable for easy cleaning.

Can be fitted with other Front-Line Classic units to create your own kitchen centrepiece.

AEG

Front-Line future with Alutec®

A flexible modular cooking system which allows you to customise your kitchen to your individual needs for cooking perfection.

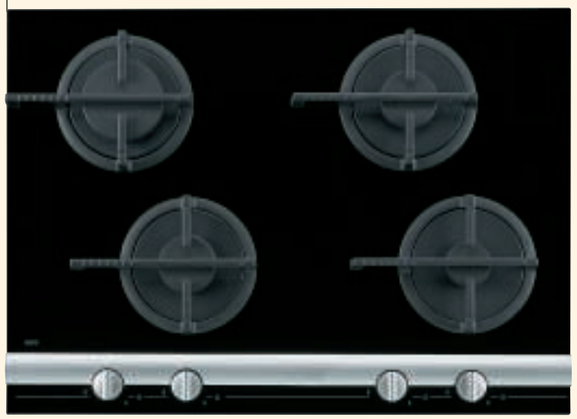

Front-Line Future
72cm gas on glass hob with wide surface area for more space between cooking zones

FRONT-LINE FM7300G

72cm | 4

HOB FEATURES
4 INDIVIDUALLY STYLED CAST IRON PAN SUPPORTS
SAFETY GAS CUT OFF USING THERMOCOUPLES
AUTOMATIC INTEGRATED IGNITION
EASY TO REACH FRONT CONTROLS
HOB PERFORMANCE
4 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED
ALUTEC® FM7300GAN

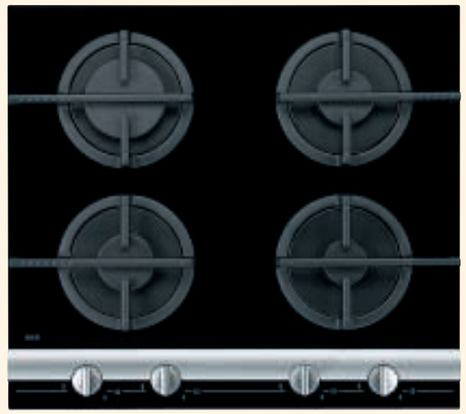

Front-Line Future
60cm gas on glass hob

FRONT-LINE FM6300G

60cm | 4

HOB FEATURES
4 INDIVIDUALLY STYLED CAST IRON PAN SUPPORTS
SAFETY GAS CUT OFF USING THERMOCOUPLES
AUTOMATIC INTEGRATED IGNITION
EASY TO REACH FRONT CONTROLS
HOB PERFORMANCE
4 BURNERS:
1 RAPID 3KW BURNER
2 SEMI RAPID 2KW BURNERS
1 SIMMER 1KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED
ALUTEC® FM6300GAN

AluTec® strip is fully removable for easy cleaning.

Front-Line future with Alutec®

Mix and match your choice of gas, ceramic or induction hobs, then complete your kitchen with a grill or a worktop down-draught, a stylish cooker hood or microwave lift door.

reddot design award
winner 2003

Front-Line Future
36cm gas on glass hob

FRONT-LINE FM4300G

36cm | 2

HOB FEATURES
2 INDIVIDUALLY STYLED CAST IRON PAN SUPPORTS
SAFETY GAS CUT OFF USING THERMOCOUPLES
AUTOMATIC INTEGRATED IGNITION
EASY TO REACH FRONT CONTROLS
HOB PERFORMANCE
2 BURNERS:
1 RAPID 3KW BURNER
1 SEMI RAPID 2KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED
ALUTEC® FM4300GAN

Front-Line Future
36cm gas on glass wok burner

FRONT-LINE FM4360G

36cm | 1

HOB FEATURES
CAST IRON WOK SUPPORT FOR FLAT OR CURVED BASE WOK PANS
SAFETY GAS CUT OFF USING THERMOCOUPLE
AUTOMATIC INTEGRATED IGNITION
EASY TO REACH FRONT CONTROL
HOB PERFORMANCE
1 BURNER:
1 TRIPLE CROWN 4KW BURNER
LPG (BOTTLED GAS) CONVERSION KIT INCLUDED
ALUTEC® FM4360GAN

Can be fitted with other Front-Line Future units to create your own kitchen centrepiece.
See page 47 for matching island and chimney wall cooker hoods.

AEG

Front-Line future with Alutec®
induction hobs

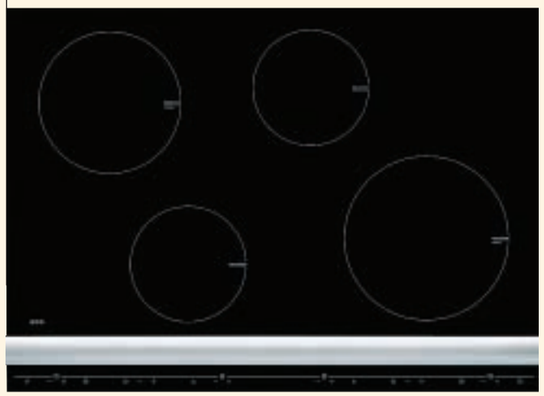

Front-Line Future
72cm induction hob with wide surface area
for more space between cooking zones

FM7803K

72cm | 4

HOB FEATURES
TOUCH CONTROLS
2 POWERFUL BOOSTERS
9 STAGE DIGITAL POWER LEVEL DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES, MINUTE MINDER
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATOR
4 POT RECOGNITION INDICATORS
HOB PERFORMANCE
4 ZONES:
1 LARGE 2.2KW INDUCTION ZONE WITH 0.8KW BOOSTER
1 MEDIUM 1.8KW INDUCTION ZONE WITH 0.8KW BOOSTER
2 SMALL 1.4KW INDUCTION ZONES
ALUTEC® FM7803KAN

Front-Line Future
36cm induction hob

FM4803K

36cm | 2

HOB FEATURES
TOUCH CONTROLS
1 POWERFUL BOOSTER
9 STAGE DIGITAL POWER LEVEL DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES, MINUTE MINDER
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATOR
2 POT RECOGNITION INDICATORS
HOB PERFORMANCE
2 ZONES:
1 LARGE 2.2KW INDUCTION ZONE WITH 0.8KW BOOSTER
1 SMALL 1.4KW INDUCTION ZONE
ALUTEC® FM4803KAN

AluTec® strip is fully removable for easy cleaning.

Front-Line future with Alutec®
ceramic hobs

Front-Line Future
72cm ceramic hob with wide surface area
for more space between cooking zones

FM7531K

72cm | 4

HOB FEATURES
TOUCH CONTROLS
AUTOMAX
9 STAGE DIGITAL POWER DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES, MINUTE MINDER
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
4 POT RECOGNITION INDICATORS
HOB PERFORMANCE
4 ZONES:
1 SINGLE HILIGHT ZONE
1 TRIPLE HILIGHT ZONE
2 DUAL HILIGHT ZONES
ALUTEC® FM7531KAN

Front-Line Future
60cm ceramic hob

FM6520

60cm | 4

HOB FEATURES
TOUCH CONTROLS
9 STAGE DIGITAL POWER DISPLAYS
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
4 ZONES:
2 SINGLE HILIGHT ZONES
2 DUAL HILIGHT ZONES, 1 EXTRA LARGE
ALUTEC® FM6520KAN

Can be fitted with other Front-Line Future units to create your own kitchen centrepiece.
See page 47 for matching island and chimney wall cooker hoods.

Front-Line future ceramic hobs

Flexible modular cooking systems for cooking perfection

Front-Line Future
36cm ceramic hob

FM4513K

36cm | 2

HOB FEATURES
TOUCH CONTROLS
AUTOMAX
9 STAGE DIGITAL POWER DISPLAYS
PROGRAMMABLE TIMER PER ZONE; UP TO 99 MINUTES, MINUTE MINDER
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATORS
HOB PERFORMANCE
2 ZONES:
1 SINGLE HILIGHT ZONE
1 DUAL HILIGHT ZONE
ALUTEC® FM4513KAN

Front-Line Future
36cm barbecue grill with lava stones

FM4500GR

36cm | 1

FEATURES
TOUCH CONTROLS
AUTOMAX
LAVA STONES AND TRAY ARE DISHWASHABLE FOR EASY CLEANING
9 STAGE DIGITAL POWER DISPLAYS
MINUTE MINDER
CHILD SAFETY LOCK
AUTO SAFETY SWITCH OFF
RESIDUAL HEAT INDICATOR
HOB PERFORMANCE
1 ZONE:
TEMPERATURE CONTROLLED GRIDDLE WITH INTEGRAL 2.3KW POWERFUL HEATING ELEMENT FOR FAST HEAT UP TIME
ALUTEC® FM4500GRA

AluTec® strip is fully removable for easy cleaning.

FRONT-LINE FUTURE DOWN DRAUGHT EXTRACTOR

Front-Line Future
18cm down draught for worktop extraction

FM2500DD

18cm | 480m³ | 65dB(A)

FEATURES
REMOVES GREASE AND ODOURS DIRECTLY FROM THE COOKING AREA
FULLY RETRACTS TO WORKTOP LEVEL WHEN NOT IN USE
TOUCH CONTROLS
2 HEIGHTS OF OPERATION
3 AIR INLET OPTIONS
EXTRACTION AND RECIRCULATION
DELAYED SWITCH-OFF TIMER AND AUTO SAFETY SWITCH-OFF
WASHABLE ALUMINIUM GREASE FILTER
CHARCOAL FILTER AS OPTION - KF25
ALUTEC® FM2500DDA

FRONT-LINE FUTURE MICROWAVE LIFT DOOR

Front-Line Future
60cm microwave lift door

FM6000LD

w:60cm h:46cm

FEATURES
GLASS DOOR WITH ALUTEC® HANDLE
LIFT DOOR MECHANISM
IDEAL TO CONCEAL YOUR MICROWAVE OR A PORTABLE TV
PERFECTLY MATCHES THE FRONT-LINE FUTURE RANGE OF HOBS AND HOODS
ALUTEC® FM6000LDA

Can be fitted with other Front-Line Future units to create your own kitchen centrepiece.

See page 47 for matching island and chimney wall cooker hoods.

AEG

hoods

reddot design award
winner 2003

AEG's Cobra Hood design statement was 'reddot' design award winner 2003.

FORM
PURE DESIGN STATEMENT

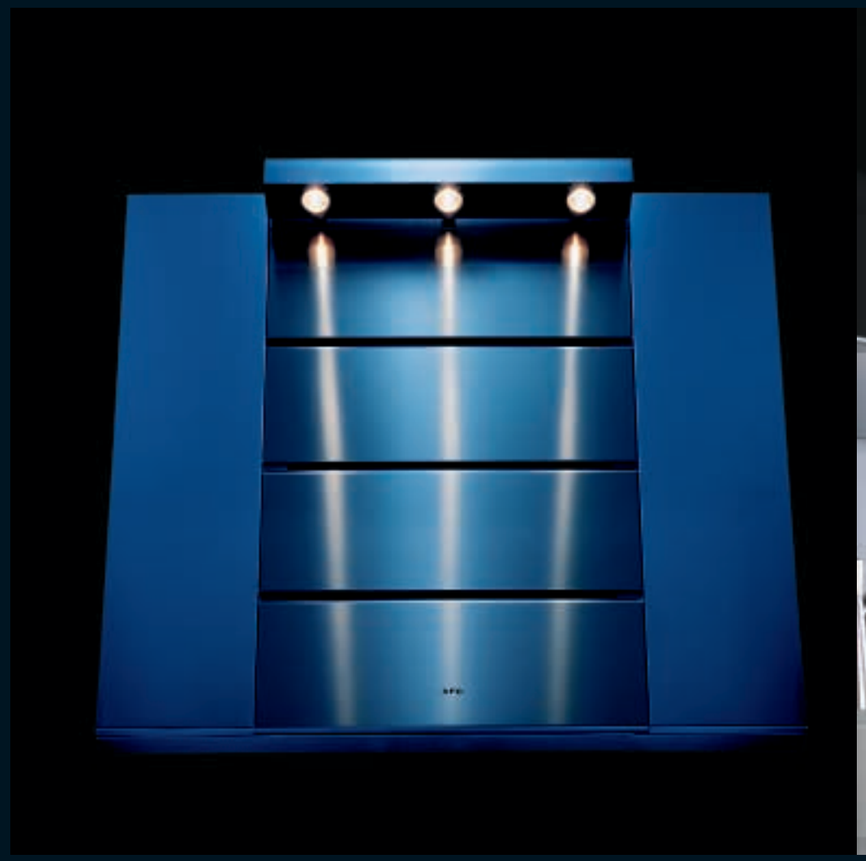

AEG's range of hoods complement any kitchen, regardless of size and style. From unique designer hoods to stylish chimney hoods and island hoods, each is designed to co-ordinate with your AEG oven and hob.

function
whisper-quiet operation

With whisper-quiet operation, as low as 55dB on some models, AEG's cooker hoods clear your kitchen of cooking vapours efficiently without making a noise about it.

With a variety of sizes and the choice of extraction or recirculation mode, AEG has a range of hoods suitable for all kitchen and cooking needs.

Hood Functions

Hood Width

The AEG Hood Range has a selection to suit all tastes, with a range of sizes to fit all requirements.

Extraction Rates

The level at which the cooker hood clears cooking vapours from the kitchen environment. AEG cooker hoods are measured in cubic metres per hour and are in accordance with IEC standards.

Low Noise Rating

A higher extraction without a loud noise, creating a more peaceful kitchen environment.

ELECTRONIC VARIABLE SPEED CONTROL Electronic precision to control the rate of extraction which can be varied to suit different types of cooking, providing optimum efficiency at minimal cost.

VARIABLE SPEED CONTROL The rate of extraction can be varied to suit different types of cooking, providing optimum efficiency at minimal cost.

SLIDER CONTROLS An easy to use slider control to operate speed levels and hood lights.

ELECTRONIC TOUCH CONTROLS Stylish, simple and precise settings.

PUSH BUTTON CONTROL For one-touch ease of use.

ELECTRONIC CONTROL BALL Controls the speed of the extraction, lights and indicates the saturation of the filters.

LED DISPLAY Indicates extraction speed and when the charcoal filter or metal grease filter needs changing or cleaning.

AUTOMATIC SENSOR CONTROL A combination of 3 sensors are used to regulate the intensity of the extraction. These sensors are hob heat, ambient temperature and humidity.

ELECTRONIC TIMER/TIMED SETTING Pre-set timers are incorporated into the hood so that it switches off at a programmed time.

REMOTE CONTROL Easy to use remote control for the hood.

HALOGEN LIGHTS This type of illumination on the hood provides perfect cooking visibility and can be used to create softer lighting in the kitchen.

HOB LIGHTS This type of illumination on the hood provides good cooking visibility and can be used to create softer lighting in the kitchen.

EXTENDED VAPOUR GUIDE Pull out extension on integrated hoods for attachment of a furniture panel.

EXTRACTION MODE A ducting kit is attached to the hood to extract the cooking fumes externally, giving a pleasant kitchen environment, which is free from cooking odours.

RECIRCULATION MODE The hood draws in the cooking fumes, filters the air through the charcoal filter and then recirculates the clean air back into the kitchen, leaving it free from cooking odours. For those hoods that do not come with a charcoal filter, it is available as an accessory.

FILTERS

METAL GREASE FILTERS The metal filter attracts the grease from the cooking vapours that are extracted, reducing odours, purifying the air and optimising performance. The filter is washable and never needs replacing.

ACRYLIC GREASE FILTER WITH SATURATION INDICATOR The filter absorbs grease from the cooking vapour extracted, producing cleaner air and reducing odours. Diagonal lines appera when the filter needs changing. This efficient and simple measure maintain perfect hood performance and extend the hood's life.

CHARCOAL FILTER This charcoal filter is used in recirculation mode to remove cooking smells. Needs replacing periodically.

LONG LIFE CHARCOAL FILTER This charcoal filter is used in recirculation mode to remove cooking smells. It may be washed in the dishwasher and dried in the oven.

HOOD TYPES

DESIGNER HOOD For those whose initial requirement is design, with the reassurance that AEG Hoods are perfect in both Form and Function.

CHIMNEY HOOD An attractive feature in the kitchen, the chimney hood is fitted & fixed between furniture or for wall mounting.

CANOPY HOOD The hood is not visible and can be used with a variety of kitchen furniture for total flexibility. It can be fitted & fixed into an island chimney, corner unit or wall cupboard.

TELESCOPIC HOOD Fitted & fixed into a 60cm wide furniture unit, with a shallow front cupboard. When in use it extends out-wards beyond the cabinet and inwards for a flush finish when not in use.

ISLAND HOOD Suspended from the ceiling over a cooking station, the hood becomes the focal point of the kitchen. It can be used with an island unit.

INTEGRATED HOOD Fitted & fixed between wall units. Hidden by a furniture door, the hood is not visible, enhancing the appearance of the kitchen.

STANDARD HOOD Easy to install, it can be fitted underneath a 60cm wide wall cupboard. The controls are easy to reach at the front of the hood.

Unique design gives optimum use of cooking space and perfect extraction

COMPETENCE HD8795m

540m³/h | 59dB(A) | 90cm

HOOD FEATURES & FUNCTIONS

- VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
- ELECTRONIC BALL CONTROL WITH COLOUR DISPLAY FOR SPEED, FILTER AND LIGHT SETTINGS
- 3 X HALOGEN LIGHTS WITH ELECTRONIC DIMMER CONTROL FOR SOFTER LIGHTING
- FOR WALL MOUNTING BELOW FURNITURE, BETWEEN FURNITURE OR AS A STAND ALONE UNIT

FILTERS

- WASHABLE METAL GREASE FILTER
- WASHABLE LONGLIFE CHARCOAL FILTER (KF14)
- ELECTRONIC SATURATION INDICATORS

STAINLESS STEEL ALUTEC® SIDE PANELS (OPTIONAL EXTRA BD8004a). CHIMNEY SECTION AVAILABLE AS AN OPTIONAL EXTRA K8004m.

High performance

stainless steel designer cooker hoods

Unique design gives optimum use of cooking space and perfect extraction

COMPETENCE HD8760m

540m³/h | 59dB(A) | 60cm

HOOD FEATURES & FUNCTIONS

- VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
- ELECTRONIC BALL CONTROL WITH COLOUR DISPLAY FOR SPEED, FILTER AND LIGHT SETTINGS
- 3 X HALOGEN LIGHTS WITH ELECTRONIC DIMMER CONTROL FOR SOFTER LIGHTING
- FOR WALL MOUNTING BELOW FURNITURE, BETWEEN FURNITURE OR AS A STAND ALONE UNIT

FILTERS

- WASHABLE METAL GREASE FILTER
- WASHABLE LONGLIFE CHARCOAL FILTER (KF14)
- ELECTRONIC SATURATION INDICATORS

STAINLESS STEEL CHIMNEY SECTION AVAILABLE AS AN OPTIONAL EXTRA K8004m.

PERFEKT IN FORM UND FUNKTION

AEG

100cm Glass Canopy Island Hood

COMPETENCE Hi8610m

HOOD FEATURES & FUNCTIONS
VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
ELECTRONIC CONTROL WITH LED DISPLAYS
DELAYED SWITCH OFF TIMER AND AUTO SAFETY SWITCH OFF
4 x HALOGEN LIGHTS
FOR ISLAND INSTALLATION
ELECTRONIC SATURATION INDICATORS
EXTRACTION & RECIRCULATION
FILTERS
WASHABLE STAINLESS STEEL GREASE FILTER CASSETTE
CHARCOAL FILTER AS OPTION - KF20
STAINLESS STEEL

500m³/h

59dB(A)

100cm

90cm and 60cm Chimney Hood with Electronic Touch Controls, Automatic Sensor and Digital Displays

COMPETENCE HD8990d

HOOD FEATURES & FUNCTIONS
VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
AUTOMATIC SENSOR PROGRAMME
ELECTRONIC TOUCH CONTROLS WITH LED DISPLAY
DELAYED SWITCH OFF TIMER AND AUTO SAFETY SWITCH OFF
2 x HALOGEN LIGHTS
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
ELECTRONIC SATURATION INDICATOR
EXTRACTION & RECIRCULATION
FILTERS
2 WASHABLE METAL GREASE FILTER CASSETTES
CHARCOAL FILTER AS OPTION - KF20
STAINLESS STEEL HD8990m ALU-DESIGN HD8990ad

570m³/h

59dB(A)

90cm

COMPETENCE HD8960ad

AS HD8990, WITH 60cm WIDTH STAINLESS STEEL HD8960m ALU-DESIGN HD8960ad

60cm

90cm Glass Canopy Chimney Hood

COMPETENCE C2020Dm

HOOD FEATURES & FUNCTIONS
VARIABLE 3 SPEED PUSH BUTTON CONTROL
2 x HALOGEN LIGHTS
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
EXTRACTION & RECIRCULATION
FILTERS
WASHABLE METAL GREASE FILTER CASSETTE
CHARCOAL FILTER EFF71
STAINLESS STEEL

550m³/h

60dB(A)

90cm

60cm Stainless Steel Hood with Glass Canopy

COMPETENCE HD6470m

HOOD FEATURES & FUNCTIONS
ELECTRONIC VARIABLE 3 SPEED PUSH BUTTON CONTROL
2 x HALOGEN LIGHTS
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
EXTRACTION & RECIRCULATION
EXTENDABLE TO 70cm OR 80cm USING STAINLESS STEEL SIDE TRIMS
FILTERS
WASHABLE STAINLESS STEEL GREASE FILTER
CHARCOAL FILTER AS OPTION - KF20
STAINLESS STEEL

470m³/h

64dB(A)

60cm

90cm Stylish AluTec® and Stainless Steel, High Performance Chimney Hood with Remote Control

COMPETENCE HD8694m

HOOD FEATURES & FUNCTIONS
VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
ELECTRONIC CONTROL WITH LED DISPLAY
REMOTE CONTROL
DELAYED SWITCH OFF TIMER AND AUTO SAFETY SWITCH OFF
2 x HALOGEN LIGHTS
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
ELECTRONIC SATURATION INDICATORS
EXTRACTION & RECIRCULATION
FILTERS
2 WASHABLE METAL GREASE FILTER CASSETTES
CHARCOAL FILTER TYPE 160
STAINLESS STEEL WITH ALUTEC® TRIM

750m³/h

69dB(A)

90cm

90cm Stylish Glass Canopy Chimney Hood

COMPETENCE C2060Dm

HOOD FEATURES & FUNCTIONS
VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
ELECTRONIC CONTROL WITH LED DISPLAY
DELAYED SWITCH OFF TIMER AND AUTO SAFETY SWITCH OFF
4 x HALOGEN LIGHTS
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
ELECTRONIC SATURATION INDICATORS
EXTRACTION & RECIRCULATION
FILTERS
2 WASHABLE METAL GREASE FILTER CASSETTES
CHARCOAL FILTER AS OPTION - LONGLIFE
STAINLESS STEEL

520m³/h

55dB(A)

90cm

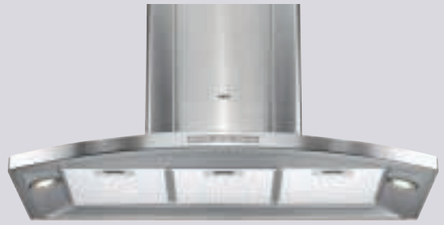

90cm Chimney Hood

COMPETENCE HC5690m

HOOD FEATURES & FUNCTIONS
ELECTRONIC VARIABLE 4 SPEED PUSH BUTTON ILLUMINATED CONTROL INCLUDING INTENSIVE SETTING
DELAYED SWITCH OFF TIMER ON INTENSIVE SETTING
2 x HALOGEN LIGHTS
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
ELECTRONIC SATURATION INDICATORS
EXTRACTION & RECIRCULATION
FILTERS
3 WASHABLE METAL GREASE FILTER CASSETTES
CHARCOAL FILTER AS OPTION - LONGLIFE
STAINLESS STEEL

650m³/h

62dB(A)

90cm

60cm Chimney Hood

COMPETENCE HC3360m

HOOD FEATURES & FUNCTIONS
VARIABLE 3 SPEED PUSH BUTTON CONTROL
2 x HALOGEN LIGHTS
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
EXTRACTION & RECIRCULATION
FILTERS
2 WASHABLE METAL GREASE FILTER CASSETTES
CHARCOAL FILTER AS OPTION - LONGLIFE
STAINLESS STEEL

370m³/h

60dB(A)

60cm

AEG

100cm Professional Chimney Hood

COMPETENCE CHDD8510m

HOOD FEATURES & FUNCTIONS
4 SPEED PUSH BUTTON CONTROL
ELECTRONIC VARIABLE 4 SPEED CONTROL
2 HALOGEN LIGHTS
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
EXTRACTION & RECIRCULATION
FILTERS
WASHABLE METAL GREASE FILTER CASSETTES
CHARCOAL FILTER INCLUDED KF20
STAINLESS STEEL

790m³/h · 69dB(A) · 100cm

COMPETENCE CHDD8509m

AS CHDD8510m, WITH 90cm WIDTH STAINLESS STEEL

90cm

60cm Glass Telescopic Hood

CH695Tx

HOOD FEATURES & FUNCTIONS
VARIABLE SPEED CONTROL INCLUDING INTENSIVE SETTING AUTOMATIC OPERATION VIA PULL-OUT TELESCOPIC VISOR
2 x HALOGEN LIGHTS
FOR INSTALLATION BETWEEN 60cm WIDE FURNITURE WITH SHALLOW FRONT CUPBOARD
EXTRACTION & RECIRCULATION
FILTERS
WASHABLE METAL GREASE FILTER CASSETTE
CHARCOAL FILTER INCLUDED
STAINLESS STEEL

600m³/h · 55dB(A) · 60cm

120cm Front-Line Future AluTec® Island Hood

COMPETENCE Hi8820A

HOOD FEATURES & FUNCTIONS
VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
2 HALOGEN LIGHTS
TOUCH CONTROLS WITH LED DISPLAY
DELAYED SWITCH OFF TIMER AND AUTO SAFETY SWITCH OFF
FOR ISLAND INSTALLATION
EXTRACTION & RECIRCULATION
FILTERS
3 WASHABLE ALUMINIUM DISHWASHER SAFE GREASE FILTER CASSETTES
CHARCOAL FILTER INCLUDED KF20
ALUTEC®

570m³/h · 63dB(A) · 120cm

90cm Front-Line Future AluTec® Chimney Hood

COMPETENCE HD8890A

HOOD FEATURES & FUNCTIONS
VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
2 HALOGEN LIGHTS
TOUCH CONTROLS WITH LED DISPLAY
DELAYED SWITCH OFF TIMER AND AUTO SAFETY SWITCH OFF
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
EXTRACTION & RECIRCULATION
FILTERS
2 WASHABLE ALUMINIUM DISHWASHER SAFE GREASE FILTER CASSETTES
CHARCOAL FILTER INCLUDED KF20
ALUTEC®

570m³/h · 63dB(A) · 90cm

60/90cm Chimney Hoods

CH600k/CH900k

HOOD FEATURES & FUNCTIONS
VARIABLE 3 SPEED PUSH BUTTON CONTROL
2 x 40W LIGHTS
EXTRACTION & RECIRCULATION
FILTERS
WASHABLE METAL GREASE FILTER
CHARCOAL FILTER INCLUDED
BLACK 60cm CH600K BLACK 90cm CH900K

430m³/h · 62dB(A) · 60/90cm

70cm Stainless Steel Chimney Hood with Curved Aluminum Trim

CH700x

HOOD FEATURES & FUNCTIONS
ELECTRONIC VARIABLE 3 SPEED PUSH BUTTON CONTROL
2 HALOGEN LIGHTS
EXTRACTION & RECIRCULATION
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
FILTERS
2 WASHABLE METAL GREASE FILTER CASSETTES
CHARCOAL FILTER INCLUDED TYPE 160
STAINLESS STEEL WITH ALUTEC® TRIM

420m³/h · 64dB(A) · 70cm

120cm Front-Line Future AluTec® Chimney Hood

COMPETENCE HD8820A

HOOD FEATURES & FUNCTIONS
VARIABLE 4 SPEED CONTROL INCLUDING 1 INTENSIVE SETTING
4 HALOGEN LIGHTS
TOUCH CONTROLS WITH LED DISPLAY
DELAYED SWITCH OFF TIMER AND AUTO SAFETY SWITCH OFF
FOR WALL MOUNTING OR INSTALLATION BETWEEN FURNITURE
EXTRACTION & RECIRCULATION
FILTERS
3 WASHABLE ALUMINIUM DISHWASHER SAFE GREASE FILTER CASSETTES
CHARCOAL FILTER INCLUDED KF20
ALUTEC®

570m³/h · 63dB(A) · 120cm

Stylish stainless steel splashbacks to complement stainless steel hobs and hoods

EFB60, EFB90 & EFB120

SPLASHBACK FEATURES & FUNCTIONS
AVAILABLE IN 60cm, 90cm & 120cm WIDTHS, 69cm HIGH
EASY TO WIPE CLEAN, WITH RIGID REINFORCED BACK

Stylish AluTec® splashbacks to complement AluTec® range of ovens, hobs and hoods

SK3060-a & SK3090-a

SPLASHBACK FEATURES & FUNCTIONS
AVAILABLE IN 60cm & 90cm WIDTHS, 75cm HIGH
EASY TO WIPE CLEAN, WITH RIGID REINFORCED BACK

AEG

60cm Standard Hood

COMPETENCE HU3360

HOOD FEATURES & FUNCTIONS
VARIABLE 3 SPEED PUSH BUTTON CONTROL
2 x 40W LIGHTS
FOR INSTALLATION BENEATH 60cm WIDE WALL CUPBOARDS
EXTRACTION & RECIRCULATION
FILTERS
ACRYLIC GREASE FILTER
CHARCOAL FILTER AS OPTION - KF10
WHITE HU3360w DARK BROWN HU3360d (SHOWN ABOVE)

225m³/h
62dB(A)
60cm

60cm Standard Hood

COMPETENCE HU4360m

HOOD FEATURES & FUNCTIONS
VARIABLE 3 SPEED PUSH BUTTON CONTROL
2 x 40W LIGHTS
FOR INSTALLATION BENEATH 60cm WIDE WALL CUPBOARDS
EXTRACTION & RECIRCULATION
FILTERS
2 x WASHABLE METAL GREASE FILTER CASSETTES
CHARCOAL FILTER AS OPTION - KF10
STAINLESS STEEL

225m³/h
62dB(A)
60cm

52cm Canopy Hood

COMPETENCE C502Dml

HOOD FEATURES & FUNCTIONS
VARIABLE 3 SPEED SLIDER CONTROL
40W LIGHT
FOR INSTALLATION INTO AN ISLAND CHIMNEY, WALL OR CORNER UNIT
EXTRACTION & RECIRCULATION
FILTERS
ACRYLIC GREASE FILTER
CHARCOAL FILTER AS OPTION - CAKFPLUS
SILVER

210m³/h
66dB(A)
52cm

55cm Canopy Hood

COMPETENCE HL4150ml

HOOD FEATURES & FUNCTIONS
VARIABLE 3 SPEED SLIDER CONTROL
2x40W LIGHTS
FOR INSTALLATION INTO AN ISLAND CHIMNEY OR WALL UNIT
EXTRACTION & RECIRCULATION
FILTERS
WASHABLE METAL GREASE FILTER CASSETTE
CHARCOAL FILTER AS OPTION - LONGLIFE
SILVER

285m³/h
65dB(A)
55cm

60cm Integrated Hood

COMPETENCE HE3160ml

HOOD FEATURES & FUNCTIONS
VARIABLE 3 SLIDER SPEED CONTROL
2x40W LIGHTS
EXTENDED VAPOUR GUIDE
FOR INSTALLATION BETWEEN FURNITURE 60cm WIDE
EXTRACTION & RECIRCULATION
FILTERS
2 WASHABLE ALUMINIUM GREASE FILTER CASSETTES
CHARCOAL FILTER AS OPTION - LONGLIFE
SILVER

240m³/h
62dB(A)
60cm

60cm Turbo Integrated Hood

COMPETENCE HE6260ml

HOOD FEATURES & FUNCTIONS
ELECTRONIC VARIABLE SLIDER SPEED CONTROL WITH INTENSIVE SETTING
TWIN MOTORS FOR HIGH PERFORMANCE
2x40W LIGHTS
EXTENDED VAPOUR GUIDE
FOR INSTALLATION BETWEEN FURNITURE 60cm WIDE
EXTRACTION & RECIRCULATION
FILTERS
2 WASHABLE ALUMINIUM GREASE FILTER CASSETTES
CHARCOAL FILTER AS OPTION - LONGLIFE
SILVER

430m³/h
64dB(A)
60cm

55cm Stainless Steel Turbo Canopy

COMPETENCE C570Dm

HOOD FEATURES & FUNCTIONS
ELECTRONIC VARIABLE SLIDER SPEED CONTROL WITH INTENSIVE SETTING
NEON LIGHT
FOR INSTALLATION INTO AN ISLAND CHIMNEY, WALL OR CORNER UNIT
EXTRACTION & RECIRCULATION
FILTERS
WASHABLE STAINLESS STEEL GREASE FILTER CASSETTE
CHARCOAL FILTER AS OPTION - CAKLF
STAINLESS STEEL

440m³/h
65dB(A)
55cm

80cm Stainless Steel Turbo Canopy Hood

COMPETENCE HL7275m

HOOD FEATURES & FUNCTIONS
VARIABLE 4 SPEED SLIDER CONTROL WITH INTENSIVE SETTING
2 HALOGEN LIGHTS
FOR INSTALLATION INTO AN ISLAND CHIMNEY, WALL OR CORNER UNIT
EXTRACTION & RECIRCULATION
FILTERS
2 WASHABLE STAINLESS STEEL GREASE FILTERS
CHARCOAL FILTER AS OPTION - TYPE200
STAINLESS STEEL

610m³/h
69dB(A)
80cm

AEG

coffee machines

AEG's coffee machine comes in a stylish design that co-ordinates beautifully with AEG Competence ovens and semi-integrated dishwashers.

FORM
THE PERFECT DESIGN SOLUTION

The AEG coffee machine is designed to coordinate with other products in the AEG range. Adding to the perfect kitchen style, this coffee machine will give a professional, yet sophisticated look as well as the perfect coffee.

function
the perfect cup of coffee

Whether it's a freshly ground coffee, herbal tea or a hot chocolate, the AEG coffee machine does more than just make coffee. The AEG Coffee Machine makes 'coffee shop' quality drinks every time, only this one is open all hours.

The AEG Coffee Machine utilises a range of coffee types, including coffee beans, ground coffee or coffee pods for ultimate convenience.

Coffee Machine Functions

Steam/Water Spout

Dispenses steam or hot water from a flexible spout to offer a wider selection of hot drinks in addition to coffee such as cappuccino, hot chocolate and tea. The spout can be pushed away neatly and easily when not in use.

Coffee Bean Grinder

Coffee beans can be ground to suit your taste for freshly ground coffee at the touch of the button. The grinder is regulated to deliver the perfect espresso. However this can be adjusted for personal preference. Indicators on the bean holder lid make returning to previous settings easy.

COFFEE TYPES For use with coffee beans, ground coffee or coffee pods.

COFFEE PRESS Firmly compress the ground coffee with the press in preparation for making coffee.

WATER TANK With a new docking station, the water tank is easy to use and the sensor will indicate on the LED display when the tank needs to be refilled. The water tank will take 2.5 litres of fresh water. Coffee and water quantity are preset but adjustable for personal preference.

BRITA WATER FILTER Decalcifies the water preventing the build up of limescale.

SECURITY LOCK Holds the coffee machine into the kitchen furniture, ensuring ease of access to the water tank, coffee bean holder and grinder regulator.

DRIP TRAY Collects any spilt water or coffee, to minimise splashing on to the work surface. It is easier to keep working area clean & tidy.

WIRE CUP RACK For making espresso, ensuring the cup is near the nozzle for minimal splashes.

HALOGEN LIGHT Perfect illumination of the working area.

CONTROLS

ELECTRONIC TOUCH CONTROLS Electronic touch controls for ease of use, ease of cleaning and stunning design.

PRE-PROGRAMMED COFFEE Enables a selection of coffee including: espresso, double espresso, regular coffee, double regular coffee.

ACCESSORIES

ACCESSORY DRAWER Provides storage and work space at a convenient height.

WASTE DISH Durable and easy to clean dish with central bar for emptying filter of used coffee grounds. The dish can be used to collect the waste from several cups made at any one time or emptied after each use, as preferred.

A range of accessories come with the AEG coffee machine:

FILTER HOLDER Fit with a filter and nozzle ready for preparing coffee.

WIRE CUP RACK for espresso making.

2 FILTERS Allows the user to make either 1 or 2 cups at a time.

2 NOZZLES 1 and 2 cup nozzles to use with the filters above. The 2 cup nozzle has an adjustable screw to allow regulation of coffee flow, delivering the required volume into each cup.

1 SCOOP Useful when using pre-ground coffee. It is required when returning to original coffee settings.

COFFEE PREPARATION STAND For total convenience.

The accessories can be cleaned in the dishwasher.

INSTALLATION

The AEG coffee machine and accessory drawer with telescopic runners can be easily installed into kitchen furniture to perfectly match your oven and dishwasher. Alternatively the modular unit provides additional storage space and flexible positioning.

Coffee Machine Modular Mobile Unit

Stylish Stainless Steel Housing for the new coffee machine. Mobile Unit on lockable castors for flexibility of positioning. Upper part houses the coffee machine, the lower part can house an AEG refrigerator or freezer for convenience or alternatively is a cupboard for storage.

Refrigeration models suitable are Santo K988004i, Santo K988404i or freezer AG988504i (see pages 70 – 72).

Beautifully co-ordinated integrated Coffee Machine with Accessory Drawer

PE8038M
INTEGRATED COFFEE MACHINE

FEATURES & FUNCTIONS
COFFEE BEAN HOLDER (300g CAPACITY)
COFFEE BEAN GRINDER
COFFEE PRESS
HALOGEN LIGHT
WATER TANK (2.5L CAPACITY)
BRITA® FILTER
WATER TANK DOCKING STATION
WATER SENSOR WITH LED WHEN REFILLING REQUIRED
STEAM/WATER SPOUT WITH LED INDICATORS
PRACTICAL DRIP TRAY
TELESCOPIC RUNNERS FOR EASY ACCESS
SECURITY LOCK
CONTROLS
ELECTRONIC TOUCH CONTROLS
LED DISPLAY
PRE-PROGRAMMED COFFEE SELECTION
2 ROTARY CONTROL KNOBS FOR COFFEE SELECTION AND STEAM/WATER OPERATION
ACCESSORIES
COFFEE FILTER HOLDER
1 CUP FILTER & NOZZLE
2 CUP FILTER & NOZZLE
SCOOP
WIRE CUP RACK
PE8038M STAINLESS STEEL

AEG coffee machines

give you 'coffee shop' coffee, at home

Coffee Machine Modular Mobile Unit

PES8038
ACCESSORY DRAWER

FEATURES & FUNCTIONS
USEFUL STORAGE SPACE FOR COFFEE MACHINE ACCESSORIES
STAINLESS STEEL INNER LINER
DURABLE HOLDER FOR FILTERS, FILTER HOLDER AND SCOOP
COFFEE PREPARATION STAND
WASTE DISH
STYLISH RECESSED ADJUSTABLE HANDLE
TELESCOPIC RUNNERS
PES8038M STAINLESS STEEL

PBM8036
MODULAR MOBILE UNIT

FEATURES & FUNCTIONS
STYLISH MOBILE HOUSING UNIT
LOCKABLE CASTORS
UPPER HOUSING FOR COFFEE MACHINE & DRAWER
DIVIDING SHELF
LOWER HOUSING FOR AEG REFRIGERATION
PBM8036M STAINLESS STEEL

PERFEKT IN FORM UND FUNKTION AEG

dishwashing

The robust square control buttons and LED display appear both modern and hi-tech. They are also easy to use and easy to clean.

FORM SOUND ENGINEERING

AEG dishwashers, with their robust and simple design, combined with their high quality build, fit perfectly into any kitchen. Their 'form' takes many shapes and sizes to fit any space from the small compact dishwasher to the extra height dishwasher.

function perfect dishes

AEG's dishwashing range delivers state of the art performance, with no compromise on the result, irrespective of the load. The range starts at 'AA', and offers the best possible results in terms of cleanliness, shine, dryness, time, noise, water & energy consumption.

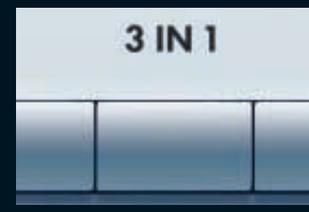

AEG's unique 3-in-1 option modifies the dishwasher programmes, giving the best results with 3-in-1 detergents. 3-in-1 are the most convenient and popular choice of detergent.

Dishwasher Functions

New 'Spotlight'
The red beam projected on to the floor shows that the programme is running.

3-in-1 Detergent Option
Available on most models, this optimises the cleaning results of 3-in-1 detergents by modifying the time and temperature of each phase of the programme. This ensures that the different elements of the detergent are used in the correct part of the cycle for perfect results.

LCD Display
Scrolls through the programmes indicating programmes, times and options available. Counts down the pre-set delay time then displays programme phase and time to completion. Indicates when salt and rinse aid need refilling.

Finish detergent products are recommended for use in the AEG range of dishwashers, to achieve exceptional cleaning performance.

EXTREMELY QUIET Our dishwashers are extremely quiet in operation and because they are built-in to the kitchen it is difficult to know they are there at all.

PLACE SETTINGS AEG offer a range of dishwashers with variable capacity from the compact with 6 place settings to full size dishwashers with 12 place settings.

WASH PROGRAMMES A range of programmes and temperatures to suit all crockery washing requirements.

SENSORLOGIC Ensures the minimum water, detergent and electricity are used to ensure the best wash results.

ADVANCED FUZZY LOGIC Uses sensors in the dishwasher to electronically fine-tune the selected programme to the load.

LED DISPLAY Displays any Delay Start information along with the time remaining until the wash is finished.

DELAY START Delays the start of the programme until convenient.

TIME TO PROGRAMME END Indicates the amount of time remaining until the programme ends.

PROGRAMME PROGRESS INDICATOR Easy to use - indicates the stage of the programme.

END OF PROGRAMME BUZZER Audible buzzer to let you know when the programme is finished.

SALT REFILL INDICATOR Reminder to refill the salt container to maintain excellent results.

RINSE AID REFILL INDICATOR Reminder to refill the rinse aid dispenser to maintain excellent results.

AQUA CONTROL Provides extra protection against flooding, by measuring water coming into the dishwasher. If water leaks from the closed system, sensors detect this and stop more water entering the dishwasher by closing a valve. In some models, this is accompanied by the 'Aqua Alarm' which draws attention to the machine.

NEW DOUBLE FULCRUM HINGES Available on extra height model for easy installation - no cut-out of plinth required.

TURBO FAN DRYING Uses a fan to increase air circulation within the dishwasher, reducing drying time and providing an 'A' rated drying performance.

CONDENSER DRYING Residual drying with the added benefit of a condenser unit providing faster, more efficient drying.

RESIDUAL DRYING An energy efficient method of drying, using the heat from the final rinse to dry the pots.

DISHWASHER LOADING PERFORMANCE

INTERIOR ILLUMINATION The dishwasher light comes on when the door is opened, enabling easier loading and unloading.

HEIGHT ADJUSTABLE BASKETS Provides more flexibility as bigger items can be loaded in the lower basket, by raising the upper basket on one side, even if the basket is loaded.

LONG STEM WINE GLASS HOLDER For special-occasion glasses, this special flexible support can be folded away when it is not required.

NEW ADJUSTABLE GLASS SUPPORTS Special supports for glassware, stem glasses 'click' into place, protecting against breakage.

FOLDABLE PLATE SUPPORTS Ideal when loading large containers such as casserole dishes and salad bowls.

FOLD OUT CUTLERY BASKET Enables cleaned sets of cutlery to be removed from dishwasher more easily and hygienically.

LONG KNIFE TRAY Washes large utensils and knives safely.

NEW METALLIC GREY BASKETS All dishwashers have new hardwearing grey baskets for minimum discolouration.

WASH PROGRAMMES

INTENSIVE-CARE 70°C WASH An intensive 70°C wash cycle where the final hot rinse is extended by 11 minutes at 70°C, thereby killing 99.9% of all harmful bacteria.

INTENSIVE 70°C WASH An intensive 70°C wash cycle for a hygienic hot wash, ideal for stubborn soiled dishes.

NORMAL 65°C WASH Ideal for a mixed wash load (e.g. plates, pans and crockery).

AUTOMATIC WASH Electronically senses the size of the load and the level of soiling. Automatically selects the optimum wash, rinse and drying phases to give perfect cleaning performance.

EAT-LOAD-GO The only 'Quick Wash' that delivers an 'A' wash in 30 minutes. Ideal for dinner parties; use the same starter crockery for the dessert.

ECO ENERGY SAVING 55°C WASH Energy saving wash programme with no-compromise results.

ECO 50°C WASH More energy efficient and environmentally friendly, this programme offers an extended wash programme at lower temperatures.

GLASS-CARE 45°C WASH The best cleaning result for sensitive items including crystal glasses, by ensuring the rinse aid is reduced to avoid deterioration of the glass surface resulting in perfect, shiny and clean glasses.

GLASS 40°C WASH Glass programme suitable for all dishwasher-safe glassware.

PRE-RINSE Keeps dishes fresh until they are ready to be washed with a full load.

ENERGY RATING

Measures the 3 elements of dishwashing.
A - Most energy efficient rating – saves running costs.
A - Best wash performance – gives cleanest results.
A - Efficient drying performance – saves time.

INTEGRATED WASHER TYPES

NEW EXTRA HEIGHT DISHWASHER The dishwasher can be installed under higher worktop surfaces without leaving unsightly gaps. Extra space is available within the dishwasher, allowing more flexible loading for large plates and pots and pans.

NEW IN-COLUMN DISHWASHER Easier to load and unload dishwasher without bending.

COMPACT DISHWASHER Ideal for smaller households or apartments, where kitchen space is at a premium.

FULLY INTEGRATED DISHWASHER The dishwasher is hidden behind a full height furniture door and operated by controls on the top edge of the dishwasher door.

SEMI-INTEGRATED DISHWASHER The dishwasher has a visible control panel, which matches in height to the control panel of an oven and drawer-line furniture. A short furniture door is affixed below the control panel.

SLIM-LINE DISHWASHER A 45cm fully integrated dishwasher for smaller spaces.

BUILT-UNDER DISHWASHER The dishwasher has a visible control panel and a full-height stainless steel door. No furniture door is required as it is built under the worktop.

AEG's quietest range ever

starting at a whisper quiet 41dB(A)

60cm semi-integrated dishwasher

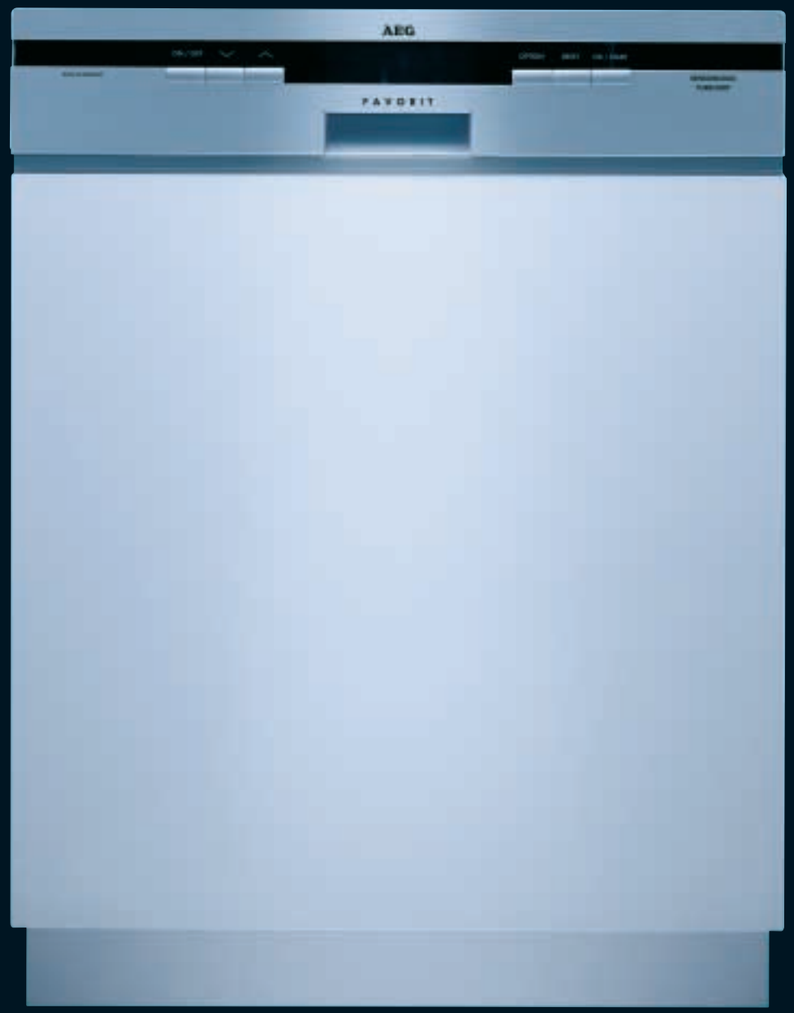

FAVORIT 88070i

41dB | 12 | 8

- DISHWASHING FUNCTIONS
- SENSORLOGIC
- ADVANCED FUZZY LOGIC
- LCD DISPLAY
- DELAY START
- TIME TO PROGRAMME END
- 3 IN 1 DETERGENT OPTION
- SALT REFILL INDICATOR
- RINSE AID INDICATOR
- AQUA CONTROL
- 5 WASH TEMPERATURES
- TURBO DRYING
- DISHWASHING LOADING PERFORMANCE
- INTERIOR LIGHT
- HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
- LONG STEM WINE GLASS HOLDER
- ADJUSTABLE GLASS SUPPORTS
- FOLDABLE PLATE SUPPORTS
- FOLD OUT CUTLERY BASKET
- LONG KNIFE TRAY
- WASH PROGRAMMES
- INTENSIVE CARE 70°C WASH
- NORMAL 65°C WASH
- AUTOMATIC 50-65°C WASH
- EAT-LOAD-GO
- ECO 50°C WASH
- NORMAL 50°C WASH
- GLASS-CARE 45°C WASH
- PRE-RINSE
- ENERGY RATING AAA

STAINLESS STEEL F88070iM

PERFEKT IN FORM UND FUNKTION

AEG

semi-integrated

60cm Semi-integrated Dishwasher

FAVORIT 65070i

45dB | 12 | 5

- DISHWASHING FUNCTIONS
- SENSORLOGIC
- ADVANCED FUZZY LOGIC
- LED TIMER DISPLAY
- DELAY START
- TIME TO PROGRAMME END
- 3 IN 1 DETERGENT OPTION
- SALT REFILL INDICATOR
- RINSE AID INDICATOR
- AQUA CONTROL
- 4 WASH TEMPERATURES
- TURBO DRYING
- DISHWASHING LOADING PERFORMANCE
- HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
- ADJUSTABLE GLASS SUPPORTS
- FOLDABLE PLATE SUPPORTS
- WASH PROGRAMMES
- INTENSIVE CARE 70°C WASH
- AUTOMATIC 50-65°C WASH
- EAT-LOAD-GO
- ECO 50°C WASH
- GLASS-CARE 45°C WASH
- ENERGY RATING AAA

ALUTEC® F65070iA
STAINLESS STEEL F65070iM
BLACK F65070iB

60cm Semi-integrated Dishwasher

FAVORIT 44070i

48dB | 12 | 4

- DISHWASHING FUNCTIONS
- ADVANCED FUZZY LOGIC
- DELAY START
- PROGRAMME PROGRESS INDICATOR
- 3 IN 1 DETERGENT OPTION
- SALT REFILL INDICATOR
- RINSE AID INDICATOR
- AQUA CONTROL
- 3 WASH TEMPERATURES
- CONDENSER DRYING
- DISHWASHING LOADING PERFORMANCE
- HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
- ADJUSTABLE GLASS SUPPORTS
- FOLDABLE PLATE SUPPORTS
- WASH PROGRAMMES
- INTENSIVE CARE 70°C WASH
- NORMAL 65°C WASH
- EAT-LOAD-GO
- ECO 50°C WASH
- ENERGY RATING AAB

STAINLESS STEEL F44070iM
WHITE F44070iW
DARK BROWN F44070iD

built under

60cm Built-Under Stainless Steel Dishwasher

FAVORIT 65070U

45dB | 12 | 5

- DISHWASHING FUNCTIONS
- SENSORLOGIC
- ADVANCED FUZZY LOGIC
- LED TIMER DISPLAY
- DELAY START
- TIME TO PROGRAMME END
- 3 IN 1 DETERGENT OPTION
- SALT REFILL INDICATOR
- RINSE AID INDICATOR
- AQUA CONTROL
- 4 WASH TEMPERATURES
- TURBO DRYING
- DISHWASHING LOADING PERFORMANCE
- HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
- ADJUSTABLE GLASS SUPPORTS
- FOLDABLE PLATE SUPPORTS
- WASH PROGRAMMES
- INTENSIVE CARE 70°C WASH
- AUTOMATIC 50-65°C WASH
- EAT-LOAD-GO
- ECO 50°C WASH
- GLASS-CARE 45°C WASH
- ENERGY RATING AAA

STAINLESS STEEL F65070UM

AEG's quietest range ever

starting at a whisper quiet 41dB(A)

60cm Fully Integrated Dishwasher with 8 Wash Programmes

FAVORIT 88070Vi

41dB | 12 | 8

- DISHWASHING FEATURES & FUNCTIONS
- SENSORLOGIC
- ADVANCED FUZZY LOGIC
- LCD DISPLAY
- DELAY START
- TIME TO PROGRAMME END
- END OF PROGRAMME AUDIBLE BUZZER
- SPOTLIGHT
- 3 IN 1 DETERGENT OPTION
- SALT REFILL INDICATOR
- RINSE AID INDICATOR
- AQUA CONTROL
- 5 WASH TEMPERATURES
- TURBO DRYING
- DISHWASHING LOADING PERFORMANCE
- INTERIOR LIGHT
- HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
- LONG STEM WINE GLASS HOLDER
- ADJUSTABLE GLASS SUPPORTS
- FOLDABLE PLATE SUPPORTS
- FOLD OUT CUTLERY BASKET
- LONG KNIFE TRAY
- WASH PROGRAMMES
- INTENSIVE CARE 70°C WASH
- NORMAL 65°C WASH
- AUTOMATIC 50-65°C WASH
- EAT-LOAD-GO
- ECO 50°C WASH
- NORMAL 50°C WASH
- GLASS-CARE 45°C WASH
- PRE-RINSE
- ENERGY RATING AAA

PERFEKT IN FORM UND FUNKTION

AEG

fully integrated

60cm Fully Integrated
Dishwasher

FAVORIT 86070Vi

43dB | 12 | 6

DISHWASHING FUNCTIONS
SENSORLOGIC
ADVANCED FUZZY LOGIC
LED TIMER DISPLAY
DELAY START
TIME TO PROGRAMME END
END OF PROGRAMME AUDIBLE BUZZER
SPOTLIGHT
3 IN 1 DETERGENT OPTION
SALT REFILL INDICATOR
RINSE AID INDICATOR
AQUA CONTROL
5 WASH TEMPERATURES
TURBO DRYING
DISHWASHING LOADING PERFORMANCE
HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
LONG STEM WINE GLASS HOLDER
ADJUSTABLE GLASS SUPPORTS
FOLDABLE PLATE SUPPORTS
FOLD OUT CUTLERY BASKET
WASH PROGRAMMES
INTENSIVE CARE 70°C WASH
AUTOMATIC 50-65°C WASH
EAT-LOAD-GO
ECO 50°C WASH
GLASS-CARE 45°C WASH
PRE-RINSE
ENERGY RATING AAA

60cm Fully Integrated
Dishwasher

FAVORIT 44070Vi

48dB | 12 | 4

DISHWASHING FUNCTIONS
ADVANCED FUZZY LOGIC
DELAY START
END OF PROGRAMME AUDIBLE BUZZER
SALT REFILL INDICATOR
RINSE AID INDICATOR
AQUA CONTROL
3 WASH TEMPERATURES
CONDENSER DRYING
DISHWASHING LOADING PERFORMANCE
HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
ADJUSTABLE GLASS SUPPORTS
FOLDABLE PLATE SUPPORTS
WASH PROGRAMMES
INTENSIVE CARE 70°C WASH
NORMAL 65°C WASH
EAT-LOAD-GO
ECO 50°C WASH
ENERGY RATING AAB

60cm Fully Integrated
EXTRA HEIGHT Dishwasher

FAVORIT 64070ViL

48dB | 12 | 4

DISHWASHING FUNCTIONS
SENSORLOGIC
ADVANCED FUZZY LOGIC
LED TIMER DISPLAY
DELAY START
TIME TO PROGRAMME END
END OF PROGRAMME AUDIBLE BUZZER
SPOTLIGHT
3 IN 1 DETERGENT OPTION
SALT REFILL INDICATOR
RINSE AID INDICATOR
AQUA CONTROL
4 WASH TEMPERATURES
TURBO DRYING
DISHWASHING LOADING PERFORMANCE
HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
ADJUSTABLE GLASS SUPPORTS
FOLDABLE PLATE SUPPORTS
LONG KNIFE TRAY
WASH PROGRAMMES
INTENSIVE CARE 70°C WASH
AUTOMATIC 50-65°C WASH
EAT-LOAD-GO
NORMAL 50°C WASH
ENERGY RATING AAA

55cm Fully Integrated
IN-COLUMN Dishwasher

FAVORIT 64570Vi

43dB | 11 | 4

DISHWASHING FUNCTIONS
SENSORLOGIC
ADVANCED FUZZY LOGIC
LED TIMER DISPLAY
DELAY START
TIME TO PROGRAMME END
END OF PROGRAMME AUDIBLE BUZZER
3 IN 1 DETERGENT OPTION
SALT REFILL INDICATOR
RINSE AID INDICATOR
AQUA CONTROL
3 WASH TEMPERATURES
CONDENSER DRYING
DISHWASHING LOADING PERFORMANCE
HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
ADJUSTABLE GLASS SUPPORTS
FOLDABLE PLATE SUPPORTS
WASH PROGRAMMES
INTENSIVE CARE 70°C WASH
AUTOMATIC 50-65°C WASH
EAT-LOAD-GO
ECO ENERGY SAVING 55°C WASH
ENERGY RATING AAA

OPTIONAL STAINLESS STEEL DOOR Fi55m (SHOWN ABOVE)

45cm Fully Integrated
SLIMLINE Dishwasher

FAVORIT 84470Vi

47dB | 9 | 4

DISHWASHING FUNCTIONS
SENSORLOGIC
ADVANCED FUZZY LOGIC
LED TIMER DISPLAY
DELAY START
TIME TO PROGRAMME END
END OF PROGRAMME AUDIBLE BUZZER
SPOTLIGHT
3 IN 1 DETERGENT OPTION
SALT REFILL INDICATOR
RINSE AID INDICATOR
AQUA CONTROL
4 WASH TEMPERATURES
TURBO DRYING
DISHWASHING LOADING PERFORMANCE
HEIGHT ADJUSTABLE UPPER BASKET – FULL LOAD
ADJUSTABLE GLASS SUPPORTS
FOLDABLE PLATE SUPPORTS
FOLD OUT CUTLERY BASKET
WASH PROGRAMMES
INTENSIVE CARE 70°C WASH
AUTOMATIC 50-65°C WASH
EAT-LOAD-GO
NORMAL 50°C WASH
ENERGY RATING AAA

55cm Fully Integrated COMPACT
Dishwasher (45cm high)

FAVORIT 45250Vi

45dB | 6 | 5

DISHWASHING FEATURES & FUNCTIONS
DELAY START
END OF PROGRAMME AUDIBLE BUZZER
SALT REFILL INDICATOR
RINSE AID INDICATOR
FLOOD PROTECTION
5 WASH TEMPERATURES
RESIDUAL DRYING
DISHWASHING LOADING PERFORMANCE
GLASS SUPPORTS
WASH PROGRAMMES
INTENSIVE 70°C WASH
NORMAL 65°C WASH
ECO ENERGY SAVING 55°C WASH
ECO 50°C WASH
GLASS 40°C WASH
ENERGY RATING AAB

OPTIONAL DOORS: STAINLESS STEEL FiC-M
ALUTEC® FiC-A

AEG

laundry

Clearly laid-out control panel with simple rotary dial makes programme selection easy. The dial is fully electronic for maximum precision, reliability and programming flexibility.

FORM

AEG's fully integrated laundry range, with its simple design and high quality build, offers the perfect design solution for every kitchen. Choose from a dedicated washing machine or the ultimate space saving practicality of a washer dryer.

function

MINI PROGRAMME

There is a complete 30 minute mini-programme, perfect for refreshing lightly soiled garments.

AEG gives you control, with a wide range of specialised wash programmes to suit your laundry requirements. And with features such as foam suppression and aqua lock flood protection, AEG gives you confidence.

Laundry Functions

Spin SPIN UP-TO 1400RPM

The higher the spin speed, the more water will be expelled from the clothes giving a shorter drying time.

Load

With a load of 4.5kg, the average weekly wash will easily be fulfilled. Select a convenient half load wash-to-dry programme in the washer dryers.

Programmes

AEG integrated washing machines have 24 wash programmes to ensure that every load is washed to perfection.

AEG recommend the Ariel Range for outstanding cleaning and fabric care.

WASH FEATURES

VARIOMATIC SPINS This alternates progressively faster spinning with frequent tumbling stages, to minimise creasing.

SENSORTRONIC FOAM SUPPRESSION If excess foam is detected water is added to the wash ensuring that foaming is reduced, for improved rinsing.

SINGLE KNOB PROGRAMME SELECTOR Easy to use programme selector knob to select the desired programme.

LED TIME DISPLAY Counts down the time remaining.

DELAY START Set the programme to start when convenient. This allows delays from 1 hour to 24 hours.

LED WASH PHASE INDICATOR Each LED lights up to indicate which wash phase the machine is currently in.

AQUA LOCK FLOOD PROTECTION An internal system, which monitors the water level to detect leakage. If detected water will be prevented from entering the machine and the display will indicate this problem.

EASY ACCESS FLUFF FILTER Situated above the plinth line, a clear filter ensures that the appliance is working to full potential and maximum efficiency. A indicator LED on some models illuminates when cleaning is required.

SPIN REDUCTION, NO SPIN AND RINSE HOLD These options allow you to take control of your laundry and minimise creasing.

WASH PROGRAMMES

WOOL CRADLE PROGRAMME Takes extra care of woollens by gently moving them through the wash solution from side to side avoiding any tumbling action that is unsuitable for wool.

DELICATE PROGRAMME A gentle programme designed for mixed fabrics found in delicate clothes.

EASY IRON PROGRAMME Reduces ironing time by up to 50% through actively reducing creases in fabric caused throughout the wash and spin cycle. This programme tumbles intermittently at the end of the cycle.

30 MINUTE MINI PROGRAMME Ideal for refreshing clothes after being worn only once, the Mini Programme takes just 30 minutes for total convenience.

EXTRA RINSE This produces the perfect rinse results. Ideal for sensitive skin, it automatically inserts an extra rinse into the wash cycle if too much detergent is detected on the final rinse. A push button allows self selection of this feature.

BIO WASH PHASE Holds the wash at 40°C for almost 10 minutes before continuing with the cycle, resulting in better stain removal by increasing the effectiveness of enzymes in the detergent.

BIOLOGICAL DETERGENT For cleaner clothes at lower temperatures.

ENERGY SAVING PROGRAMME On ALL AEG Integrated Appliances, an intensive wash action at high temperature, saving energy and money.

COTTON PROGRAMME On ALL AEG Integrated Appliances, the Cotton Programme gives outstanding wash results and also minimises energy and water.

ENERGY RATING ALL AEG washing machines achieve AA for energy and wash performance and AEG washer dryers achieve A rated wash performance across the range.

STAIN ACTION A unique programme designed to optimise the effectiveness of in-wash stain removers for maximum cleaning power.

DRYING FEATURES

TURBO CONDENSER DRYING Reverse tumble action and a cooling down phase for minimal creasing and improved fabric care.

Fully Integrated Washing Machine

LAVAMAT 14500Vi

4.5kg | 24 | 1400

WASH SPECIALITIES
- GENTLE WOOL CRADLE
- DELICATES
- EASY IRON
- 30 MINUTE MINI PROGRAMME
- EXTRA RINSE OPTIONS
- BIO WASH PHASE

WASH FEATURES
- VARIOMATIC® SPIN CYCLE
- SENSORTRONIC FOAM SUPPRESSION
- SINGLE KNOB EASY READ PROGRAMME SELECTOR
- LED TIME DISPLAY
- START DELAY
- WASH PHASE INDICATOR
- AQUA-LOCK FLOOD PROTECTION
- EASY ACCESS FLUFF FILTER WITH INDICATOR LIGHT

ENERGY RATING AAB

LAVAMAT 10505Vi

As above with 1000rpm spin speed

1000

ENERGY RATING AAC

LAVAMAT TURBO 14700ViT

4.5kg | 24 | 1400

WASH SPECIALITIES
- GENTLE WOOL CRADLE
- DELICATES
- EASY IRON
- 30 MINUTE MINI PROGRAMME
- EXTRA RINSE OPTIONS
- BIO WASH PHASE

WASH FEATURES
- VARIOMATIC® SPIN CYCLE
- SENSORTRONIC FOAM SUPPRESSION
- SINGLE KNOB EASY READ PROGRAMME SELECTOR
- LED TIME DISPLAY
- START DELAY
- WASH PHASE INDICATOR
- AQUA-LOCK FLOOD PROTECTION
- EASY ACCESS FLUFF FILTER

DRY SPECIALTIES
- 2 TEMPERATURE DRYING
- CONDENSER TURBO DRYING
- REVERSE TUMBLE + COOL DOWN
- 2.25kg DRYING CAPACITY

ENERGY RATING CA

CA Wash to cupboard dry
AAB Wash to spin dry

Fully Integrated Washer Dryer

LAVAMAT TURBO 12700ViT

As above with 1200rpm spin speed

1200

ENERGY RATING DA

DA Wash to cupboard dry
AAB Wash to spin dry

PERFEKT IN FORM UND FUNKTION

AEG

cooling

The pale blue design for accessories such as salad crispers, dairy compartments, and freezer drawers reflects freshness, hygiene and a clean environment for the fridge and freezer.

FORM COOL DESIGN

The AEG cooling range has a stylish new design that supports the modern, sleek yet simple kitchen dream. The pale blue interiors with Alu-silver and square push buttons complement AEG's modern new design.

function chilled to perfection

AEG cooling has a range of innovative functions designed for advanced food preservation. AEG's own Coolmatic and Frostmatic ensure excellent food preservation, whilst features such as anti-bacterial coating, air purifier and door open alarm provide the ultimate in reassurance.

The AEG cooling range has new Longfresh Chill Zones, which keep food fresher for longer.

Fridge Features and Functions

Coolmatic

Quickly chills fresh foods, preserving flavour, colour and nutritional value. Ideal when large quantities of fresh food are placed into the fridge, great for party food and drinks.

Longfresh

CHILL ZONES 2 large drawers on easy glide telescopic runners for longer storage of fresh meat, fish, salads & vegetables. The temperature is maintained between 1°C to 3°C and full humidity controls on both drawers aid the preservation of the food, providing safe storage and keeping it fresher for longer.

AIR CIRCULATION FAN A fan in the upper part of the fridge aids air circulation and maintains a constant temperature within the fridge compartment, providing safe storage.

BACTERIAL PROTECTION A coating on the walls and the doors inside the fridge prevents the growth and spread of bacteria and odours.

AIR PURIFIER A special filter removes odours so they are not transported within the fridge.

HUMIDITY CONTROLS Humidity controls regulate condensation within the salad/ vegetable drawers and allow self selection to suit individual food storage.

ELECTRONIC TEMPERATURE CONTROLS WITH DIGITAL LED DISPLAY Advanced electronic controls which are simple to use and ensure precise temperature control. The controls are child proof and the LED display provides reassurance that the optimum temperature is being maintained.

SIMPLE ELECTRONIC TEMPERATURE CONTROLS New electronics give precise control on the frost-free fridge freezer.

FRIDGE PRECISION STORAGE

SALAD CRISPER(S) Helps to keep fruit and vegetables crisp and fresh. On under-counter models, the salad crisper is recessed to make best use of the space available.

LARGE TELESCOPIC DRAWER Large drawer for storing fruit and vegetables with an internal food divider/ support for large bottles.

FULL & HALF DEPTH SHELVES A selection of full and half depth shelves are included and offer flexibility for storage. Tall items can be stored at the front of full depth shelves whilst smaller items can be stacked behind them on the half depth shelves, using all the available storage space provided.

PRINTED GLASS SHELVES Stylish glass shelves have flexible positioning and are strong, spill safe and easy to remove and clean.

ANTI-ROLL BOTTLE SUPPORT Flexible and convenient can and bottle support making good use of the available space.

FRIDGE DOOR PRECISION STORAGE

COVERED DAIRY COMPARTMENT Keeps dairy products fresh and untainted by other smells.

CAN SHELVES Convenient door shelves for jars and bottles, providing secure storage space.

BOTTLE SHELF A storage area in the bottom of the fridge door for large bottles. Metal trims/sliders hold the bottles in place.

HALF WIDTH SLIDING DOOR SHELVES Enables tall bottles to be stacked adjacent to the sliding shelf on a lower level and provides a versatile storage space. Ideal for small items.

Freezer Features and Functions

Frostmatic

Ideal when putting fresh food in the freezer, to quickly freeze the food and preserve flavour, nutritional value and colour of food. Protects already frozen food.

Frost Free

NEVER needs defrosting for convenience and time saving, making the appliance quicker and easier to clean.

4 STAR FREEZER Full freezer capability, enabling you to freeze down fresh food as well as storing frozen foods for up to 3 months.

FAST-FREEZE PUSH BUTTON Quickly freezes fresh food. Ideal for when fresh food is first placed into the freezer.

HIGH TEMPERATURE ALARM Conveniently alerts you if the freezer door is left open or if there has been a power cut. Provides reassurance for safer food storage.

DOOR OPEN WARNING LIGHTS A light alerts you if the freezer temperature rises if the door is left open or there has been a power cut.

MECHANICAL FRIDGE/FRIDGE FREEZER LED DISPLAYS LED's indicate on/ off function (green), fast freeze function (yellow) and high temperature warning (red).

FREEZER PRECISION STORAGE

FREEZER SHELF Dividing shelf in the freezer compartment.

SOLID FRONTED FREEZER DRAWERS Ensures secure storage of frozen foods.

TRANSPARENT FREEZER DRAWERS Smart design which makes it quick and easy to identify and select food from within the freezer.

ADJUSTABLE THERMOSTAT COIN/KNOB
A control knob to enable easy adjustment of the internal temperature of the fridge freezer.

DIMENSIONS
Individual height is indicated on each product.
Full details can be found in the specification tables at the back of the brochure.

AEG cooling

designed to store every item in perfect condition

NEW 'A+' Energy Rated In-column Larder Refrigerator with LONGFRESH Chill Zones

SANTO Z 912004i

COOL-MATIC | 122cm

FRIDGE FEATURES & FUNCTIONS
FRIDGE NET CAPACITY 135 LITRES
COOLMATIC
LONGFRESH CHILL ZONES, 2 LARGE DRAWERS ON TELESCOPIC RUNNERS
LONGFRESH NET CAPACITY 52 LITRES
AIR CIRCULATION FAN
BACTERIAL PROTECTION
AIR PURIFIER
HUMIDITY CONTROLS
ELECTRONIC TEMPERATURE CONTROLS WITH DIGITAL LED DISPLAY
AUTO DEFROST
FRIDGE PRECISION STORAGE
3 FULL & 2 HALF DEPTH SHELVES
PRINTED GLASS SHELVES
ANTI-ROLL BOTTLE SUPPORT
FRIDGE DOOR PRECISION STORAGE
COVERED DAIRY COMPARTMENT
1 CAN SHELF WITH ALU-SILVER TRIM
BOTTLE SHELF WITH BOTTLE HOLDER AND SLIDER SUPPORT
ENERGY RATING A+

PERFEKT IN FORM UND FUNKTION

AEG

In-column refrigeration

'A+' Energy Rated
In-column Larder
Refrigerator

SANTO K912004i

COOL-MATIC | 122cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 224 LITRES
- COOLMATIC
- BACTERIAL PROTECTION
- HUMIDITY CONTROLS
- ELECTRONIC TEMPERATURE CONTROLS WITH DIGITAL LED DISPLAY
- AUTO DEFROST
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 4 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 3 CAN SHELVES WITH ALU-SILVER TRIM
- BOTTLE SHELF WITH BOTTLE HOLDER AND SLIDER SUPPORT
- HALF WIDTH SLIDING DOOR SHELF WITH LID
- ENERGY RATING A+

'A+' Energy Rated
In-column Larder
Refrigerator

SANTO K988004i

COOL-MATIC | 88cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 155 LITRES
- COOLMATIC
- BACTERIAL PROTECTION
- HUMIDITY CONTROLS
- ELECTRONIC TEMPERATURE CONTROLS WITH DIGITAL LED DISPLAY
- AUTO DEFROST
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 2 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 2 CAN SHELVES WITH ALU-SILVER TRIM
- BOTTLE SHELF WITH BOTTLE HOLDER AND SLIDER SUPPORT
- ENERGY RATING A+
- MATCHING FREEZER ARCTIS G988504i

'A' Energy Rated
In-column Larder
Refrigerator

SANTO K788004i

88cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 154 LITRES
- BACTERIAL PROTECTION
- ADJUSTABLE THERMOSTAT COIN/KNOB
- AUTO DEFROST
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 2 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 2 CAN SHELVES
- BOTTLE SHELF WITH BOTTLE HOLDER
- ENERGY RATING A
- MATCHING FREEZER ARCTIS G788504i

'A+' Energy Rated
In-column Refrigerator
with 4 Star Freezer
Compartment

SANTO K988404i

COOL-MATIC | FROST-MATIC | 88cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 117 LITRES
- COOLMATIC
- BACTERIAL PROTECTION
- HUMIDITY CONTROLS
- ELECTRONIC TEMPERATURE CONTROLS WITH DIGITAL LED DISPLAY
- AUTO DEFROST
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 1 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 2 CAN SHELVES WITH ALU-SILVER TRIM
- BOTTLE SHELF WITH BOTTLE HOLDER AND SLIDER SUPPORT
- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 17 LITRES
- FREEZING CAPACITY 2KG/ 24HRS
- FROSTMATIC
- 4* FREEZER
- POWER CUT SAFE FOR 12 HOURS
- FREEZER PRECISION STORAGE
- SOLID PLASTIC FREEZER COMPARTMENT DOOR
- ENERGY RATING A+

'A+' Energy Rated
In-column Refrigerator
with 4 Star Freezer
Compartment

SANTO K912404i

COOL-MATIC | FROST-MATIC | 122cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 189 LITRES
- COOLMATIC
- BACTERIAL PROTECTION
- HUMIDITY CONTROLS
- ELECTRONIC TEMPERATURE CONTROLS WITH DIGITAL LED DISPLAY
- AUTO DEFROST
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 2 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 3 CAN SHELVES WITH ALU-SILVER TRIM
- BOTTLE SHELF WITH BOTTLE HOLDER AND SLIDER SUPPORT
- HALF WIDTH SLIDING DOOR SHELF WITH LID
- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 17 LITRES
- FREEZING CAPACITY 2KG/24HRS
- FROSTMATIC
- 4* FREEZER
- POWER CUT SAFE FOR 12 HOURS
- FREEZER PRECISION STORAGE
- SOLID PLASTIC FREEZER COMPARTMENT DOOR
- ENERGY RATING A+

'A' Energy Rated
In-column Refrigerator
with 4 Star Freezer
Compartment

SANTO K718404i

178cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 267 LITRES
- BACTERIAL PROTECTION
- ADJUSTABLE THERMOSTAT COIN/KNOB
- AUTO DEFROST
- FRIDGE PRECISION STORAGE
- LARGE TELESCOPIC SALAD & VEGETABLE DRAWER
- 3 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 2 FULL DEPTH AND 2 HALF DEPTH CAN SHELVES
- BOTTLE SHELF WITH BOTTLE HOLDER
- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 35 LITRES
- FREEZING CAPACITY 3KG/24HRS
- 4* FREEZER
- POWER CUT SAFE FOR 20 HOURS
- FREEZER PRECISION STORAGE
- FREEZER SHELF
- SOLID PLASTIC FREEZER COMPARTMENT DOOR
- ENERGY RATING A

AEG

In-column
freezing

'A+' Energy Rated
In-column Freezer

ARCTIS G988504i

FROST-MATIC | 88cm

- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 94 LITRES
- FREEZING CAPACITY 16KG/ 24HRS
- FROSTMATIC
- 4* FREEZER
- HIGH TEMPERATURE WARNING ALARM
- ELECTRONIC TEMPERATURE CONTROLS WITH DIGITAL LED DISPLAY
- POWER CUT SAFE FOR 26 HOURS
- FREEZER PRECISION STORAGE
- 4 TRANSPARENT FREEZER DRAWERS
- ENERGY RATING A+
- MATCHING FRIDGE SANTO K988004i

'A' Energy Rated
In-column Freezer

ARCTIS G788504i

88cm

- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 94 LITRES
- FREEZING CAPACITY 16KG/ 24HRS
- 4* FREEZER
- FAST-FREEZE PUSH BUTTON
- HIGH TEMPERATURE WARNING ALARM
- DOOR OPEN WARNING LED
- MECHANICAL FREEZER LED DISPLAYS
- ADJUSTABLE THERMOSTAT COIN/KNOB
- POWER CUT SAFE FOR 20 HOURS
- FREEZER PRECISION STORAGE
- 4 SOLID PLASTIC FREEZER DRAWERS
- ENERGY RATING A
- MATCHING FRIDGE SANTO K788004i

Under-counter
cooling and freezing

'A' Energy Rated
Under-counter Larder
Refrigerator

SANTO U860004i

82cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 140 LITRES
- BACTERIAL PROTECTION
- AUTO DEFROST
- ADJUSTABLE THERMOSTAT COIN/KNOB
- FRIDGE PRECISION STORAGE
- RECESSED SALAD CRISPER WITH GLASS LIDS
- 2 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- BOTTLE SHELF WITH BOTTLE HOLDER
- HALF WIDTH SLIDING DOOR SHELF WITH LID
- ENERGY RATING A
- MATCHING FREEZER ARCTIS U860504i

'A+' Energy Rated
Under-counter Refrigerator
with 4 Star Freezer

SANTO U960404i

82cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 103 LITRES
- BACTERIAL PROTECTION
- AUTO DEFROST
- ADJUSTABLE THERMOSTAT COIN/KNOB
- FRIDGE PRECISION STORAGE
- RECESSED SALAD CRISPER WITH GLASS LIDS
- 1 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- BOTTLE SHELF WITH BOTTLE HOLDER
- HALF WIDTH SLIDING DOOR SHELF WITH LID
- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 17 LITRES
- FREEZING CAPACITY 2.5KG/24HRS
- 4* FREEZER
- POWER CUT SAFE FOR 13 HOURS
- FREEZER PRECISION STORAGE
- SOLID PLASTIC FREEZER COMPARTMENT DOOR
- ENERGY RATING A+

'A' Energy Rated
Under-counter Freezer

ARCTIS U860504i

82cm

- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 100 LITRES
- FREEZING CAPACITY 18KG/24HRS
- 4* FREEZER
- FAST-FREEZE PUSH BUTTON
- HIGH TEMPERATURE WARNING ALARM
- DOOR OPEN WARNING LED & ALARM
- MECHANICAL FREEZER LED DISPLAYS
- ADJUSTABLE THERMOSTAT COIN/KNOB
- POWER CUT SAFE FOR 29 HOURS
- FREEZER PRECISION STORAGE
- 4 TRANSPARENT FREEZER DRAWERS
- ENERGY RATING A
- MATCHING FRIDGE SANTO U860004i

AEG

'A' Energy Rated
Combi Fridge Freezer

SANTO C818434i

178cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 205 LITRES
- BACTERIAL PROTECTION
- HUMIDITY CONTROLS
- AUTO DEFROST
- ADJUSTABLE THERMOSTAT COIN/KNOB
- MECHANICAL LED DISPLAY
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 3 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 2 CAN SHELVES WITH ALU SILVER TRIM
- BOTTLE SHELF WITH BOTTLE HOLDER AND SLIDER SUPPORT
- HALF WIDTH SLIDING DOOR SHELF WITH LID
- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 70 LITRES
- FREEZING CAPACITY 4KG/24HRS
- 4* FREEZER
- FAST-FREEZE PUSH BUTTON
- FAST-FREEZE LED
- POWER CUT SAFE FOR 24 HOURS
- FREEZER PRECISION STORAGE
- 3 TRANSPARENT FREEZER DRAWERS
- ENERGY RATING A

'A' Energy Rated
FROST-FREE Combi Fridge Freezer

SANTO N718404i

178cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 210 LITRES
- BACTERIAL PROTECTION
- ADJUSTABLE THERMOSTAT COIN/KNOB
- SIMPLE ELECTRONIC TEMPERATURE CONTROLS
- AUTO DEFROST
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 3 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 2 CAN SHELVES
- BOTTLE SHELF WITH BOTTLE HOLDER
- HALF WIDTH SLIDING DOOR SHELF
- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 55 LITRES
- FREEZING CAPACITY 4KG/24HRS
- FROST FREE - NEVER HAVE TO DEFROST EVER
- 4* FREEZER
- FAST-FREEZE PUSH BUTTON
- POWER CUT SAFE FOR 21 HOURS
- FREEZER PRECISION STORAGE
- 3 SOLID FRONTED FREEZER DRAWERS
- ENERGY RATING A

'A' Energy Rated
Combi Fridge Freezer

SANTO C718404i

178cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 210 LITRES
- BACTERIAL PROTECTION
- AUTO DEFROST
- ADJUSTABLE THERMOSTAT COIN/KNOB
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 3 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 2 CAN SHELVES
- BOTTLE SHELF WITH BOTTLE HOLDER
- HALF WIDTH SLIDING DOOR SHELF
- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 70 LITRES
- FREEZING CAPACITY 4KG/24HRS
- 4* FREEZER
- POWER CUT SAFE FOR 24 HOURS
- FREEZER PRECISION STORAGE
- 3 SOLID FRONTED FREEZER DRAWERS
- ENERGY RATING A

'A' Energy Rated
50:50 Combi Fridge Freezer

SANTO C718414i

178cm

- FRIDGE FEATURES & FUNCTIONS
- NET CAPACITY 170 LITRES
- BACTERIAL PROTECTION
- AUTO DEFROST
- ADJUSTABLE THERMOSTAT COIN/KNOB
- FRIDGE PRECISION STORAGE
- 2 SALAD CRISPERS
- 2 FULL & 2 HALF DEPTH SHELVES
- PRINTED GLASS SHELVES
- FRIDGE DOOR PRECISION STORAGE
- COVERED DAIRY COMPARTMENT
- 2 CAN SHELVES
- BOTTLE SHELF WITH BOTTLE HOLDER
- FREEZER FEATURES & FUNCTIONS
- NET CAPACITY 92 LITRES
- FREEZING CAPACITY 10KG/24HRS
- 4* FREEZER
- POWER CUT SAFE FOR 24 HOURS
- FREEZER PRECISION STORAGE
- 4 SOLID FRONTED FREEZER DRAWERS
- ENERGY RATING A

AEG

fridge freezers

'A' Energy Rated
Combi Fridge Freezer

SANTO C816414i

158cm

FRIDGE FEATURES & FUNCTIONS
NET CAPACITY 165 LITRES
BACTERIAL PROTECTION
HUMIDITY CONTROLS
AUTO DEFROST
ADJUSTABLE THERMOSTAT COIN/KNOB
MECHANICAL LED DISPLAY
FRIDGE PRECISION STORAGE
2 SALAD CRISPERS
2 FULL & 2 HALF DEPTH SHELVES
PRINTED GLASS SHELVES
FRIDGE DOOR PRECISION STORAGE
COVERED DAIRY COMPARTMENT
1 CAN SHELF WITH ALU SILVER TRIM
BOTTLE SHELF WITH BOTTLE HOLDER AND SLIDER SUPPORT
HALF WIDTH SLIDING DOOR SHELF WITH LID
FREEZER FEATURES & FUNCTIONS
NET CAPACITY 70 LITRES
FREEZING CAPACITY 8KG/24HRS
4* FREEZER
FAST-FREEZE PUSH BUTTON
FAST-FREEZE LED
POWER CUT SAFE FOR 24 HOURS
FREEZER PRECISION STORAGE
3 TRANSPARENT FREEZER DRAWERS
ENERGY RATING A

'A' Energy Rated
Combi Fridge Freezer

SANTO C714404i

145cm

FRIDGE FEATURES & FUNCTIONS
NET CAPACITY 170 LITRES
BACTERIAL PROTECTION
AUTO DEFROST
ADJUSTABLE THERMOSTAT COIN/KNOB
FRIDGE PRECISION STORAGE
2 SALAD CRISPERS
2 FULL & 2 HALF DEPTH SHELVES
PRINTED GLASS SHELVES
FRIDGE DOOR PRECISION STORAGE
COVERED DAIRY COMPARTMENT
2 CAN SHELVES
BOTTLE SHELF WITH BOTTLE HOLDER
FREEZER FEATURES & FUNCTIONS
NET CAPACITY 60 LITRES
FREEZING CAPACITY 6KG/24HRS
4* FREEZER
POWER CUT SAFE FOR 22 HOURS
FREEZER PRECISION STORAGE
2 SOLID FRONTED FREEZER DRAWERS
ENERGY RATING A

specification tables

function

FORM

PERFEKT IN FORM UND FUNKTION

AEG

PRODUCT SPECIFICATIONS BUILT-IN ELECTRIC OVENS	PRODUCT	BUILT-IN DOUBLE OVENS				BUILT-UNDER DOUBLE OVENS		BUILT-IN SINGLE OVENS							
	MODEL	D88004a D88004m	D57014a D57014m	D41014a D41014m D41014w D41014b	D21004m D21004w D21004b D21004d	U71014m U71014a	U31004m U31004w U31004d U31004b	B81394m	CB89201m CB89201a	B88714a B88714m	B57414a B57414m B57414b B57414w	B41014a B41014m B41014w B41014b	B31014m B31014w B31014b B31014d	B21004m B21004w B21004b	B11804m B11804w B11804b
OVEN FUNCTIONS (t=top, m=main)		t | m	t | m	t | m	t | m	t | m	t | m								
Ventitherm® Precision digital fan cooking		| ■	| ■						■	■					
Ventitherm® fan operated cooking				| ■	| ■		| ■	| ■	■	■		■	■	■	■
Fan assisted cooking						■ |									
Hot air fan baking		| ■							■						
Rotitherm roasting		| ■	| ■	| ■		■ | ■		■	■	■	■	■	■	■	
Conventional cooking		■ | ■	■ | ■	■ | ■	■ |	■ | ■	■ |	■	■	■	■	■			
Pizza setting		| ■	| ■	| ■		| ■		■	■	■	■	■			
Speedcook		■ | ■	| ■	| ■		| ■		■		■	■				
Fan controlled defrosting		| ■	| ■	| ■	| ■	■ | ■	| ■	■	■	■	■	■	■	■	■
80° Keep warm		■ | ■							■	■						
Full width grill[1]		■ | ■	■ F| ■	■ | ■	■ |	■ | ■	■ |	■	■	■	■	■	■	■	■
Economy grill		■ | ■	■ F|	■ | ■	■ |	■ | ■	■ |	■	■	■	■	■	■		
Base heat finishing and reheating		■ | ■						■				■				
Top heat						■ |		■							
Vigorous steaming									■							
Interval steaming									■							
OVEN FEATURES																
Oven door(s) **(Q=quadruple T=triple, D=double)**		D	D	D	D	D	D	T	T	Q	Q	T	T	T	D
Interior lights	Watts	1x25 1x20(H)	2x25	2x25	2x25	1x25 1x20(H)	2x25	2x25(H)	2x25	1x20(H) 1x40	1x40	1x40	1x40	1x25	1x25
Interior lights	Position	Sides	Sides	Sides	Sides	Sides	Sides	Sides	Side & back	Side & back	Back	Back	Back	Back	Back
Digital Controls		■	■					■	■	■	■				
Retractable controls			■	■		■		■			■	■	■		
Rotary controls					■		■							■	■
Digital display		■						■	■	■	■				
Digital Temperature Control		■	■						■	■	■				
Compact hinge		■	■	■	■	■	■	■	■	■	■	■	■	■	■
Cooling fan		■	■	■	■	■	■	■	■	■	■	■	■	■	■
Easy installation - side handles and stability feet		■	■	■	■	■	■		■	■	■	■	■	■	■
PROGRAMMER																
Fully programmable electronic clock		Both	Main	Main	Main	Main	Main	■	■	■	■	■	■	■	■
Electronic minute minder		■	■	■	■	■	■	■	■	■	■	■	■	■	■
Digital controls with menu guided cooking		■							■	■					
CLEANING																
Pyroluxe® oven cleaning[2]										■	■				
Catalytic lining / liners		■	■			■	■					■	■		
Diamond glazed enamel interior				■	■			■	■					■	■
Fold down grill				both	secondary			■						■	■
EQUIPMENT SUPPLIED																
Telescopic runners		Optional	Optional	Optional	Optional				Optional	Optional	Optional	Optional	Optional	Optional	Optional
Chrome grid runners		■	■	■	■	■	■	■	■			■	■	■	■
Chrome auto-stop non-tip shelves		1 | 3	1 | 3	1 | 2	1 | 2	2 | 2	1 | 2	1	2	3	3	2	2	2	2
Grill/meat pan		■	■	■	■	■	■	■	■	■ ■	■ ■	■ ■	■	■	■
Pizza stone and cake tray								■							
Meat probe								■	■						
INTERNAL OVEN DIM. (t=top, m=main)		t | m	t | m	t | m	t | m	t | m	t | m								
Volume (usable)	litres	31 | 53	35 | 53	28 | 51	31 | 57	35 | 49	38 | 53	69	52	51	51	51	51	51	51
Height	mm	180 | 330	200 | 330	180 | 330	180 | 350	260 | 270	260 | 290	300	315	310	310	310	310	310	310
Width	mm	420 | 420	430 | 420	420 | 420	420 | 420	345 | 445	345 | 445	580	408	405	405	405	405	405	405
Depth	mm	405 | 385	405 | 385	405 | 385	405 | 385	385 | 410	425 | 410	394	406	410	410	410	410	410	410
ENERGY INFORMATION																
Oven temperature range	°C	30-250	30-250	90-250	90-250	90-250	90-250	30-290	30-300	30-300	30-300	50-275	50-275	50-275	50-275
Energy class		B | A	A | A	B | B	B | A	A | B	A | B	B	A	A	A	A	A	A	A
Energy efficiency class in mode	Static/Fan	S | F	S | F	S | S	S | F	F | S	S | F	F	F	F	F	F	F	F	F
Cooktime standard load static	minutes	39 | 47	42 | 47	40 | 47	40 | NA	46 | 51	41 | NA	53	45	49	48	48	NA	NA	NA
Cooktime standard load fan	minutes	NA | 47	NA | 47	NA | 49	NA | 47	42 | 60	NA | 62	50	41	41	42	41	41	41	41
Energy consumption static	kW	0.71 | 0.85	0.76 | 0.85	0.71 | 0.89	0.71 | NA	0.86 | 0.98	0.77 | NA	1.50	0.87	0.87	0.89	0.89	NA	NA	NA
Energy consumption fan	kW	NA | 0.79	NA | 0.79	NA | 0.91	NA | 0.79	0.79 | 0.99	NA | 0.93	1.19	0.79	0.79	0.79	0.79	0.79	0.79	0.79
Standby power	W	1.2 | 1.2	0 | 1.1	0 | 1.1	0 | 1.1	0 | 1.1	0 | 1.1	2	4.8	2	2	1	1	1	1
ELECTRICAL CONNECTION																
Connected load	kW	5.5	6.1	6.2	5.4	6.3	6.3	3.6	3.5	3.0	3.4	3.4	3.0	3.0	3.0
Fuse rating	A	30	30	30	30	30	30	20	20	13	20	13	13	13	13
Oven/Grill power (max)	kWh	3.2/2.3	3.4/2.3	3.2/2.8	2.5/2.8	2.5/2.8	2.5/2.8	2.9/2.9	2.9/2.9	3.0/2.9	3.4/2.3	3.0/2.9	3.0/2.9	3.0/2.9	3.0/2.9
SAFETY AND INTERFERENCE SUPPRESSION																
Low Voltage Directive (LVD)		■	■	■	■	■	■	■	■	■	■	■	■	■	■
Electromagnetic Compatibility (EMC)		■	■	■	■	■	■	■	■	■	■	■	■	■	■
LITERATURE SUPPLIED																
Operation and installation instructions		■	■	■	■	■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS																
Height	mm	897	897	897	897	720	720	480	594	596	596	596	596	596	596
Width	mm	595	595	595	595	593	593	892	592	592	592	592	592	592	592
Depth	mm	547	547	547	547	550	550	556	567	567	567	567	567	567	567
Net weight	Kg	53.0	53.0	53.0	53.0	48.0	48.0	68.0	49.0	40.0	37.5	30.5	30.5	30.5	30.5
APERTURE DIMENSIONS																
Height	mm	875	875	875	875	720	720	475	590	590	590	590	590	590	590
Width	mm	560	560	560	560	600	600	860	560	560	560	560	560	560	560
Depth	mm	550	550	550	550	560	560	550	550	550	550	550	550	550	550
PACKAGING DIMENSIONS																
Height	mm	965	965	965	965	800	800	580	690	700	700	700	700	700	700
Width	mm	665	665	665	665	660	660	1110	660	660	660	660	660	660	660
Depth	mm	680	680	680	680	660	660	700	700	705	705	705	705	705	705
Gross weight	Kg	55.0	55.0	55.0	55.0	50.0	50.0	72.0	53.0	44.5	42.0	35.0	35.0	35.0	35.0

1) F = Fast grill
2) Pyroluxe® cleaning : 5.0kWh

PRODUCT SPECIFICATIONS BUILT-IN MICROWAVE OVENS	PRODUCT	MICROWAVE OVENS				
	MODEL	MCC663EM MCC663EA MCC663EB MCC663EW	MCD3534EM	MCD343EUM	MC153EM MC153EB MC153EW MC153ED	MC143EUX MC143EUA
Combi microwave, fan oven & grill		■				
Duo microwave and grill			■	■		
Solo microwave					■	■
PERFORMANCE						
Microwave Output (IEC 705)		900W	900W	750W	900W	750W
Heating Category 1)		E	E	E	E	E
Grill Output		1500W	1200W	1100W		
Convection Oven Output		1500W				
FEATURES						
Fully Built-In		■				
Microwave Power Levels		6	9	9	9	9
Hinged Grill		■				
QUARTZ grill			■			
Electronic Push Controls		8	6	5	4	4
Control Knobs		1	2	2	2	2
Electronic Clock/ Programmer		■	■	■	■	■
Turntable Off Control		■	■	■	■	■
Programme End Signal		■	■	■	■	■
Child Lock		■				
COOKING MODES						
Microwave		■	■	■	■	■
Grill		■	■	■		
Microwave & Grill		■	■	■		
Convection (Fan)		■				
Microwave & Convection		■				
Auto Defrost By Weight Programmes		4	4	4	4	4
Auto Cook By Weight Programmes			6	6	3	3
CRUNCH Function			■			
Quickstart		■	■	■	■	■
Delayed Start		■				
TECHNICAL						
Total Load Rating	kW	3.1	2.75	2.3	1.55	1.25
Fuse		13	13	13	13	13
PRODUCT DIMENSIONS						
Oven Volume	litres	30	24	17	24	17
Product Height	mm	460	310	297	310	297
Product Width	mm	592	541	440	541	440
Product Depth	mm	507	414	331	414	331
Net weight	kg	30	17	15	17	15
Built-in Kit		Included	BF246	BF175/BF176/UMS17	BF246	BF175/BF176/UMS17
Frame Height	mm		460	360 360	460	360 360
Frame Width	mm		592	492 592	592	492 592
Frame Depth	mm		22	22 22	22	22 22
APERTURE DIMENSIONS 2)				**3) 4)**		**3) 4)**
Height	mm	450	450	350 350	450	350 350
Width	mm	560	560	460 560	560	460 560
Depth	mm	500	500	320 320	500	310 310
PACKAGING DIMENSIONS						
Height	mm	552	391	348	391	348
Width	mm	660	602	492	602	492
Depth	mm	620	486	400	486	400
Gross Weight	kg	36.0	19.0	17.0	19.0	17.0

1) Heating category of the microwave oven in line with government guidelines
2) Installation aperture dimensions, for full details refer to installation guidelines
3) Installation into 50cm wide wall cupboard
4) Installation into 60cm wide tall housing unit

PRODUCT SPECIFICATIONS HOBS	PRODUCT	GAS HOBS							
	MODEL	99852Gm 99852Ga	79852Gm 79852Ga	957552Gbm	69802Gm 69802Ga	34942Gm	35772Gm	34602Gm 34602Gw 34602Gb	21602Gm 21602Gw 21602Gd 21602Gb
HOB FEATURES									
Number of cooking zones		5	5	5	4	5	5	4	4
Ignition type		Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated
Control position		Front	Front	Front	Side	Side	Front	Side	Side
Cast iron wok support		■	■			■	■		
Cast iron pan supports		■	■	■	■	■	■	■	
Safety thermocouples		■	■	■	■				
Stability fingers per burner		4	4	4	4	6	6	6	7
Stability feet		■	■	■	■	■	■	■	■
ZONE SPECIFICATION									
Front left spec 1)		SR	SR	SR	R	R	S	R	R
Front left rating 2)	kWh	1.9	1.9	1.9	2.9	3.0	1.0	3.0	3.0
Front left diameter	mm	62	62	62	98	98	48	98	98
Front right spec 1)		S	S	S	S	S	SR	S	S
Front right rating 2)	kWh	1.0	1.0	1.0	1.0	1.0	2.0	1.0	1.0
Front right diameter	mm	48	48	48	48	48	62	48	48
Rear left spec 1)		SR	SR	SR	SR	SR	R	SR	SR
Rear left rating 2)	kWh	1.9	1.9	1.9	1.9	2.0	3.0	2.0	2.0
Rear left diameter	mm	62	62	62	62	62	98	62	62
Rear right spec 1)		SR	SR	SR	SR	SR	SR	SR	SR
Rear right rating 2)	kWh	1.9	1.9	1.9	1.9	2.0	2.0	2.0	2.0
Rear right diameter	mm	62	62	62	62	62	62	62	62
Middle front spec 1)		TC	TC	R		TC	TC		
Middle front rating 2)	kWh	3.9	3.9	2.9		4.0	4.0		
Middle front diameter	mm	120	120	92		120	110		
Total rating (max.) 2)	kWh	10.6	10.6	9.6	7.7	12.0	12.0	8.0	8.0
ELECTRICAL CONNECTION									
Fuse rating	A	3	3	3	3	3	3	3	3
SAFETY AND INTERFERENCE SUPPRESSION									
Low Voltage Directive (LVD)		■	■	■	■	■	■	■	■
Electromagnetic Compatability (EMC)		■	■	■	■	■	■	■	■
Gas Directive		■	■	■	■	■	■	■	■
LITERATURE SUPPLIED									
Operation and installation instructions		■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS									
Height (above worktop)*	mm	40	40	12	40	30	15	30	30
Width	mm	880	680	740	580	860	680	580	580
Depth	mm	510	510	520	510	500	510	500	500
Net weight	Kg	16.6	15.6	15.6	11.1	15.1	11.1	8.2	8.2
APERTURE DIMENSIONS									
Height	mm	30	30	30	30	30	30	30	30
Width	mm	830	560	560	550	830	560	550	550
Depth	mm	480	480	480	470	470	480	470	470
PACKAGING DIMENSIONS									
Packaged height	mm	150	150	150	150	120	150	120	120
Packaged width	mm	990	790	790	660	950	790	670	670
Packaged depth	mm	620	620	620	600	600	620	600	600
Gross weight	Kg	17.3	16.3	16.3	11.7	15.8	11.7	8.8	8.8

1) S=Simmer burner; R=Rapid burner; SR=Semi-Rapid; TC=Triple Crown
2) For gas conversion purpose 3.450 BTU = 1kW
*Hob height: is height above worktop only

PRODUCT SPECIFICATIONS HOBS	PRODUCT	INDUCTION HOBS		CERAMIC HOBS							SEALED PLATE HOBS
	MODEL	68001KFn	67600KFn	96901KFEn	76301KFn	79301KFn	66300KFan	66201KFn	6410KFn	C6010Kmn C6010Kbn	111Km 111Kw 111Kd
HOB FEATURES											
Number of cooking zones		4	4	5	4	4	4	4	4	4	4
Control position		Front	Front	Front	Front	Split sides	Front	Front	Front	Side	Side
Control type		Touch Controls	Touch Controls	Touch Controls	Touch Controls	Touch Controls	Touch Controls	Touch Controls	Touch Controls	Rotary	Rotary
Residual heat / hob on indicator		■	■	■	■	■	■	■	■	■	■
Electronic timer		■	■	■	■	■	■	■			
Child lock		■	■	■	■	■	■	■	■		
Function lock		■	■	■							
Auto Safety Switch-off		■	■	■	■	■	■	■			
No of booster zones		4	1								
Stop+Go		■		■	■	■	■	■			
Automatic booster				■	■	■	■	■			
Pot recognition sensors		■	■								
ZONE SPECIFICATION											
Front left spec 1)		I	I	HI	Triple HI	Triple HI	Triple HI	Triple HI	Dual HI	Dual HI	F
Front left rating	kWh	2.2+0.8	2.2+0.8	1.8	2.3/1.6/0.8	2.3/1.6/0.8	2.3/1.6/0.8	2.3/1.6/0.8	2.2/0.75	2.2/0.75	2.0
Front left diameter	mm	210	210	180	210/175/120	210/175/120	210/175/120	210/175/120	210/120	210/120	180
Front right spec 1)		I	I	HI	HI	HI	HI	HI	HI	HI	F
Front right rating	kWh	1.8+0.5	1.4	1.8	1.2	1.8	1.2	1.2	1.2	1.2	1.5
Front right diameter	mm	180	145	180	145	180	145	145	145	145	145
Rear left spec 1)		I	HI	HI	HI	HI	HI	HI	HI	HI	F
Rear left rating	kWh	1.8+0.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.5
Rear left diameter	mm	180	145	145	145	145	145	145	145	145	145
Rear right spec 1)		I	Multi HI	Multi HI	Multi HI	Multi HI	Multi HI	Dual HI	HI	HI	F
Rear right rating	kWh	1.2+0.3	2.4/1.5	2.2/1.4	2.4/1.5	2.2/1.4	2.4/1.5	1.7/0.7	1.8	1.8	2.0
Rear right diameter	mm	145	170x265	170x265	170x265	170x265	170x265	180/120	180	180	180
Middle front spec 1)				Triple HI							
Middle front rating	kWh			1.05/1.95/2.7							
Middle front diameter	mm			145/210/270							
ELECTRICAL CONNECTION											
Total rating (max.)	kWh	7.3	7.2	7.9	7.1	7.5	7.1	6.4	6.4	6.4	7.0
Fuse rating	A	30	30	30	30	30	30	30	30	30	30
SAFETY AND INTERFERENCE SUPPRESSION											
Low Voltage Directive (LVD)		■	■	■	■	■	■	■	■	■	■
Electromagnetic Compatability (EMC)		■	■	■	■	■	■	■	■	■	■
LITERATURE SUPPLIED											
Operation and installation instructions		■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS											
Height (above worktop)	mm	4*	4*	4*	4*	4*	5*	4*	4*	4*	8
Width	mm	590	590	1029	780	720	605	590	590	570	580
Depth	mm	520	520	519	520	520	535	520	520	500	500
Appliance weight	Kg	11.1	11.1	12.5	10.5	10.3	9.5	7.6	7.6	8.0	11.9
APERTURE DIMENSIONS											
Height	mm	51	51	43	43	43	55	43	43	43	30
Width	mm	560	560	995	750	680	560	560	560	560	550
Depth	mm	490	490	490	490	490	490	490	490	490	470
PACKAGING DIMENSIONS											
Packaged height	mm	115	115	115	125	130	130	115	110	110	120
Packaged width	mm	690	680	1105	995	795	655	680	665	665	670
Packaged depth	mm	575	575	575	645	595	615	575	570	570	600
Packaged weight	Kg	12.0	12.0	14.0	11.4	9.5	10.0	8.4	8.5	9.0	12.5

1) HI=HILIGHT zone; I=Induction; F=Fast plate
* Hob height: is height above worktop only

PRODUCT SPECIFICATIONS FRONT-LINE	PRODUCT	FUTURE-GAS			
	MODEL	FM4300Gan *2 burner gas*	FM6300Gan *4 burner gas*	FM7300Gan *4 burner gas*	FM4360Gan *Wok burner*
SPECIFICATION					
Fuel Type		Natural Gas	Natural Gas	Natural Gas	Natural Gas
LPG conversion kit		Included	Included	Included	Included
Rotary knobs / Touch controls		Rotary	Rotary	Rotary	Rotary
HOB SPECIFICATION					
No. of cooking zones		2	4	4	1
ZONE SPECIFICATION					
Front left spec 2		SR	SR	SR	Triple Crown
Front left rating 3	kWh	2	2	2	3.8
Front left diameter	cm	7.4	7.4	7.4	13
Front right spec 2			S	S	
Front right rating 3	kWh		1	1	
Front right diameter	cm		5.8	5.8	
Rear left spec 2		R	R	R	
Rear left rating 3	kWh	3	3	3	
Rear left diameter	cm	10.4	10.8	10.8	
Rear right spec 2			SR	SR	
Rear right rating 3	kWh		2	2	
Rear right diameter	cm		7.4	7.4	
Grill rating	kWh				
Fryer rating	kWh				
Pot sensors					
Gas safety shut off		■	■	■	■
EXTRACTOR SPECIFICATION					
Fan speeds					
No. of Motor					
Speed control					
Intensive setting					
Hob illumination	W				
Extraction/ recirculation operation					
Metal grease filter					
Ventilation hose diameter	cm				
Charcoal filter					
PERFORMANCE DATA					
Extraction maximum	ca.m3/h				
Extraction intensive	ca.m3/h				
Recirculation maximum	ca.m3/h				
ELECTRICAL CONNECTION					
Voltage	V	230/240	230/240	230/240	230/240
Electrical connection	Hz	50*	50*	50*	50*
Total rating	kWh	5	8	8	3.8
Cable length	cm	200	200	200	200
SAFETY AND INTERFERENCE SUPPRESSION					
Low Voltage Directive (LVD)		■	■	■	■
Electromagnetic Compatability (EMC)		■	■	■	■
Gas Directive		■	■	■	■
LITERATURE SUPPLIED					
Operation and installation instructions		■	■	■	■
APPLIANCE DIMENSIONS					
Height above worktop	mm	11	11	11	11
Overall Height	mm	66	66	66	66
Width	mm	360	580	720	360
Depth	mm	520	520	520	520
Net Weight	Kg	7.0	11.0	11.0	8.0
APERTURE DIMENSIONS 1)					
Height	mm	55	55	55	55
Width	mm	340	560	700	340
Depth	mm	490	490	490	490
PACKAGING DIMENSIONS					
Height	mm	185	185	185	200
Width	mm	430	650	790	430
Depth	mm	580	580	580	580
Gross weight	Kg	8	12	12	9

1) Refer to installation diagrams if installing more than one Front-Line unit or if installing a gas unit.
*Electrical supply is for ignition only.

PRODUCT SPECIFICATIONS FRONT-LINE	PRODUCT	FUTURE-ELECTRIC										
	MODEL	FM4513Kan *2 zone ceramic*	FM6520Kan *4 zone ceramic*	FM7531Kan *4 zone ceramic*	FM4803Kan *2 zone induction*	FM7803Kan *4 zone induction*	FM4500GRa *Barbecue grill*	FM6000LDa *Lift door*	FM2500DDa *Down-draught*	HD8890a *Chimney wall hood*	HD8820a *Chimney wall hood*	HI8820a *Chimney island hood*
SPECIFICATION												
Fuel Type		Electric	Electric	Electric	Electric	Electric	Electric		Electric	Electric	Electric	Electric
LPG conversion kit												
Rotary knobs / Touch controls		Touch	Touch	Touch	Touch	Touch	Touch		Touch	Touch	Touch	Touch
HOB SPECIFICATION												
No. of cooking zones		2	4	4	2	4	1					
ZONE SPECIFICATION												
Front left spec 2		Dual HI	HI	Dual HI	Induction	Induction						
Front left rating 3	kWh	0.7/1.7	1.2	0.7/1.7	2.2/3.0	1.4						
Front left diameter	cm	12.0/18.0	14.0	12.0/18.0	21.0	14.0						
Front right spec 2			Dual HI	Triple HI		Induction						
Front right rating 3	kWh		1.0/2.2	0.8/1.6/2.3		2.2/3.0						
Front right diameter	cm		14.0/21.0	12.0/17.5/21.0		21.0						
Rear left spec 2		HI	Dual HI	Dual HI	Induction	Induction						
Rear left rating 3	kWh	1.2	0.7/1.7	0.7/1.7	1.4	1.8/2.3						
Rear left diameter	cm	14.0	12.0/18.0	12.0/18.0	14.0	18.0						
Rear right spec 2			HI	HI		Induction						
Rear right rating 3	kWh		1.2	1.2		1.4						
Rear right diameter	cm		14.0	14.0		14.0						
Grill rating	kWh						2.3					
Fryer rating	kWh											
Pot sensors				■	■	■						
Gas safety shut off												
EXTRACTOR SPECIFICATION												
No. of Motor									1	1	1	1
Fan speeds									4	4	4	4
Speed control									Electronic	Electronic	Electronic	Electronic
Intensive setting									■	■	■	■
Hob illumination	W									2x20 halogen	4x20 halogen	4x20 halogen
Extraction/ recirculation operation									■ / ■	■ / ■	■ / ■	■ / ■
Metal grease filter									■	2	3	3
Ventilation hose diameter	cm								12	15	15	15
Charcoal filter									Optional	Included	Included	Included
PERFORMANCE DATA												
Extraction maximum	ca.m3/h								345	490	490	490
Extraction intensive	ca.m3/h								480	570	570	570
Recirculation maximum	ca.m3/h								335	370	370	370
ELECTRICAL CONNECTION												
Voltage	V	(230)/ 240	(230)/ 240	(230)/ 240	230/ 240	230/ 240	230/ 240		230/ 240	220/ 240	220/ 240	220/ 240
Electrical connection	Hz	50	50	50	50	50	50		50	50/ 60	50/ 60	50/ 60
Total rating	kWh	2.9	6.3	6.9	3.6	7.2	2.3		0.29	0.215	0.255	0.255
Cable length	cm					150	200			150	150	150
SAFETY AND INTERFERENCE SUPPRESSION												
Low Voltage Directive (LVD)		■	■	■	■	■	■		■	■	■	■
Electromagnetic Compatability (EMC)		■	■	■	■	■	■		■	■	■	■
Gas Directive												
LITERATURE SUPPLIED												
Operation and installation instructions		■	■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS												
Height above worktop	mm	11	11	11	11	11	11		11/ 111/ 211	500**	500**	500**
Overall Height	mm	49	49	49	49	49	111	458	611	685-1134***	685-1134***	813-1100
Width	mm	360	580	720	360	720	360	592	180	898	1198	1198
Depth	mm	520	520	520	520	520	520	20	520	460	460	698
Net Weight	Kg	6.0	11.0	11.0	7.0	11.0	9.0	7.0	16.0	20.2	23.8	35.0
APERTURE DIMENSIONS 1)												
Height	mm	38	38	38	38	49	100	450	600			
Width	mm	340	560	700	340	700	340	560	160			
Depth	mm	490	490	490	490	490	490	550	490			
PACKAGING DIMENSIONS												
Height	mm	170	180	180	170	170	277	140	225	630	650	595
Width	mm	430	640	790	430	790	404	660	560	980	1280	1325
Depth	mm	580	580	580	580	580	602	540	710	610	630	780
Gross weight	Kg	7	12	12	8	12	12.9	8	18.5	29	34	48

1) Refer to installation diagrams if installing more than one Front-Line unit or if installing a gas unit.
* Electrical supply is for ignition only
** Height quoted is for installation above an electric hob, for a gas hob, the height is 650mm
*** Height dimension is for extraction mode, for recirculation, height is 772-1230mm

PRODUCT SPECIFICATIONS FRONT-LINE	PRODUCT	CLASSIC							
	MODEL	C6531DGm *2 burner gas*	C6562Gm *4 burner gas*	C3531WKm *Wok burner*	C6310DKm *2 zone ceramic*	C6310Km *4 zone ceramic*	C231GRm *Ceramic grill*	C130FGm *Grill/Fryer*	C115DDm *Down-draught*
Fuel Type		Natural Gas[4]	Natural Gas[4]	Natural Gas[4]	Electric	Electric	Electric	Electric	Electric
LPG conversion kit		Optional	Optional						
Rotary knobs / Touch controls		Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
HOB SPECIFICATION									
No. of cooking zones		2	4	1	2	4	1	2	
Zone specification									
Front left spec 2		SR	R	Triple Crown	HI	Dual HI			
Front left rating 3	kWh	1.9	3	3.9	1.2	0.7/ 1.7			
Front left diameter	cm	7.2	10.2	13.5	14	12.0/ 18.0			
Front right spec 2			SR			HI			
Front right rating 3	kWh		1.9			1.2			
Front right diameter	cm		7.2			14			
Rear left spec 2		R	SR		Dual HI	HI			
Rear left rating 3	kWh	3	1.9		0.7/ 1.7	1.2			
Rear left diameter	cm	10.2	7.2		12.0/ 18.0	14			
Rear right spec 2			S			HI			
Rear right rating 3	kWh		1			2.3			
Rear right diameter	cm		5.5			21			
Grill rating	kWh						1.5	2x 1.15	
Fryer rating	kWh							2.0	
Pot sensors									
Gas safety shut off		■	■	■					
EXTRACTOR SPECIFICATION									
No. of Motor									1
Fan speeds									2
Speed control									Variable
Intensive setting									■
Hob illumination	W								
Extraction/ recirculation operation									■ / -
Metal grease filter									■
Ventilation hose diameter	cm								12.5
Charcoal filter									
PERFORMANCE DATA									
Extraction maximum	ca.m3/h								370
Extraction intensive	ca.m3/h								370
Recirculation maximum	ca.m3/h								
ELECTRICAL CONNECTION									
Voltage	V	230/ 240	230/ 240	230/ 240	(230)/ 240	(230)/ 240	(230)/ 240	(230)/ 240	230/ 240
Frequency	Hz	50*	50*	50*	50	50	50	50	50
Total rating	kW	5	8	5	2.9	6.4	1.5	2.3	0.09
Cable length	cm	200	200	200				150	200
SAFETY AND INTERFERENCE SUPPRESSION									
Low Voltage Directive (LVD)		■	■	■	■	■	■	■	■
Electromagnetic Compatability (EMC)		■	■	■	■	■	■	■	■
Gas Directive		■	■	■					
LITERATURE SUPPLIED									
Operation and installation instructions		■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS									
Height above worktop	mm	11	11	11	11	11	11	11	11
Overall Height	mm	56	56	56	56	56	56	355	611
Width	mm	290	580	290	290	580	290	290	145
Depth	mm	510	510	510	510	510	510	510	510
Net Weight	Kg	5.0	12.0	7.0	6.0	11.0	7.0	17.0	12.0
APERTURE DIMENSIONS [1]									
Height	mm	45	45	45	45	45	45	245	600
Width	mm	270	560	270	560	270	270	270	132
Depth	mm	490	490	490	490	490	490	490	490
PACKAGING DIMENSIONS									
Height	mm	180	180	185	180	180	180	320	700
Width	mm	360	650	380	360	640	360	370	200
Depth	mm	580	600	580	590	590	590	610	550
Gross weight	Kg	6	13	8	7	12	8	18	13

1) Refer to installation diagrams if installing more than one Front-Line unit or if installing a gas unit.
* Electrical supply is for ignition only
** Height quoted is for installation above an electric hob, for a gas hob, the height is 650mm
*** Height dimension is for extraction mode, for recirculation, height is 772-1230mm
2) HI = HILIGHT plate, S = Simmer burner, R = Rapid burner, SR = Semi-Rapid burner
3) For gas conversion purpose 3.450 BTU = 1kW
4) Can be installed above cupboards or ovens (installation kit NOT required). Installation above a drawer is not recommended

PRODUCT SPECIFICATIONS COOKER HOODS	PRODUCT	ISLAND HOOD	CHIMNEY HOODS									
	MODEL	Hi8610m	HD8694m	C2060Dm	C2020Dm	HD8990m HD8990ad	HD8960m HD8960ad	HD6470m	HC5690m	HC3360m	CH700X	CH600K CH900K
SPECIFICATION												
Number of motors		2	1	2	1	1	1	1	1	1	1	1
Fan speeds		4	4	4	3	4	4	3	4	3	4	3
Electronic speed control		■	■	■	■	■	■	■	■		■	■
Intensive setting		■	■	■		■	■		■		■	
Hob illumination (H=Halogen)	Watts	4x20 H	2x20 H	4x20 H	2x20 H	2x20 H	2x20 H	2x20 H	2x20 H	2x20 H	2x20 H	2x40
Extraction / recirculation operation		■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■
Saturation indication						■	■					
Metal grease filter(s)		■	■	■	■	■	■	■	■	■	■	■
INSTALLATION HEIGHT FROM:												
Electric hob	mm	500	600	600	650	500	500	500	500	500	600	600
Gas hob	mm	700	700	700	700	650	650	650	650	650	700	700
PERFORMANCE DATA:												
Extraction ca.m3/h	max	410	680	320	550	340	340	470	510	370	380	430
Extraction ca.m3/h	intensive	500	750	520		570	570		650		420	
Recirculation ca.m3/h	max	285	240	275	330	270	270	270	390	320	240	265
Noise (max. setting)	extraction dB(A)	59	69	55	60	59	59	64	62	60	64	62
	recirculation dB(A)	67	70	67	61	65	65	67	70	66	70	66
ADDITIONAL EQUIPMENT REQUIRED:												
For ducting: Ventilation hose and wall box		■	■	■	■	■	■	■	■	■	■	■
Ventilation hose diameter **	mm	150#	150#	150#	120	150#	150#	150#	150#	150#	150#	120
For recirculation: Charcoal Filter		KF20	TYPE 160	L/L	EFF71	KF20	KF20	KF20	L/L	L/L	TYPE 160	Incl
ELECTRICAL CONNECTION												
Connected load	Watts	240	340	210	180	170	170	200	195	195	210	230
Fuse rating	A	13	13	13	13	13	13	13	13	13	13	13
SAFETY AND INTERFERENCE SUPPRESSION												
Low Voltage Directive (LVD)		■	■	■	■	■	■	■	■	■	■	■
Electromagnetic Compatibility (EMC)		■	■	■	■	■	■	■	■	■	■	■
LITERATURE SUPPLIED												
Operation and installation instructions		■	■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS 1)												
Height of extraction	mm	800-1080	785-1200	810-1265	675-1075	640-1050	640-1050	660-1120	820-1275	800-1225	785-1200	875/1116
Height of recirculation (if different)	mm			810-1360		720-1140	720-1140	775-1225	820-1370	800-1350		
Width	mm	1000	898	898	898	898	598	600-800	898	598	698	599/899
Depth	mm	650	505	500	500	450	450	500	480	470	505	515
Net Weight	Kg	33.1	15.7	21.4	19.0	20.2	20.2	15.0	16.9	14.9	15.7	11.1/11.7
PACKAGING DIMENSIONS												
Height	mm	565	975	605	660	610	610	540	580	590	800	620/620
Width	mm	1070	520	980	1115	980	680	980	1010	760	550	760/995
Depth	mm	780	615	610	520	610	610	610	590	630	625	390/390
Gross Weight	Kg	45.4	19.5	30.0	23.3	28.4	28.4	21.2	22.0	22.3	19.5	13.7/14.6

1) For installation aperture dimensions see installation instructions
120mm outlet adaptor included
** CDK5F
120mm (5") diameter flexible ducting kit. 1 metre length. 100mm (4") reduction collar included. For use with all AEG hoods up to 1 metre ducting.
CDK5FR
120mm (5") diameter ducting kits for ducting of hoods situated away from exterior wall, up to 3 metres. 100mm (4") reduction collar included. For use with all AEG hoods.
L/L= Longlife

PRODUCT SPECIFICATIONS — PRODUCT
COOKER HOODS

MODEL		PROFESSIONAL HOODS		DESIGNER HOODS		FRONTLINE HOODS			TELESCOPIC HOOD	CANOPY HOODS				INTEGRATED HOODS		STANDARD HOODS	
		CHDD8509m	CHDD8510m	HD8795m	HD8760m	HD8820a	HD8890a	Hi8820a	CH6951x	HL7275m	C570Dm	HL4150ml	C502Dml	HE6260ml	HE3160ml	HU4360m	HU3360w HU3360d
SPECIFICATION																	
Number of motors		2	2	1	1	1	1	1	1	1	1	1	2	2	1	1	1
Fan speeds		3	3	4	4	4	4	4	3	4	Variable	3	3	Variable	3	3	3
Electronic speed control				■	■	■	■	■		■	■			■			
Intensive setting				■	■	■	■	■	■	■	■			■			
Hob illumination (Halogen)	Watts	2x20 H	2x20 H	3x20 H	3x20 H	4x20 H	2x20 H	4x20 H	2x20 H	2x20	1x11ǂ	2x40	1x40	2x40	2x40	1x40	1x40
Extraction / recirculation operation		■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■
Saturation indication				■	■	■	■	■									
Metal grease filter(s)		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
INSTALLATION HEIGHT FROM:																	
Electric hob	mm	650	650	300	300	500	500	500	400	500	650	600	600	600	600	500	500
Gas hob	mm	750	750	300	300	650	650	650	650	700	700	700	700	700	700	700	700
PERFORMANCE DATA																	
Extraction ca.m3/h	max	790	790	450	450	490	490	490	390	440	350	285	210	365	240	225	225
Extraction ca.m3/h	intensive			540	540	570	570	570	600	610	440			430			
Recirculation ca.m3/h	max	420	420	360	360	370	370	370	350	320	270	190	133	226	170	64	64
Noise (max. setting)	extraction dB(A)	69	69	59	59	63	63	63	55	69	65	65	66	64	62	62	62
	recirculation dB(A)	73	73	69	69	67	67	67	57	70	68	65	66	69	65	63	63
ADDITIONAL EQUIPMENT REQUIRED:																	
For ducting: Ventilation hose and wall box		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Ventilation hose diameter **	mm	150#	150#	150#	150#	150#	150#	150#	125	150#	120	120	120	120	100	125	125
For recirculation: Charcoal Filter		KF20	KF20	KF14	KF14	KF20	KF20	KF20	Incl	TYPE 200	CAKLF	L/L	CAKFPLUS	L/L	L/L	KF10	KF10
Electrical connection																	
Connected load	Watts	320	320	235	235	255	215	255	310	240	197	220	160	330	280	160	160
Fuse rating	A	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13
SAFETY AND INTERFERENCE SUPPRESSION																	
Low Voltage Directive (LVD)		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Electromagnetic Compatibility (EMC)		■	■	■	■	■	■	■	■	■	■	■	■	■	■		
Literature supplied																	
Operation and installation instructions		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS 1)																	
Height of extraction	mm	740-977	740-977	1230-1500	1230-1500	685-1134	685-1134	813-1100	450	252	302	142	139	400	400	132	132
Height of recirculation (if different)	mm	740-1230	740-1230	800	800	772-1230	772-1230										
Width	mm	900	1000	900	598	1198	898	1198	596	724	548	548	524	598	598	598	598
Depth	mm	515	515	335	330	460	460	698	300	289	302	302	289	270	270	510	510
Net Weight	Kg	18	21	27.3	25.2	23.8	20.2	35.0	12.1	6.8	8.8	6.3	4.1	11.6	9.9	5.2	5.2
PACKAGING DIMENSIONS																	
Height	mm	680	680	428	430	650	630	595	500	350	390	370	355	550	550	563	563
Width	mm	1200	1330	1001	880	1280	980	1325	660	780	620	620	585	720	720	647	647
Depth	mm	715	715	880	720	630	610	780	390	350	370	220	215	395	395	178	178
Gross Weight	Kg	25.0	27.0	34.5	30.5	34.0	29.0	48.0	13.6	8.0	10.4	7.4	4.6	13.2	11.5	6.3	6.3

1) For installation aperture dimensions see installation instructions
120mm outlet adaptor included
** CDK5F
120mm (5") diameter flexible ducting kit. 1 metre length. 100mm (4") reduction collar included. For use with all AEG hoods up to 1 metre ducting.
CDK5FR
120mm (5") diameter ducting kits for ducting of hoods situated away from exterior wall, up to 3 metres. 100mm (4") reduction collar included. For use with all AEG hoods.
L/L = Longlife
ǂ= 11 Watt neon light

PRODUCT SPECIFICATIONS — PRODUCT
COFFEE MACHINES

MODEL		COFFEE MACHINES		
		Coffee Machine PE8038m	Accessory Drawer PES8038m	Mobile Modular Unit PBM8036m
TECHNICAL DATA				
Connected Load	kW	1.15		
Fuse Rating	Amps	13		
Lamp		20w Halogen		
Working Pressure	Bar	12		
PRODUCT DIMENSIONS				
Product Height	mm	378	68-72	1475
Product Width	mm	594	594	600
Product Depth	mm	260	445	560
Net weight	kg	17.5	6.8	20
APERTURE DIMENSIONS				
Height	mm	450		
Width	mm	563		
Depth	mm	600		
PACKAGING DIMENSIONS				
Height	mm	465	135	1475
Width	mm	670	645	600
Depth	mm	605	620	560
Gross Weight	kg	20.0	10.0	25.0

PRODUCT SPECIFICATIONS — PRODUCT
DISHWASHING

MODEL		F88070i	F65070i	F44070i	F65070U	F88070Vi	F86070Vi	F44070Vi	F64070ViL	F64570Vi	F84470Vi	F45250Vi
Capacity (number of IEC place settings)		12	12	12	12	12	12	12	12	11	9	6
CONTROLS												
Design		Semi-integrated	Semi-integrated	Semi-integrated	Built under	Fully Integrated	Fully Integrated	Fully Integrated	Extra Height Fully Integrated	In-column Fully Integrated	Slimline Fully Integrated	Compact Fully Integrated
Sensorlogic / Auto Load Adjustment		■	■		■	■	■		■	■	■	
LCD Display with push button digital controls		■				■						
Programme selection buttons			■	■	■		■	■	■	■	■	■
LED programme progress indicator				■								
Time to programme end display		■	■		■	■	■		■		■	
Programme end buzzer						■	■	■	■		■	■
Red beam - SpotLight						■	■		■		■	
Delay Start		■	■	■	■	■	■	■	■	■	■	■
Salt refill indicator		■	■	■	■	■	■	■	■	■	■	■
Rinse aid refill indicator		■	■	■	■	■	■	■	■	■	■	■
3 in 1 setting		■	■	■	■	■	■		■	■	■	
PROGRAMMES												
Number of programmes		8	5	4	5	8	6	4	4	4	4	5
Number of temperature options		5	4	3	4	5	5	4	4	3	4	5
Intensive Care 70°C wash		■	■	■	■	■	■	■	■	■	■	
Intensive 70°C wash												■
Normal 65°C wash		■		■		■		■	■			
AUTOMATIC 50-65		■	■		■	■	■		■	■	■	
EAT LOAD GO - Quick30 minute		■	■	■	■	■	■	■	■	■	■	
ECO Energy Saving 55										■		■
ECO 50°C wash		■	■	■	■	■	■	■				■
Normal 50°C wash		■				■			■		■	
Glass-care 45°C wash		■	■		■	■	■					
Glass 40°C wash												■
Prerinse		■				■	■					
Drying with hidden heater		Turbo	Turbo	Condenser	Turbo	Turbo	Turbo	Condenser	Turbo	Condenser	Turbo	Residual
INTERIOR												
Interior light		■				■						
Upper basket height adjustable (full load)		■	■	■	■	■	■	■	■	■	■	
Foldable Cupshelves		4	4	2	4	4	4	4	4	2	3	
Long stem wine glass holder		■				■	■					
Adjustable Glass Support		■	■	■	■	■	■	■	■	■	■	■
Foldable Bottom Plate Supports		4	4	2	2	4	4	2	4	2 & 2 removable	2	
Cutlery basket		Foldable	■	■	■	Foldable	Foldable	■	■	■	Foldable	■
Long Knife tray		■				■				■		
Automatic rinse aid dispenser		■	■	■	■	■	■	■	■	■	■	■
Automatic detergent dispenser		■	■	■	■	■	■	■	■	■	■	■
Water Sensor		■	■		■	■	■		■	■	■	
Water Softener		■	■	■	■	■	■	■	■	■	■	■
Aqua Control		■	■	■	■	■	■	■	■	■		
Anti flood Device (other)		■	■	■	■	■	■	■	■	■	■	■
Stainless steel interior		■	■	■	■	■	■	■	■	■	■	
INSTALLATION FEATURES												
Cold water fill		■	■	■	■	■	■	■	■	■	■	■
Water pressure min/max (bar)		1/10	1/10	1/10	1/10	1/10	1/10	1/10	0.5/8	1/10	0.5/8	1/10
Counterbalanced door		■	■	■	■	■	■	■	■	■	■	■
Double fulcrum hinge									■			
Drawer-line adjustment		30mm	30mm	30mm								
Worktop steam protection		Metal	Metal	Metal	Metal	Metal	Metal	Metal	Metal		Metal	
Top & side fixing brackets		■	■	■	■	■	■	■	■		■	
Recessed plinth		■	■	■	■	■	■	■	■		■	
Feet - 4 (front adjustment block)		■	■	■	■	■	■	■	3		3	
ENERGY EFFICIENCY INFORMATION												
Energy efficiency class***		A	A	A	A	A	A	A	A	A	A	A
Energy consumption (kWh)*		1.05	1.05	1.05	1.05	1.05	1.05	1.05	1.05	1.00	0.8	0.63
Wash performance***		A	A	A	A	A	A	A	A	A	A	A
Drying performance***		A	A	B	A	A	A	B	A	A	A	B
Noise dB(A) to IEC 704-3		41	45	48	45	41	43	48	48	43	47	45
Programme time (mins)****		150	150	150	150	150	150	150	150	150	160	150
Water consumption	(litres/cycle)	14	15	16	15	14	14	16	15	15	13	7
Average annual energy consumption (kWh/year)**		231	231	231	231	231	231	231	231	220	176	139
Average annual water consumption (litres/year)**		3080	3300	3520	3300	3080	3080	3520	3300	3300	2860	1540
ELECTRICAL CONNECTION												
Connected load	kW	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.25	2.2	1.08
Fuse rating	amps	13	13	13	13	13	13	13	13	13	13	13
PRODUCT DIMENSIONS												
Height	mm	815/880	815/880	815/880	815/880	815/880	815/880	815/880	868/948	759	818/878	446
Width	mm	596	596	596	596	596	596	596	596	546	446	546
Depth	mm	570	570	570	570	546	546	546	546	555	555	480
Net Weight	kg	44.4	40.4	40.4	40.4	44.4	44.4	44.4	44.4	43.3	49.5	20
APERTURE DIMENSIONS												
Height	mm	820/880	820/880	820/880	820/880	820/880	820/880	820/880	870/950	762	820/880	450
Width	mm	600	600	600	600	600	600	600	600	560	450	560
Depth	mm	600	600	600	600	600	600	600	600	570	600	500
FURNITURE DOOR DIMENSIONS					^ Included				^ FI55m		^ FIC-m, FIC-a	
Height	mm	590 max	590 max	590 max		644-714	644-714	644-714	694-774	770	644-714	460 min
Width	mm	596	596	596		596	596	596	596	596	446	596
Weight	kg	2.0-7.5	2.0-7.5	2.0-7.5		2.0-7.5	2.0-7.5	2.0-7.5	2.0-7.5	2.0-10.0	2.0-6.0	2.0-5.0
PACKAGING DIMENSIONS												
Height	mm	860	860	860	860	860	860	860	960	844	910	513
Width	mm	665	665	665	665	665	665	665	665	612	500	606
Depth	mm	705	705	705	705	705	705	705	680	670	680	577
Gross Weight	kg	49.0	45.0	45.0	45.0	49.0	49.0	49.0	49.0	53.5	36.1	23.0

*Energy consumption is stated in kWh per standard test cycle, using cold water fill.

Actual consumption will depend on how the appliance is used.

** Estimated annual consumption based on 220 washing cycles.

***Models with an 'A' rated classification offer a higher performance than those with a 'G' rating.

**** Time taken for a standard test cycle, using cold water fill.

^Stainless steel door available to suit.
^^ AluTec door available to suit.

PRODUCT SPECIFICATIONS LAUNDRY

PRODUCT / MODEL		L10505VI	L14500VI	L12700VIT	L14700VIT
CONTROLS					
Single Knob for programme selection		■	■	■	■
No. of push buttons for additional features		9	9	9	9
Delay Start		■	■	■	■
Programme progress indicator		■	■	■	■
LED timer display		■	■	■	■
WASH PROGRAMMES FOR:					
Cottons/Linens	up to 95°C	■	■	■	■
Easy care colourfast	up to 95°C	■	■	■	■
Cottons/Linens colourfast	up to 60°C	■	■	■	■
Easy care synthetics	up to 60°C	■	■	■	■
Easy care synthetics colourfast	up to 50°C	■	■	■	■
Cottons/linens colourfast	up to 40°C	■	■	■	■
Machine washable woollens	up to 40°C	■	■	■	■
Delicates	up to 40°C	■	■	■	■
Additional programmes		■	■	■	■
2 temperature drying				■	■
spin speed	rpm	1000	1400	1200	1400
CAPACITIES					
Drum	litres	42	42	42	42
Maximum wash load	kg	4.5	4.5	4.5	4.5
Maximum dry load	kg			2.25	2.25
Wash powder dispenser (front filling)					
for pre-wash		■	■	■	■
for main wash		■	■	■	■
fabric conditioner		■	■	■	■
EU ENERGY EFFICIENCY INFORMATION					
Energy efficiency class (A-G)[2]		A	A	D	C
Energy consumption (wash/spin/dry)[4]	kWh/cycle			4.4	4.15
Energy consumption (wash/spin only)[5]	kWh/cycle	0.85	0.85	0.90	0.90
Washing performance class (A-G)[2]		A	A	A	A
Spin efficiency (A-G)[2]		C	B	B	B
Water extraction efficiency	%	60	52	53	52
Maximum spin speed	rpm	1000	1400	1200	1400
Washing capacity	kg	4.5	4.5	4.5	4.5
Drying capacity	kg			2.25	2.25
Water consumption (wash/spin/dry)[4]	litres/cycle			91	87
Water consumption (wash/spin only)[5]	litres/cycle	40	40	40	40
Washing and drying programme time[4]	mins			215	220
Washing programme time[5]		125	125	125	125
Average annual energy consumption always using dryer[3]	kWh/year	170	170	880	830
Average annual energy consumption never using dryer[1]	kWh/year			180	180
Average annual water consumption always using dryer[3]	litres/year			18200	17600
Average annual energy consumption never using dryer[1]	litres/year	8000	8000	8000	8000
ELECTRICAL AND WATER CONNECTION					
Voltage/frequency Volts/Hz		240/50	240/50	240/50	240/50
Connected load Watts		2050	2050	2050	2050
Fuse rating A		13	13	13	13
Cold fill (inlet hoses supplied with 3/4" threaded hose connection)		■	■	■	■
Water Research Council Approved		■	■	■	■
APPLIANCE DIMENSIONS					
Height	mm	820	820	850	850
Width	mm	600	600	600	600
Depth	mm	540	540	545	545
Depth with door open	mm	1140	1140	1140	1140
Height adjustment	mm	20	20	20	20
Fixed plinth recess	(depth)	Y/90	Y/90	Y/90	Y/90
Furniture door fixing (integrated model)		Y	Y	Y	Y
Net weight	kg	69.5	75	78	78.5
APERTURE DIMENSIONS					
Height	mm	820	820	820	820
Width	mm	600	600	600	600
Depth	mm	600	600	600	600
PACKAGED DIMENSIONS					
Height	mm	930	930	930	930
Width	mm	650	650	650	650
Depth	mm	650	650	650	650
Gross weight	kg	72	77.5	81	81

1) Average annual consumption for a 4 person household based on 200 standard 60˚C cotton cycles, never using the dryer
2) Models with an 'A' rated classification offer a higher performance than those with a 'G' rating
3) Average annual consumption for a 4 person household based on 200 standard 60˚C cotton cycles, always using the dryer
4) Based on standard test results for 60˚C cotton cycle and "dry cotton" drying cycle
5) Based on standard test results for 60˚C cotton cycle

PRODUCT SPECIFICATIONS COOLING

PRODUCT / MODEL		Santo Z 912004i	Santo K 912004i	Santo K 912404i	Santo K 988004i	Arctis G 988504i	Santo K 988404i	Santo K 718404i	Santo K 788004i	Arctis G 788504i
FRIDGE FEATURES										
Defrost		Auto	Auto	Auto	Auto		Auto	Auto	Auto	
"Bacteria Safe System"		■	■	■	■		■	■	■	
Electronic temperature controls with digital LED display		■	■	■	■		■			
COOLMATIC		■	■	■	■		■			
Holiday Setting			■		■					
SET Electronic controls										
Electromechanical temperature controls										
Adjustable thermostat coin/ knob								■	■	
Dairy compartment with lid		■	■	■	■		■	■	■	
Full width can shelves/ & holders		1/1	3/3	3/3	2/2		2/2	2/-	2/-	
1/2 depth can shelf								2		
1/2 width sliding shelf/ with lid			1/1	1/1						
Bottle rack with holder/ & slider		1/1	1/1	1/1	1/1		1/1	1/-	1/-	
Air circulation fan		■								
Air purifier		■								
Glass shelves (full depth)		3	4	2	2		1	3	2	
Glass shelves (half depth)		2	2	2	2		2	2	2	
Flexible shelf positions		■	■	■	■		■	■	■	
Anti-roll bottle support		■								
LONGFRESH Chill zone (0-3°C)		■								
2 chill zone drawers on telescopic runners		■								
Deep Salad drawer on telescopic runners								■		
Full width transparent salad bin with 2 half width hinged glass lids										
Full width transparent salad bin with frosted glass lid									■	
2 half width salad bins with full width glass cover			■	■	■		■			
Humidity control (for salad crispers or chill zones)		■	■	■	■		■			
Interior light		■	■	■	■		■	■	■	
Egg container		■	■	■	■		■	■	■	
Butter dish		■	■	■	■		■	■	■	
FREEZER FEATURES										
Frost Free										
Defrost - freezer				Manual		Manual	Manual	Manual		Manual
Electronic temperature controls with digital LCD display				■		■	■			
FROSTMATIC				■		■	■			
Adjustable thermostat coin/ knob								■	■	■
On LED (Green)				■		■	■			■
Fast freeze function with timed auto switch off										
Fast freeze Function										■
Fast freeze LED (Yellow)										■
High temperature warning LED (Red)										■
High temperature warning audible buzzer						■				■
Door open warning light/ audible buzzer										■ /-
Freezer compartments (drawers)				1		4	1	1		4
Transparent/ solid white freezer compartments				White		Transparent	White	White		White
Freezer shelf								1		
Freezer calendar						■				■
Ice cube tray				■		■	■	■		■
Ice scraper				■		■	■	■		■
Ice packs (accumulators)						2				1
OTHER FEATURES										
Adjustable feet										
Reversible Doors		■	■	■	■	■	■	■	■	■
100% CFC free		■	■	■	■	■	■	■	■	■
100% HFC free		■	■	■	■	■	■	■	■	■
Matching fridge/ freezer					AG988504i	SK988004i			AG788504i	SK788004i
Fridge freezer split										
ENERGY EFFICIENCY INFORMATION										
Energy efficiency class*		A+	A+	A+	A+	A+	A+	A	A	A
Energy consumption kWh/year**		146	131	197	117	197	175	310	150	208
Noise, IEC 704-3,	dB(A)	36	33	34	33	35	34	36	38	36
Gross capacity fridge	litres (cu.ft)	143(5.0)	227(8.0)	198(7.0)	157(5.5)		126(4.4)	277(9.8)	158(5.6)	
Net capacity fridge	litres (cu.ft)	135(4.8)	224(7.9)	189(6.7)	155(5.5)		117(4.1)	267(9.4)	154(5.4)	
Gross capacity chill zone	litres (cu.ft)	64(2.3)								
Net capacity chill zone	litres (cu.ft)	52(1.8)								
Gross capacity freezer	litres (cu.ft)			17(0.6)		110(3.9)	17(0.6)	35(1.2)		110(3.9)
Net capacity freezer	litres (cu.ft)			17(0.6)		94(3.3)	17(0.6)	35(1.2)		94(3.3)
Frozen food rating				4 star		4 star	4 star	4 star		4 star
Power cut safe hours***				12		26	12	20		20
Freezing capacity kg/ 24hours				2		16	2	3		16
Climate class****		SN/ST	SN/ST	SN/ST	SN/ST	SN/T	SN/ST	SN/ST	SN/ST	SN/ST
ELECTRICAL CONNECTION										
Connected load	W	90	100	90	70	80	100	120	100	100
Fuse rating	amps	13	13	13	13	13	13	13	13	13
PRODUCT DIMENSIONS										
Height	mm	1221	1221	1221	873	873	873	1772	873	873
Width	mm	556	556	556	556	556	556	540	540	540
Depth	mm	549	549	549	549	549	549	549	549	549
Net Weight	kg	50	44	46	35	37	33	63	30	33.5
APERTURE DIMENSIONS										
Height	mm	1225	1225	1225	880	880	880	1780	880	880
Width	mm	560	560	560	560	560	560	560	560	560
Depth	mm	550	550	550	550	550	550	550	550	550
Door Fixing		Door on door	Door on door	Door on door	Door on door	Door on door	Door on door	Slider	Slider	Slider
PACKAGING INFORMATION										
Height	mm	1320	1320	1320	960	980	960	1860	960	960
Width	mm	610	610	610	620	620	620	610	610	600
Depth	mm	610	610	610	610	620	610	610	610	620
Gross Weight	kg	52	46	48	39	40	37	68	33	36

* Energy efficiency class based on a scale of A (most efficient) to G (least efficient)

** Based on standard test results for 24 hours in accordance with EN153. Actual consumption will depend on how the appliance is used and where it is located

*** Time for food temperature to rise from -18°C to 9°C with the power off and the door remaining closed

**** Climate class - the product is suitable for use in ambient temperatures of SN: 10-32°C, N:16-32°C, ST: 18-38°C, T: 18-43°C

Installation diagrams

PRODUCT SPECIFICATIONS COOLING	PRODUCT	COOLING								
	MODEL	Santo U 860004i	Arctis U 860504i	Santo U 960404i	Santo N 718404i	Santo C 818434i	Santo C 718404i	Santo C 718414i	Santo C 816414i	Santo C 714404i
FRIDGE FEATURES										
Defrost		Auto		Auto	Auto	Auto	Auto	Auto	Auto	Auto
"Bacteria Safe System"		■		■	■	■	■	■	■	■
Electronic temperature controls with digital LED display										
COOLMATIC										
Holiday Setting										
SET Electronic controls					■					
Electromechanical temperature controls						■			■	
Adjustable thermostat coin/ knob		■		■	■	■	■	■	■	■
Dairy compartment with lid		■		■	■	■	■	■	■	■
Full width can shelves/ & holders					2/-	2/2	2/-	2/-	1/1	2/-
1/2 depth can shelf										
1/2 width sliding shelf/ with lid		1/1		1/1	1/-	1/1	1/-		1/1	
Bottle rack with holder/ & slider		1/-		1/-	1/-	1/1	1/-	1/-	1/1	1/-
Air circulation fan										
Air purifier										
Glass shelves (full depth)		2		1	3	3	3	2	2	2
Glass shelves (half depth)		2		2	2	2	2	2	2	2
Flexible shelf positions		■		■	■	■	■	■	■	■
Anti-roll bottle support										
LONGFRESH Chill zone (0°-30°C)										
2 chill zone drawers on telescopic runners										
Deep Salad drawer on telescopic runners										
Full width transparent salad bin with 2 half width hinged glass lids		■		■						
Full width transparent salad bin with frosted glass lid										
2 half width salad bins with full width glass cover					■	■	■	■	■	■
Humidity control (for salad crispers or chill zones)						■			■	
Interior light		■		■	■	■	■	■	■	■
Egg container		■		■	■	■	■	■	■	■
Butter dish		■		■	■	■	■	■	■	■
FREEZER FEATURES										
Frost Free					■					
Defrost - freezer			Manual	Manual	Auto	Manual	Manual	Manual	Manual	Manual
Electronic temperature controls with digital LCD display										
FROSTMATIC										
Adjustable thermostat coin/ knob		■	■	■	■	■	■	■	■	■
On LED (Green)			■							
Fast freeze function with timed auto switch off					■					
Fast freeze Function			■			■			■	
Fast freeze LED (Yellow)			■		■	■			■	
High temperature warning LED (Red)			■							
High temperature warning audible buzzer			■							
Door open warning light/ audible buzzer			■ / ■							
Freezer compartments (drawers)			4	1	3	3	3	4	3	2
Transparent/ solid white freezer compartments			Transparent	White	White	Transparent	White	White	Transparent	White
Freezer shelf										
Freezer calendar			■		■	■	■	■	■	■
Ice cube tray			■	■	■	■	■	■	■	■
Ice scraper			■	■		■	■	■	■	■
Ice packs (accumulators)			2		2	2	2	2	2	1
OTHER FEATURES										
Adjustable feet		■	■	■						
Reversible Doors		■	■	■	■	■	■	■	■	■
100% CFC free		■	■	■	■	■	■	■	■	■
100% HFC free		■	■	■	■	■	■	■	■	■
Matching fridge/freezer		AU860504i	SU860004i							
Fridge freezer split					70:30	70:30	70:30	50:50	60:40	70:30
ENERGY EFFICIENCY INFORMATION										
Energy efficiency class*		A	A	A+	A	A	A	A	A	A
Energy consumption kWh/year**		135	208	168	314	314	314	321	299	292
Noise, IEC 704-3,	dB(A)	35	38	35	38	36	36	36	36	36
Gross capacity fridge	litres (cu.ft)	142 (5.0)		105 (3.7)	214 (7.6)	209 (7.4)	214 (7.6)	173 (6.1)	169 (6.0)	173 (6.1)
Net capacity fridge	litres (cu.ft)	140 (4.9)		103 (3.6)	210 (7.4)	205 (7.2)	210 (7.4)	170 (6.0)	165 (5.8)	170 (6.0)
Gross capacity chill zone	litres (cu.ft)									
Net capacity chill zone	litres (cu.ft)									
Gross capacity freezer	litres (cu.ft)		108 (3.8)	17 (0.6)	68 (2.4)	76 (2.7)	76 (2.7)	110 (3.9)	76 (2.7)	62 (2.2)
Net capacity freezer	litres (cu.ft)		100 (3.5)	17 (0.6)	55 (1.9)	70 (2.5)	70 (2.5)	92 (3.2)	70 (2.5)	60 (2.1)
Frozen food rating			4 star	4 star	4 star	4 star	4 star	4 star	4 star	4 star
Power cut safe hours***			29	13	21	24	24	24	24	22
Freezing capacity kg/24hours			18	2.5	4	4	4	10	8	6
Climate class****		SN/ST	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST	SN
ELECTRICAL CONNECTION										
Connected load	W	70	90	80	160	130	120	160	130	100
Fuse rating	amps	13	13	13	13	13	13	13	13	13
PRODUCT DIMENSIONS										
Height	mm	815	815	815	1772	1768	1772	1772	1575	1441
Width	mm	596	596	596	540	556	540	540	556	540
Depth	mm	550	550	550	549	549	549	549	549	549
Net Weight	kg	34	38	37	59	63	58	59	60	48.5
APERTURE DIMENSIONS										
Height	mm	820/870	820/870	820/870	1780	1780	1780	1780	1580	1446
Width	mm	600	600	600	560	560	560	560	560	560
Depth	mm	560	560	560	550	550	550	550	550	550
Door Fixing		Door on door	Door on door	Door on door	Slider	Door on door	Slider	Slider	Door on door	Slider
PACKAGING INFORMATION										
Height	mm	880	880	880	1860	1870	1860	1860	1680	1510
Width	mm	670	670	670	610	620	610	610	620	600
Depth	mm	600	600	600	610	620	610	610	620	620
Gross Weight	kg	37	41	40	64	68	63	64	65	52

* Energy efficiency class based on a scale of A (most efficient) to G (least efficient)

** Based on standard test results for 24 hours in accordance with EN153. Actual consumption will depend on how the appliance is used and where it is located

*** Time for food temperature to rise from -18°C to 9°C with the power off and the door remaining closed

**** Climate class - the product is suitable for use in ambient temperatures of SN: 10-32°C, N:16-32°C, ST: 18-38°C, T: 18-43°C

FORM function

PERFEKT IN FORM UND FUNKTION

AEG

Ovens, Microwaves & Coffee Machine

Built-In Double Ovens
D88004, D57014, D41014, D21004



Min. distance between cabinet doors: 907mm

90cm wide Single Oven
B81394

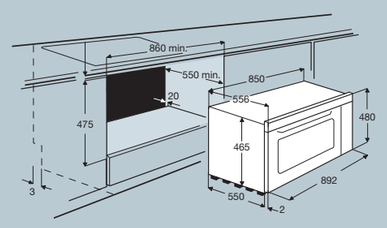

Built-In Microwave Ovens
MCC663E



Double Under-Counter Ovens
U71014, U31004

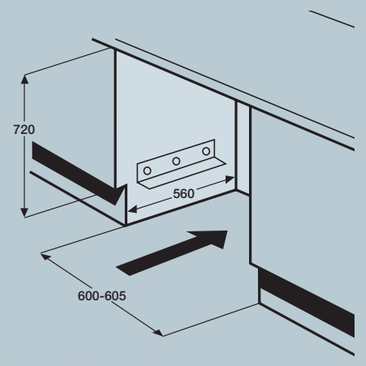

60cm wide Single Ovens
CB89201, B88714, B57414, B41014, B31014, B21004, B11804

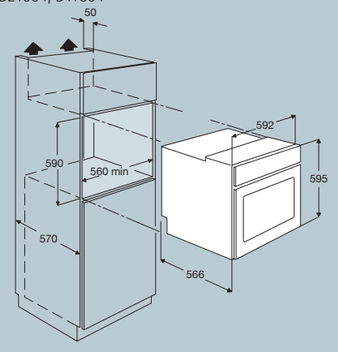

MC143EU and MCD343EU with Built-in Kit BF 175 (500 mm wide cupboard), BF 176 (600 mm wide cupboard)

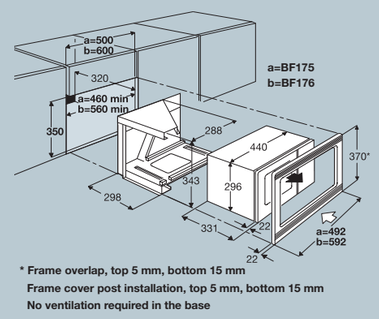

*** Frame overlap, top 5 mm, bottom 15 mm**
Frame cover post installation, top 5 mm, bottom 15 mm
No ventilation required in the base

Built-In Microwave Ovens

MC143EU and MCD343EU with Built-in Kit BF 175 (500 mm wide cupboard), BF 176 (600 mm wide cupboard)

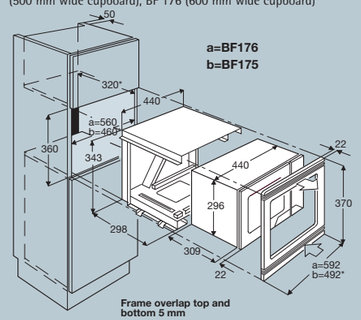

***Built into a 50 cm wide unit**

MCD3534E and MC153E with Built-in Kit BF 246

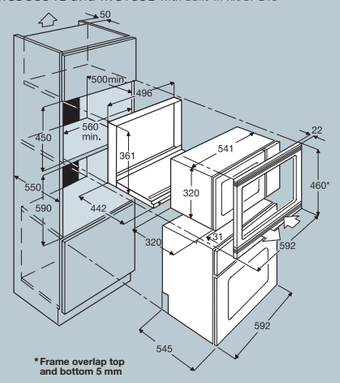

Coffee Machine/drawer
PE8038M coffee machine and PES8038M accessory drawer

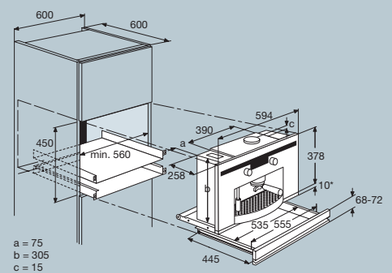

MC143EU and MCD343EU with Built-under Kit UMS 17

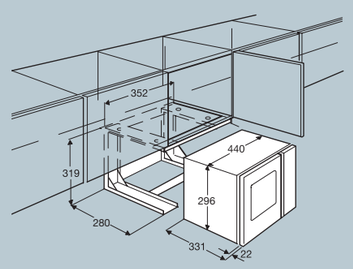

MC153E with Built-under Kit BF 246

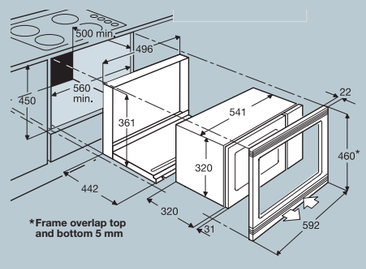

PBM8036



***Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk**

Front-Line Classic Hobs

C6530DGm/C6531DGm#

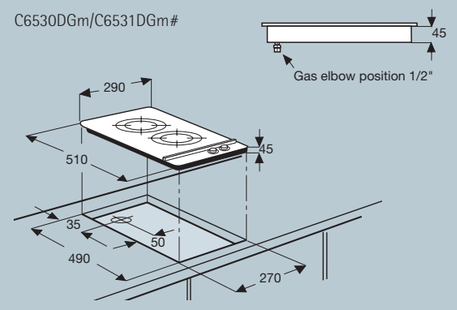

C6561Gm/C6562Gm#

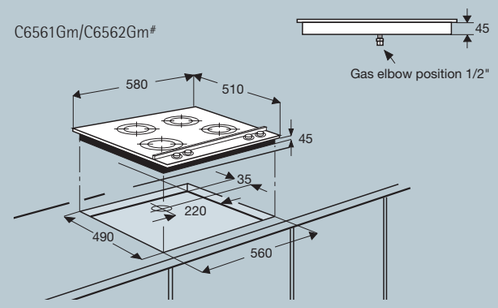

C353WKm/C3531WKm

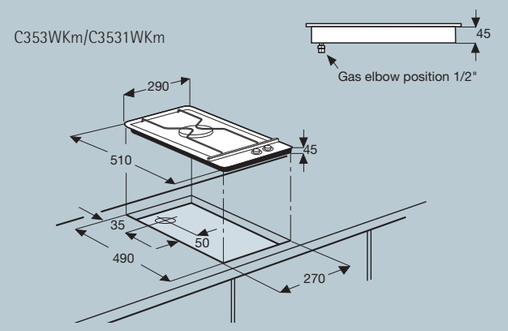

C231GRm #

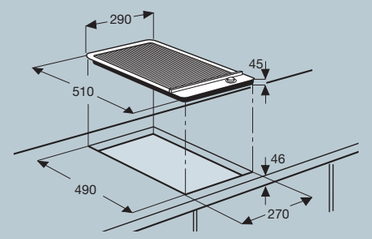

C6310DKm#

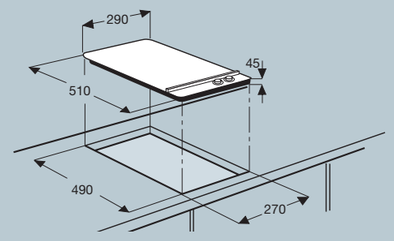

C6310Km#

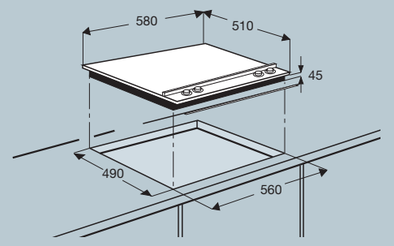

C130FGm#

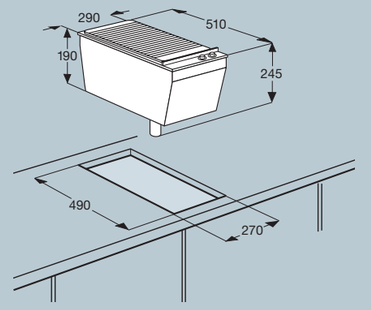

C115DDm#

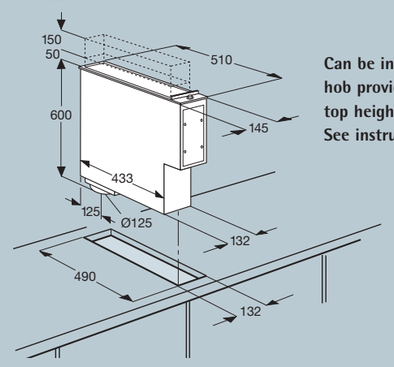

Can be installed next to a gas hob provided setting fixed to top height position.
See instruction book for details.

#See page 86 for installation information. *Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk

Front-Line Future Hobs

FM4300G / FM4360G

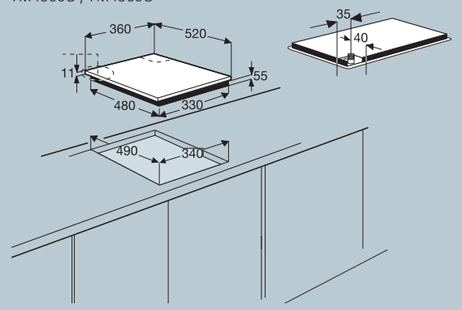

FM4300G alternative

X = 55 mm for wok/2 br gas
X = 38 mm for ceramic/induction

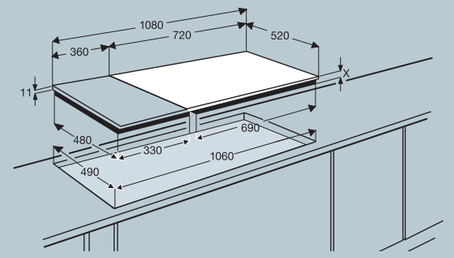

FM7300G

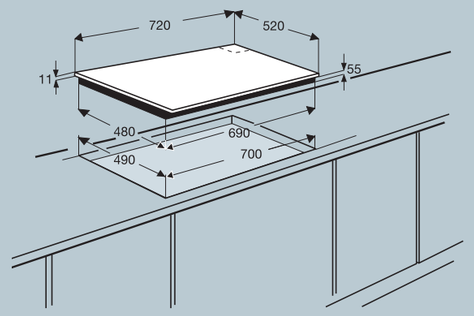

FM6300G

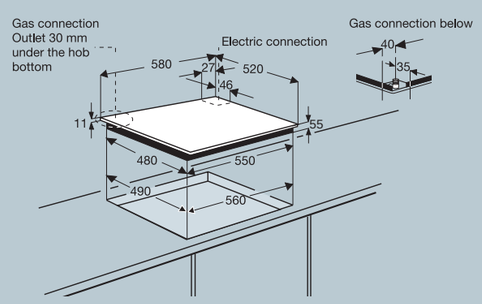

FM4513K

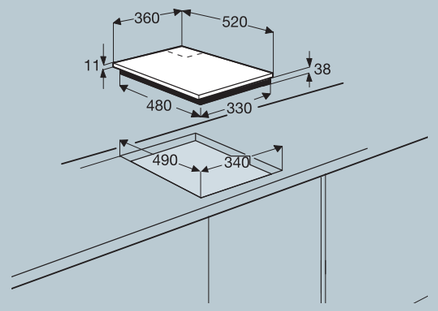

FM6520K

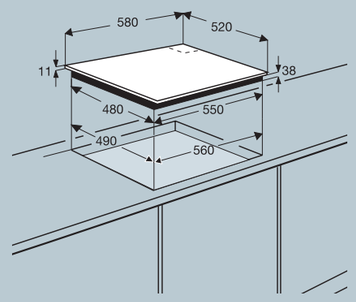

FM7531K

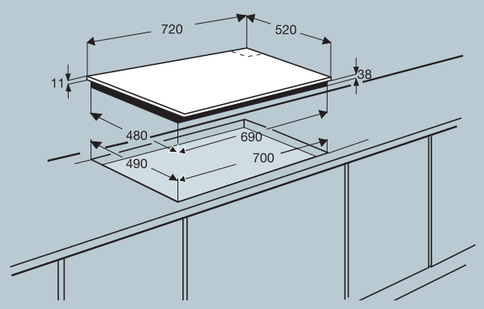

FM4803K

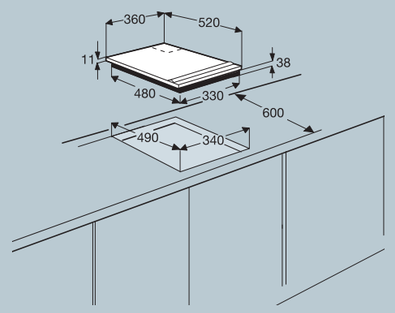

#See page 84 for installation information. *Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk

Front-Line Future Hobs/Hoods

FM7803K

X = 66 mm for wok/2 br gas
X = 49 mm for ceramic/induction

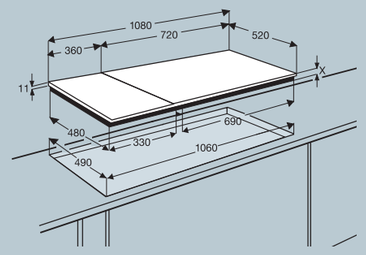

FM4500GR

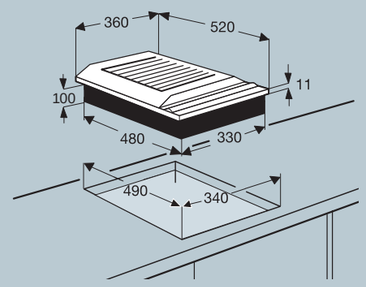

FM2500DD

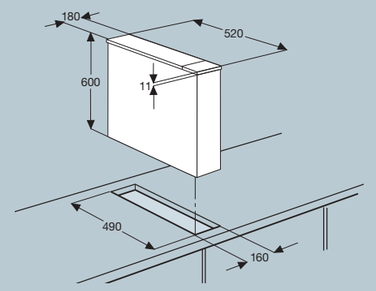

FM6000LD

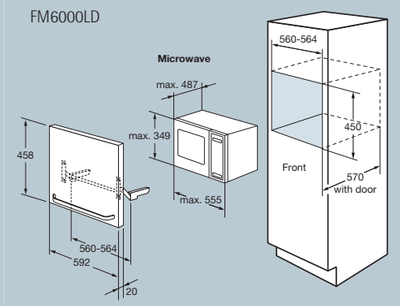

HD8890

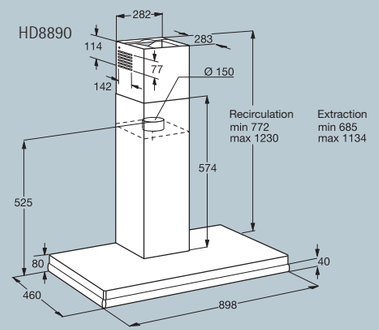

HD8820

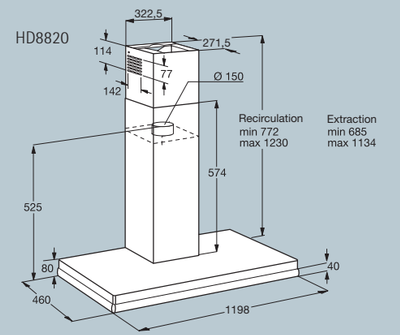

Hi8820

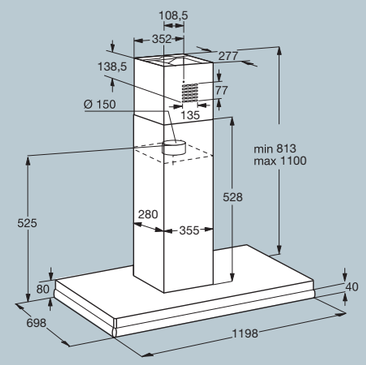

***Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk**

Hobs

Induction Hobs

68001KF



96901KFE

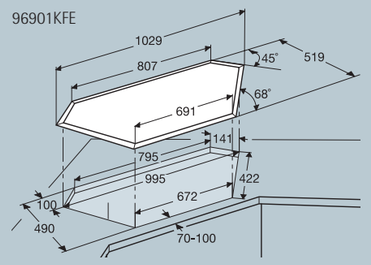

66201KF, 6410KF



79852G

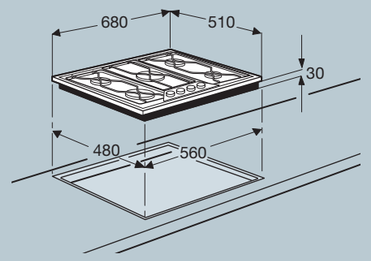

34942G

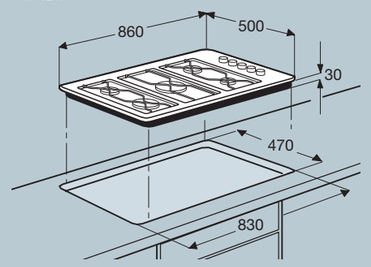

Touch Control Hobs

76301KF

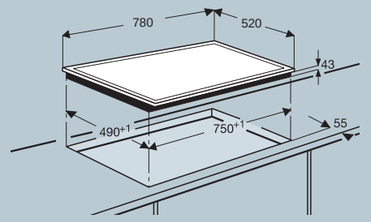

67600KF



Ceramic Hobs

C6010K



69802G

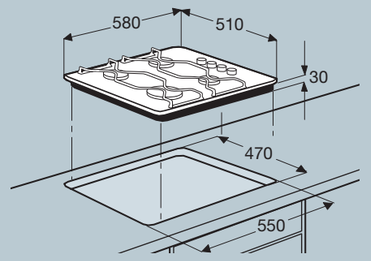

35772G

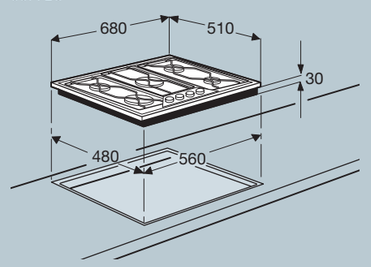

79301KF

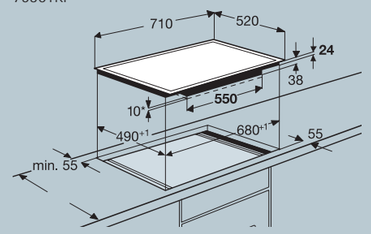

66300KF



Gas on Glass Hobs

99852G



Gas Hobs

95752G

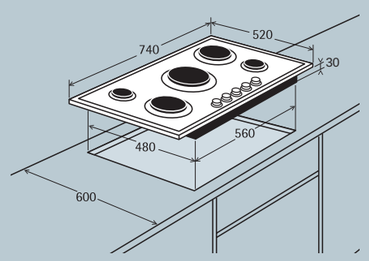

34602G, 21602G

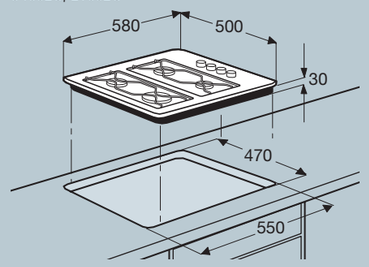

***Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk**

Hoods

Sealed Plate Hob

111K

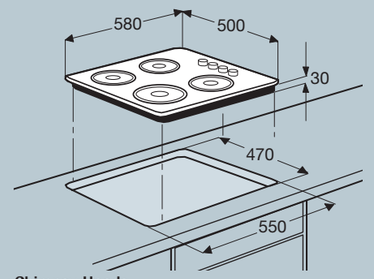

Chimney Hoods

Hi8610

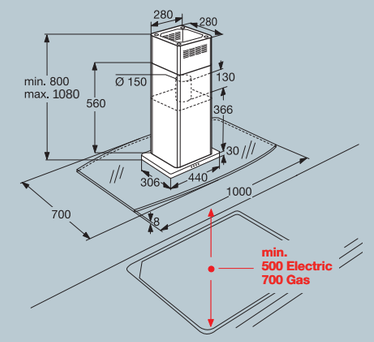

C2020D

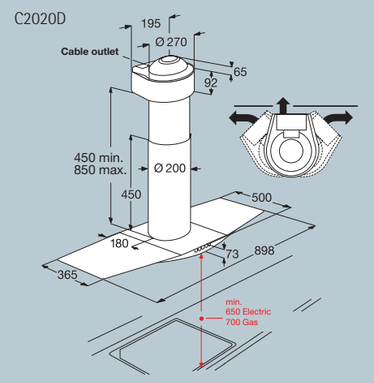

HC5690

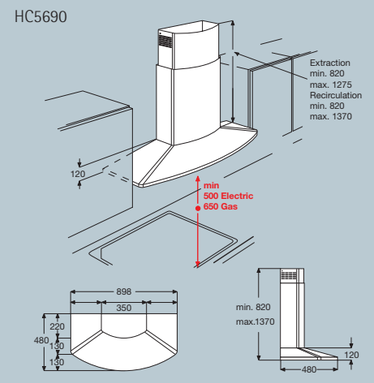

Designer Hood

HD8795, HD8760*



HD8694/CH700*

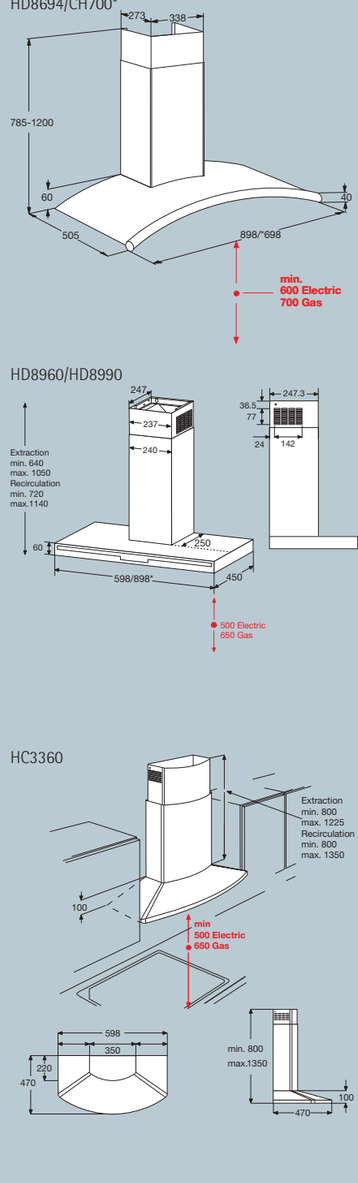

HD8960/HD8990

HC3360

Professional Hood

CHDD8509/CHDD8510

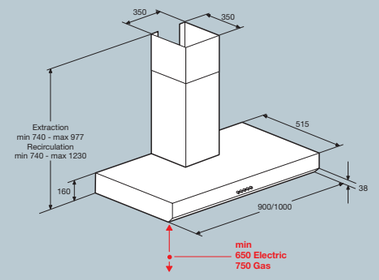

C2060D

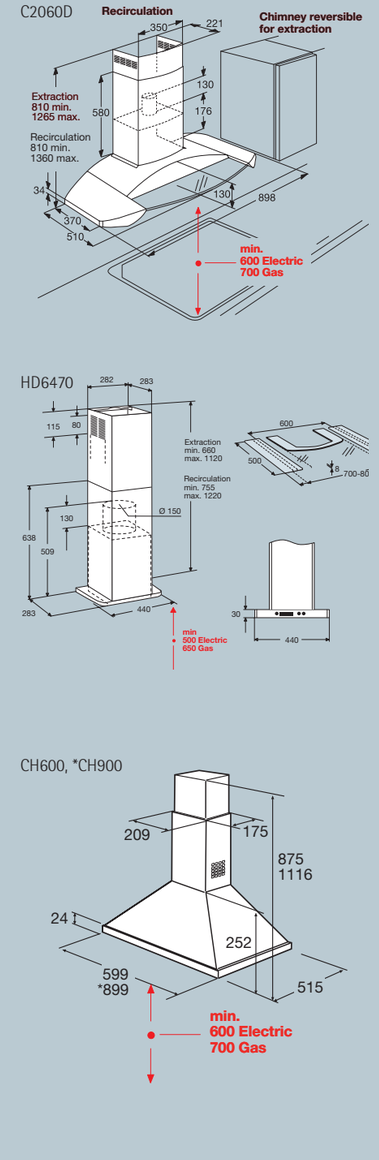

HD6470

CH600, *CH900

Hoods

Telescopic Hood

CH695T

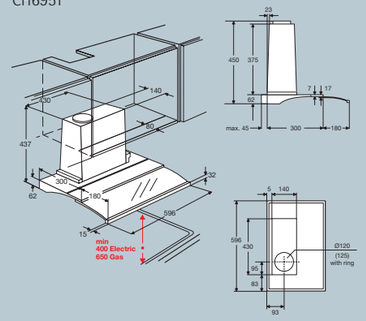

HL4150



Integrated Hoods

HE3160/HE6260

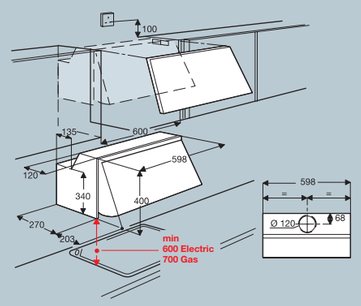

Ducting kits

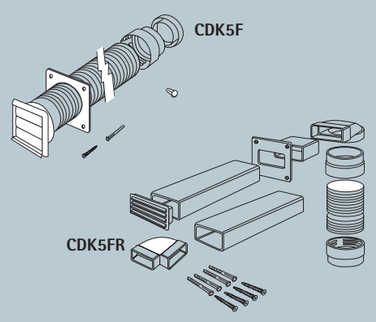

Canopy Hoods

HL7275



C502D



Standard Hood

HU3360/HU4360



Splashbacks EFB60, EFB90, EFB120



C570D



Splashbacks SK3060, SK3090



***Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk**

Dishwashers & Laundry

60cm wide, semi-integrated dishwashers

FAVORIT 65070i, FAVORIT 44070i, FAVORIT 88070i



FAVORIT 65070U

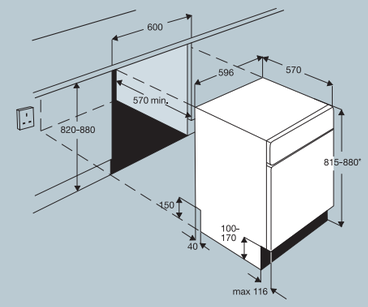

Fully integrated compact dishwasher

FAVORIT 45250Vi

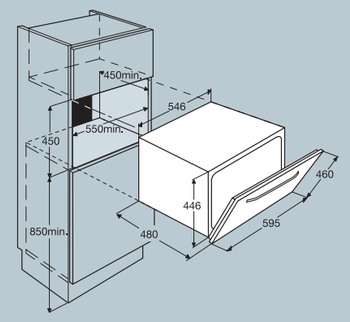

60cm wide, fully-integrated extra height dishwasher

FAVORIT 64070ViL

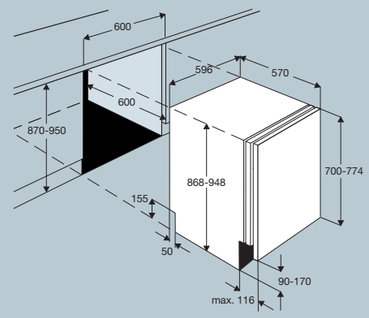

60cm wide, fully-integrated dishwashers

FAVORIT 86070Vi, FAVORIT 44070Vi,
FAVORIT 88070Vi



55cm wide, fully-integrated in-column dishwasher

FAVORIT 64570Vi

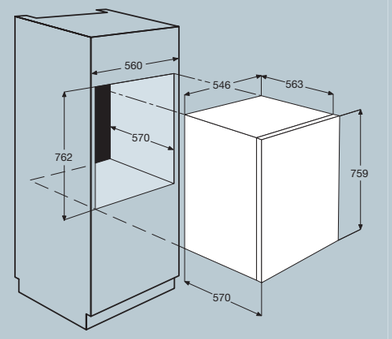

45cm wide, fully-integrated dishwasher

FAVORIT 84470Vi



Laundry

LAVAMAT 10505Vi, LAVAMAT 14500Vi
LAVAMAT 12700ViT, LAVAMAT 14700ViT

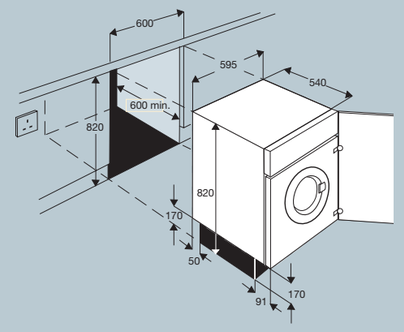

***Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk**

Refrigeration

Refrigeration

Integrated Fridges

SANTO K 718404i

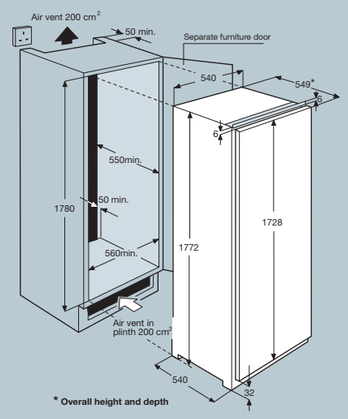

SANTO K 912004i, SANTO K 912404i, Z912004i

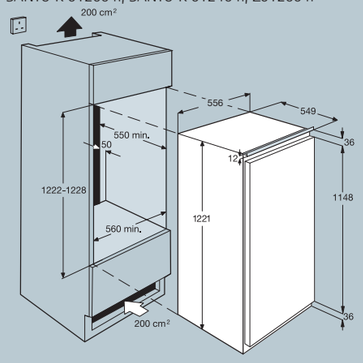

Integrated Fridges and Freezer

ARCTIS G 988504i, stacked in column with SANTO K 988004i

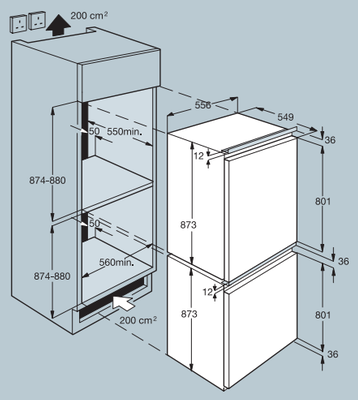

ARCTIS G 788504i stacked in-column with SANTO K 788004i

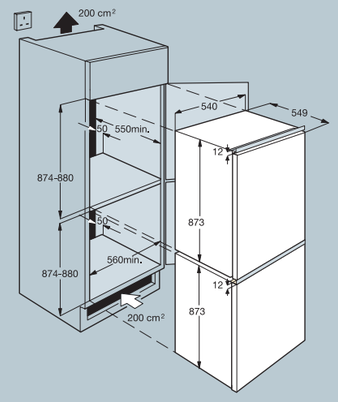

SANTO K 988004i, SANTO K 988404i, ARCTIS G 988504i



*SANTO K 788004i, *ARCTIS G 788504i



Built-Under Fridges and Freezers

SANTO U 860004i, SANTO U 960404i, ARCTIS U 860504i



SANTO N 718404i Frost-Free, SANTO C 718404i

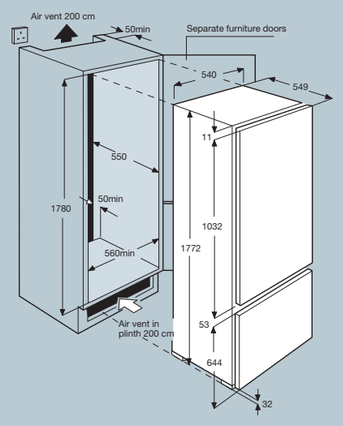

SANTO C 818434i

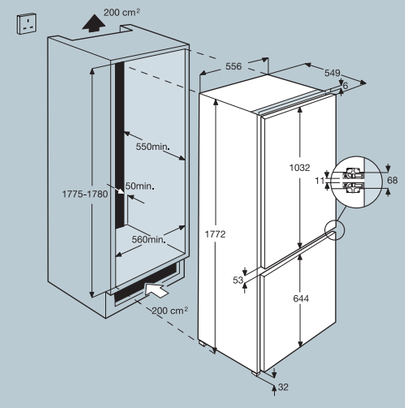

SANTO C 718414i

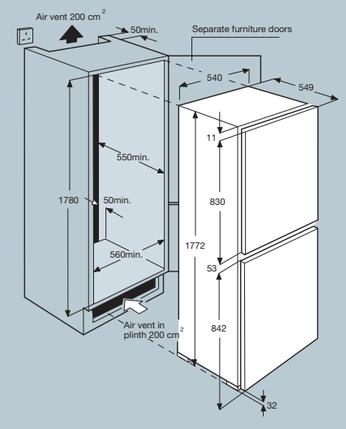

SANTO C 816414i

SANTO C 714404i

***Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk**

***Refer to instruction manual before cutting out. Instruction manuals are available from www.serviceforce.co.uk**

notes

CUSTOMER CARE

Responsive Customer Care/After Sales Service
Once you've bought an AEG appliance you're safe in the knowledge that in the unlikely event of a fault occurring you can rely on a commitment to look after your appliance throughout its working life. Over five hundred, fully trained service engineers are available nationwide and our complete care service is one of the most extensive and reliable available.

12 Months Parts and Labour Guarantee
In the unlikely event of any repairs being required in the first year, we will carry them out free of charge. In addition, any repairs carried out after the guarantee period are covered by their own 12 months guarantee.

Rapid Service
If you call us out under the 12 months guarantee, we endeavour to fix the appliance within seven working days of our first call.

Customer Care
55-77 High Street, Slough
Berkshire SL1 1DZ
Telephone: (08705) 350350
Fax: (01753) 538972
e-mail: customer.care@aeg.co.uk

KITCHEN SPECIALISTS ASSOCIATION KSA *Corporate Member*

PHOTOGRAPHY

All kitchen photography was taken at Johnson & Johnson, 12-19 Guinness Road Trading Estate, Trafford Park, Manchester M17 1SB.

LOCAL SERVICE, NATIONWIDE

The Service Force network aims to provide:

Same Day Service
Call before 10am and we will endeavour to be with you the same day*

Next Day Service
For calls booked after 10am we will be with you the next day*

Service by Appointment
To allow you to plan your day we can offer an appointment within a 3 hour time period, when the call is booked two days in advance*

*Please note: This service pledge does not apply in the Republic of Ireland
(*Excludes Saturdays, Sundays and Bank holidays and may not be available in rural or outlying areas)

SERVICE FORCE NETWORK:

Telephone: (08705) 929929

EU Energy Efficiency Information
This scheme, which covers refrigerators, freezers, washing machines, tumble dryers, dishwashers and electric ovens is designed to offer consumers a standardised method of choosing the most energy efficient appliances. For refrigerators and freezers, as well as stating the Energy Efficiency Class ('A' – most efficient, 'G' – least efficient) the label also gives the annual electricity consumption (i.e. running cost) and the usable storage capacity. For washing machines the label also states the wash performance and spin efficiency. Three ratings are given to ensure energy efficiency combined with effective washing and drying. For dishwashers the label states energy efficiency, washing and drying performance.
For electric ovens the label also states the energy consumption (in kWh) and the usable volume of the oven. If the oven is a double oven it will carry this information for both ovens.

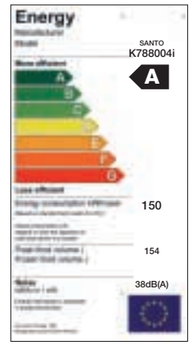

From the Electrolux Group. *The world's No.1 choice.*

The Electrolux Group is the world's largest producer of powered appliances for kitchen, cleaning and outdoor use. More than 55 million Electrolux Group products (such as refrigerators, cookers, washing machines, vacuum cleaners, chain saws and lawn mowers) are sold each year to a value of approx. USD 14 billion in more than 150 countries around the world.